

A photograph of a tropical road scene. A large splash of water is visible on the road surface, creating a misty spray. The road is lined with palm trees and other tropical vegetation. A silver car is parked on the left side of the road, and a yellow vehicle is visible in the background. The scene is set against a backdrop of a clear blue sky.

Kosrae Shoreline Management Plan

Repositioning for resilience

Kosrae Shoreline Management Plan

Repositioning for resilience

Authors/Contributors:

Doug Ramsay, NIWA
Arthur Webb, SPC-SOPAC
Simpson Abraham, FSM PACC Coordinator
Robert Jackson, Kosrae Island Resource Management Authority
Blair Charley, Kosrae Island Resource Management Authority

For any information regarding this report please contact:

Mr Doug Ramsay
Manager, Pacific Rim
+64-7-859 1894
Doug.Ramsay@niwa.co.nz

National Institute of Water & Atmospheric Research Ltd
Gate 10, Silverdale Road
Hillcrest, Hamilton 3216
PO Box 11115, Hillcrest
Hamilton 3251
New Zealand
Phone +64-7-856 7026
Fax +64-7-856 0151

NIWA Client Report No: HAM2013-133
Report date: November 2013
NIWA Project: DGI13201

© All rights reserved. This publication may not be reproduced or copied in any form without the permission of the copyright owner(s). Such permission is only to be given in accordance with the terms of the client's contract with NIWA. This copyright extends to all forms of copying and any storage of material in any kind of information retrieval system.

Whilst NIWA has used all reasonable endeavours to ensure that the information contained in this document is accurate, NIWA does not give any express or implied warranty as to the completeness of the information contained herein, or that it will be suitable for any purpose(s) other than those specifically contemplated during the Project or agreed by NIWA and the Client.



8

Foreword

10

Executive summary

12

Introduction

20

Current and foreseeable coastal hazard issues

25

Adaptation foundations

30

Repositioning

43

Defending

51

Monitoring adaptation progress

54

References and bibliography

57–97

Appendices

Appendix A: Summary of progress on the recommendations made in the Shoreline Management Plan in 2000.

Appendix B: An overview of coastal change on Kosrae.

Appendix C: An overview of coastal inundation on Kosrae.

Appendix D: Climate change and sea-level rise.



Deutsche Gesellschaft für Internationale Zusammenarbeit (GIZ) GmbH is a federally-owned agency that implements technical cooperation programmes on behalf of the German Government and other donors. This Study was undertaken under the SPC/GIZ regional programme Coping with Climate Change in the Pacific Island Region (CCCPIR).



Contents

Figures

| | | |
|-------------|---|----|
| Figure 1: | Map showing locations of municipal boundaries, roads, villages and place names on Kosrae. | 11 |
| Figure 2: | Development between 1944 and 2012 in Malem. | 12 |
| Figure 3: | Location of residential development. | 13 |
| Figure 4: | Examples of human impacts that have caused or exacerbated the potential for coastal erosion and inundation impacts on Kosrae. | 14 |
| Figure 5: | Recent examples of poor development activities that will lead to further coastal hazard-related problems and are not sustainable or effective in the long-term. | 18 |
| Figure 6: | Aerial photograph of the north-east Kosrae coast in 1944 (left) and the remnants of the rubble ridge in 2013 at Putukte (right). | 20 |
| Figure 7: | Summary of key locations and types of coastal change likely to be experienced on Kosrae over the next one to two generations. | 20 |
| Figure 8: | Overwashing of the road in South Malem during Tropical Storm 31W in December 2001 (top) and at Tafunsak during the December 2008 large swell event (bottom). | 22 |
| Figure 9: | Low-lying reclaimed areas on Lelu Island (top) and Utwe village (bottom). | 22 |
| Figure 10: | Summary of key locations where coastal inundation issues will increase on Kosrae over the next one to two generations. | 23 |
| Figure 11: | The best coastal defence on Kosrae. | 25 |
| Figure 12: | Low-lying coastal areas where restrictions on further development are required. | 29 |
| Figure 13: | Potential primary and secondary sealed road network on Kosrae by the 2050s. | 30 |
| Figure 14: | Priority section of the development of the inland road on Kosrae. | 34 |
| Figure 15: | Indicative inland road between Utwe and Malem showing the requirements of new and upgraded sections of road. | 36 |
| Figure 16: | Inland road section between Mutunnenea and Sialat. | 37 |
| Figure 17: | Inland road section between Sialat and Yekula. | 39 |
| Figure 18: | Inland road section between Malem and Pilyuul. | 40 |
| Figure 19: | Inland road section between Pilyuul and Tenwak. | 41 |
| Figure 20: | The develop-defend-develop cycle. | 46 |
| Figure 21: | Location of where long term and transitional coastal defences will be required. | 49 |
| Figure 22: | Summary of coastal defence requirements over the foreseeable future. | 51 |
| Figure B1: | Basic shoreline types on Kosrae. | 63 |
| Figure B2: | Typical cross-sections for the coastline at Walung (top), Tafunsak village (middle) and between Yekula and Inkoeya (bottom). | 64 |
| Figure B3: | Key sediment sources, longshore transport processes, and sediment losses along the Tafunsak shoreline. | 65 |
| Figure B4: | Key sediment sources, longshore transport processes, and sediment losses along the Walung shoreline. | 66 |
| Figure B5: | Key sediment sources, longshore transport processes, and sediment losses along the Putukte to Finpukal shoreline. | 67 |
| Figure B6: | Typical cross-sections for the coastline at Pukusruk (top), Malem (middle) and Mosral (bottom). | 69 |
| Figure B7: | Location of the storm berm along the Malem coast. | 70 |
| Figure B8: | Basic process forming the storm berm along the eastern facing Lelu and Malem shorelines and southern coastline of Utwe. | 71 |
| Figure B9: | Aerial photograph of the north-east Kosrae coast in 1944 (top) and the remnants of the rubble ridge in 2013 at Putukte (bottom). | 71 |
| Figure B10: | Key sediment sources, longshore transport processes, and sediment losses along the Pukusruk shoreline. | 72 |

Figures

| | |
|--|-----|
| Figure B11: Key sediment sources, longshore transport processes, and sediment losses along the Malem shoreline. | 73 |
| Figure B12: Key mangrove settings on Kosrae. | 75 |
| Figure C1: High tide levels at Lelu during December 1999 (left) and Utwe during December 2010 (right). | 88 |
| Figure C2: Wave overwashing at Fukrin in Malem during February 2000 (left) and high tide wave overtopping of the seawall at Malem village during December 2010). | 89 |
| Figure C3: Debris from overwashing of the seawall at Tafunsak (left) and at Malsu (right) during the swell event of 8–9 December 2008. | 90 |
| Figure C4: Extent of inundation along the Tafunsak coastline during the swell event of 8–9 December 2008. | 90 |
| Figure D1: Measured sea levels within Lelu Harbour between 20 November 2011 to 20 November 2012. | 94 |
| Figure D2: Mean sea-level fluctuations between 1992 and 2012 for Kosrae showing effects of El Nino and La Nina periods on sea levels. | 95 |
| Figure D3: Percentage exceedence in mean level of the sea fluctuation for Pohnpei and the Marshall Islands. | 95 |
| Figure D4: Global distribution of the rate of absolute sea-level rise between October 1992 and April 2013 as measured by satellite altimeter data. | 97 |
| Figure D5: Absolute mean level of the sea measured at Kosrae by satellite between 1992 and 2013 and the range in IPCC AR4 sea level projections out to 2100. | 99 |
| Figure D6: High tide exceedence curves for the present day and for the 2030s, 2050s, 2070s and 2090s. | 101 |
| Figure D7: High tide exceedence curves for the present day and for the 2030s, 2050s, 2070s and 2090s relative to the level of the road at Tafuyat. | 101 |

Tables

| | |
|--|-----|
| Table 1: Coast protection functions of Kosrae’s natural environment and key impacts on this coast protection function. | 26 |
| Table 2: Indicative costs in US\$ for inland road and associated infrastructure development between Utwe and Malem. | 35 |
| Table 3: Indicative costs in US\$ for inland road and associated infrastructure development between Mutunnenea and Sialat. | 38 |
| Table 4: Indicative costs in US\$ for inland road and associated infrastructure development between Sialat and Yekula. | 38 |
| Table 5: Indicative costs in US\$ for inland road and associated infrastructure development between Malem and Pilyuul. | 40 |
| Table 6: Indicative costs in US\$ for inland road and associated infrastructure development between Pilyuul and Tenwak. | 41 |
| Table 7: Housing loan programmes available on Kosrae. | 44 |
| Table 8: Current and foreseeable future requirements and priorities for sections of coast requiring long term coastal defences. | 50 |
| Table 9: Current and foreseeable future requirements and priorities for transitional coastal defences. | 52 |
| Table 10: Summary of indicators as of late 2013 and goal over the next two generations. | 55 |
| Table C1: Types of coastal-related inundation events on Kosrae and an indication of their relative frequency of occurrence. | 87 |
| Table C2: Summary of past cyclones experienced on Kosrae. | 91 |
| Table C3: General cyclone tracks and resulting areas on Kosrae most likely to be affected by inundation. | 92 |
| Table D1: Relative sea-level rise rates on surrounding islands to Kosrae from the SEAFRAME tide gauge network. | 97 |
| Table D2: Suggested relative sea-level rise allowances relative to the present day for development planning and infrastructure design. | 100 |



GOVERNMENT OF KOSRAE

Office of the Governor

Post Office Box 158

Kosrae, Federated States of Micronesia 96944

Telephone: 691-370-3002/3003. Facsimile: 691-370-3162

Foreword

The high tides and flooding of land that we have experienced in January 2014 is another reminder of how exposed much of the development and communities on Kosrae are to the damaging effects of shoreline change, high tide and storm flooding. We now know that due to climate change and sea-level rise the impacts of such coastal hazards will become ever more frequent and damaging in the future.

Much development on Kosrae over the last two to three generations has occurred in low-lying coastal areas. We acknowledge that many of the approaches we presently use to manage the impacts of these hazards on development and our communities will be increasingly ineffective or unaffordable as sea-levels rise.

Going forward this provides some difficult challenges and changes facing our communities if we are to effectively reduce both present day and future coastal change impacts on what we value in Kosrae. It will involve thinking differently than we have done in the past, particularly concerning where we locate infrastructure, our communities and our homes. It will require our communities, municipalities and the state to all work together, to think long-term, to agree priority actions and to instigate timely and effective implementation.

This Shoreline Management Plan was an initiative in 2000 of the Development Review Commission (now Kosrae Island Resource Management Authority). Since the first Plan was produced, much more is now known of the potential changes that will be caused by climate change and sea level rise. This revision of the Shoreline Management Plan incorporates this information, what it means for coastal areas on Kosrae and the communities and development located there, and sets out a pathway over the next one to two generations to create a more resilient society and one that provides a secure foundation for our future generations to better manage the ever increasing impacts of climate change and sea-level rise on Kosrae.

Implementation of the Plan needs to start now. The threats to our environment, livelihoods and quality of life of our people have never been so great. We look forward to working with our development partners to assist Kosrae in successfully achieving the outcomes identified in the Plan, and to develop our local capacities so that Kosrae can take a greater responsibility in implementing the Plan.

Sincere thanks to the five village communities, Municipal staff, KIRMA, the FSM PACC Office, and the various Government offices on Kosrae who have helped shape the vision outlined in this plan. I would also like to thank the Deutsche Gesellschaft für Internationale Zusammenarbeit (GIZ) regional programme Coping with Climate Change in the Pacific Island Region (CCCPIR) for their ongoing support, and the Secretariat of the Pacific Community Applied Science and Technology Division (SPC-SOPAC) and the National Institute of Water & Atmospheric Research Ltd (NIWA) for their contributions in the preparation of this Plan.

Lyndon H Jackson

Governor, Kosrae State







Executive Summary

Most of the coastline on Kosrae, where this development has occurred, is prone to coastal hazards such as long-term shoreline change and episodic coastal inundation (particularly during times of high (king) tides, large swell and very occasionally due to typhoon events).

The effects of ongoing and future climate change and sea-level rise will increasingly exacerbate the impact that these coastal hazards have on infrastructure, the five village communities and residential homes. Climate change stress will also potentially adversely impact on natural protective functions provided by reef systems, seagrass beds, mangrove strands, wetland areas and the coastal berm.

The consequences of climate change and sea-level rise will not create any new hazards on Kosrae. Rather they will enhance existing coastal hazard issues. Over the next one to two generations, and beyond, climate change will progressively increase the frequency and impacts of coastal hazards such as erosion, wave overwash and flooding damage to existing property, infrastructure and communities on Kosrae. Increasingly it will make the situation too difficult for those currently located in exposed areas.

Considering actions to reduce the present risks to communities and infrastructure on Kosrae is a vital first step. We already understand that existing natural weather events, climate and sea-level variability can cause change and damage in Kosrae's coastal zone. Addressing these known issues of exposure is an effective way to start to reduce the coastal hazard impacts posed by future climate change.

However, beyond the next one to two generations

communities on Kosrae will need to adapt beyond the current range in variability and extremes. Adapting to these future impacts needs to start now and will require a different approach to development on Kosrae than has been practiced over the last 2 to 3 generations. Fundamentally this will mean a much greater emphasis on preventative measures that remove exposure to the hazard, rather than a primary focus on impact reduction (e.g., for example through continuing to build seawalls).

Furthermore, effective policy to reduce current coastal hazard-related risks to communities and infrastructure and achieve efficient and resilient development will need to promote well designed adaptation responses and build on existing approaches already underway in Kosrae.

The following principles are key for successful adaptation and reduction of present and future coastal hazard risks to Kosrae communities and infrastructure over the next few generations:

1. The continued careful management of Kosrae's natural environment and resources is fundamental for effective and sustained protection from coastal hazards and long term adaptation.
2. A primary focus on where to build.
3. A focus also on how to build.
4. A recognition that in most situations a reliance on impact reduction measures such as coastal defences are not a long-term option for achieving resilient infrastructure and communities on Kosrae.
5. Effective adaptation needs to start now.

Strategies

Based on these principals eight key strategies have been developed for Kosrae to implement as a means of increasing the resilience of Kosrae's communities and associated infrastructure to the impacts of coastal-related hazards and exacerbating effects of climate change:

Based on these principals eight key strategies have been developed for Kosrae to implement as a means of increasing the resilience of Kosrae's communities and associated infrastructure to the impacts of coastal-related hazards and exacerbating effects of climate change:

Strategy 1: Continued development and strengthening of community awareness including outreach activities with a focus on effective natural coastal defence and Kosrae-relevant climate change impacts and adaptation options.

Strategy 2: Amendment of the KIRMA Regulations for Development Projects to incorporate climate change considerations and strengthening of regulation implementation to support successful long-term risk reduction and adaptation.

Strategy 3: Over the next one to two generations the primary coastal road network and associated infrastructure currently located on the beach/storm berm is developed inland away from long-term erosion and coastal inundation risk.

Strategy 4: Ensure new development (property, infrastructure) is located away from areas at risk from present and future coastal hazards or is designed with coastal hazards in mind.

Strategy 5: Implement a program to encourage existing residential property owners to reposition homes away from areas of high risk from present and future hazards. This may be a staged approach over time as homes are routinely replaced or

renovated. Objective prioritization of properties most at risk should also be explored.

Strategy 6: Incorporate a grant component in to the housing loan program to help encourage new property to be constructed in areas not exposed to coastal, river floor or landslide hazards.


Strategy 7: Commence community and state discussions to develop a relocation strategy and identify potential approaches to support relocation from areas exposed to coastal hazards where no alternative land is available.

Strategy 8: A strategic approach is adopted for the ongoing provision of coastal defences. These should be considered only where:

- it is a sustainable long-term option, or
- where it is accepted as a transitional approach to protecting areas over the short to medium term to enable relocation strategies to be implemented.

By the 2050s (2 generations time) Kosrae needs to have made significant progress in implementing an adaptation strategy that repositions the majority of existing critical infrastructure and property away from the beach/storm berm areas, reclaimed areas of mangrove and low-lying wetland swamp to slightly higher ground around the base of the volcanic part of the island.

Without such a change in development direction, Kosrae will find it ever more difficult and expensive to protect and maintain infrastructure and property in the present coastal zone. Given limited resources it is important to invest now to reduce vulnerability and avoid the far more significant impacts of climate change that will occur over the latter half of this century and beyond. If action is delayed it will become increasingly difficult or impossible for Kosrae authorities and community to respond appropriately.

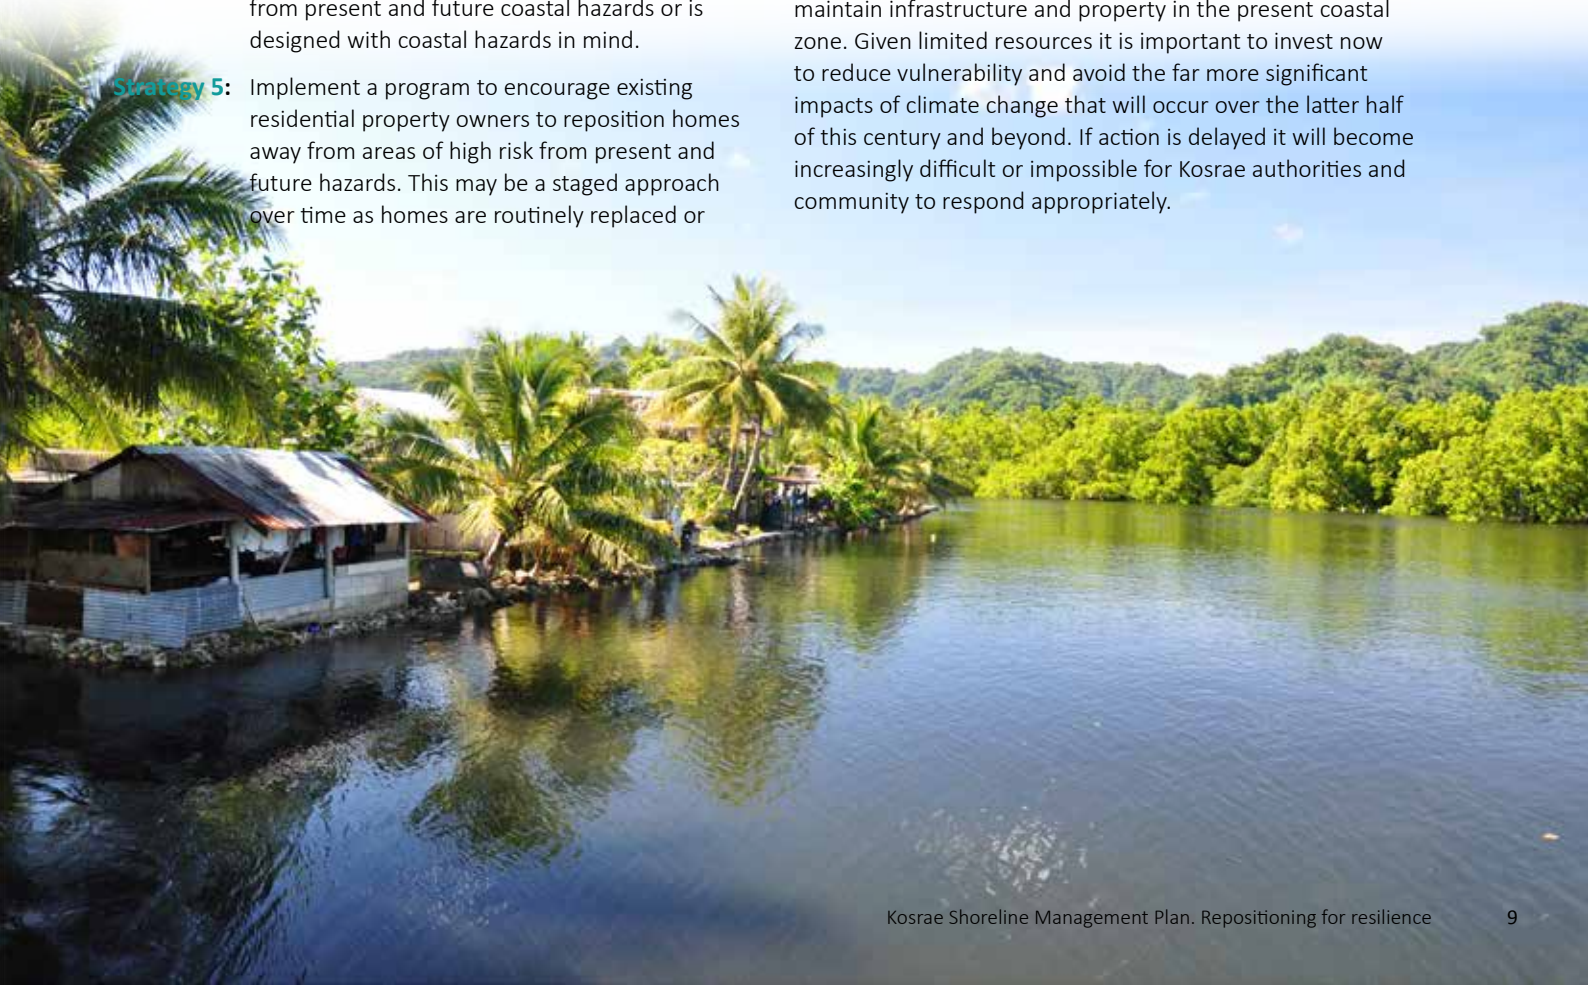



1 Introduction

1.1 Background

Much community and infrastructure development on Kosrae over the last 60 years has occurred within the coastal margins. Most of the coastline on Kosrae, where this development has occurred, is prone to coastal hazards such as long-term shoreline change and episodic coastal inundation (particularly during times of high (king) tides, large swell and very occasionally due to typhoon events).

The effects of ongoing and future climate change and sea-level rise will increasingly exacerbate the impact that these coastal hazards have on infrastructure, the five village communities and residential homes. Climate change stress will also potentially adversely impact on natural protective functions provided by reef systems, seagrass beds, mangrove strands, wetland areas and the coastal berm.

In 2000, the Development Review Commission (now Kosrae Island Resource Management Authority) developed a Shoreline Management Plan (DRC, 2000) which set out to:

- Inform and aid planning for future development by identifying areas of present and future coastal erosion and

inundation.

- Identify opportunities for maintaining and enhancing natural coastal protection and function.
- Assess a range of strategic coastal management options, in terms of limiting the future impacts of coastal erosion, flooding and storm damage to communities and infrastructure.
- Establish necessary monitoring and data collection systems to develop a better understanding of natural coastal processes on Kosrae, and thus better understand the potential impacts and future risks posed by climate change.

The strategy summarised a range of short and long-term recommendations to assist in reducing coastal hazard risks to the natural environment, communities and infrastructure. Many of the recommendations are still valid, and this revision of the Shoreline Management Plan builds on these recommendations and provides important additions and updates as follows:

- Account for more recent data, information and development/infrastructure changes.
- Increase focus on long-term adaptive management



Figure 1: Map showing locations of municipal boundaries, roads, villages and place names on Kosrae.

Introduction

planning and prioritisation for critical infrastructure over the next one to two generations.

- Guide and support future municipal, community and individual development decision-making.
- Implementation of village/municipal-level integrated adaptation activities.

1.2 Building resilient coastal communities on Kosrae

1.2.1 Past development pathway

Infrastructure, land and property of Kosrae is currently impacted by coastal flooding and erosion largely due to

development and planning choices that have occurred since the end of the Second World War. The pattern of development (Figure 2 and Figure 3) that has occurred over the past 2 to 3 generations has resulted in the majority of property and infrastructure been built on:

- Land that is low-lying and prone to coastal flooding.
- Reclaimed areas in mangrove or swamp areas, or over reef flat sand deposits (in the case of Utwe and Lelu villages).
- Land that is too close to the shoreline to accommodate both natural and human-induced shoreline change. Much has occurred on the narrow storm or beach berm that separates the fringing reef from the low-lying mangrove or brackish swamp areas (Figure 3).

The combination of the natural susceptibility of Kosrae's coastline to coastal change and inundation, increasing post



Figure 2: Development between 1944 and 2012 in Malem. Much of the development has taken place on the narrow storm berm between the shoreline and the low-lying wetlands.

World war II population and movement of communities in to these coastal areas, and changing community aspirations (electricity supply, telephones, paved roads, permanent buildings) have all led to greatly increased vulnerability of the Kosrae community (Figure 4). Other associated impacts include:

- Removal of sand and coral rubble from the reef flat (particularly along the eastern coast between Finaunpes and Mosral).
- Beach mining (removal of sand, gravel and cobbles) from the beach primarily for construction aggregates.
- Dredging of the reef flat in front of Tafunsak village.
- Altering the position of stream outlets or changing swamp drainage patterns and flows.
- Building inappropriate seawalls and land reclamation that has exacerbated erosion elsewhere or resulted in further development in high risk areas.

1.2.2 A different pathway for the future

The consequences of climate change and sea-level rise will not create any new hazards on Kosrae. Rather they will enhance existing coastal hazard issues. Over the next one to two generations, and beyond, climate change will progressively increase the frequency and impacts of coastal hazards such as erosion, wave overwash and flooding damage to existing property, infrastructure and communities on Kosrae. Increasingly it will make the situation too difficult for those currently located in exposed areas.

Considering actions to reduce the present risks to communities and infrastructure on Kosrae is a vital first step. We already understand that existing natural weather events, climate and sea-level variability can cause change and damage in Kosrae's coastal zone. Addressing these known issues of exposure is an effective way to start to reduce the coastal hazard impacts posed by future climate change.

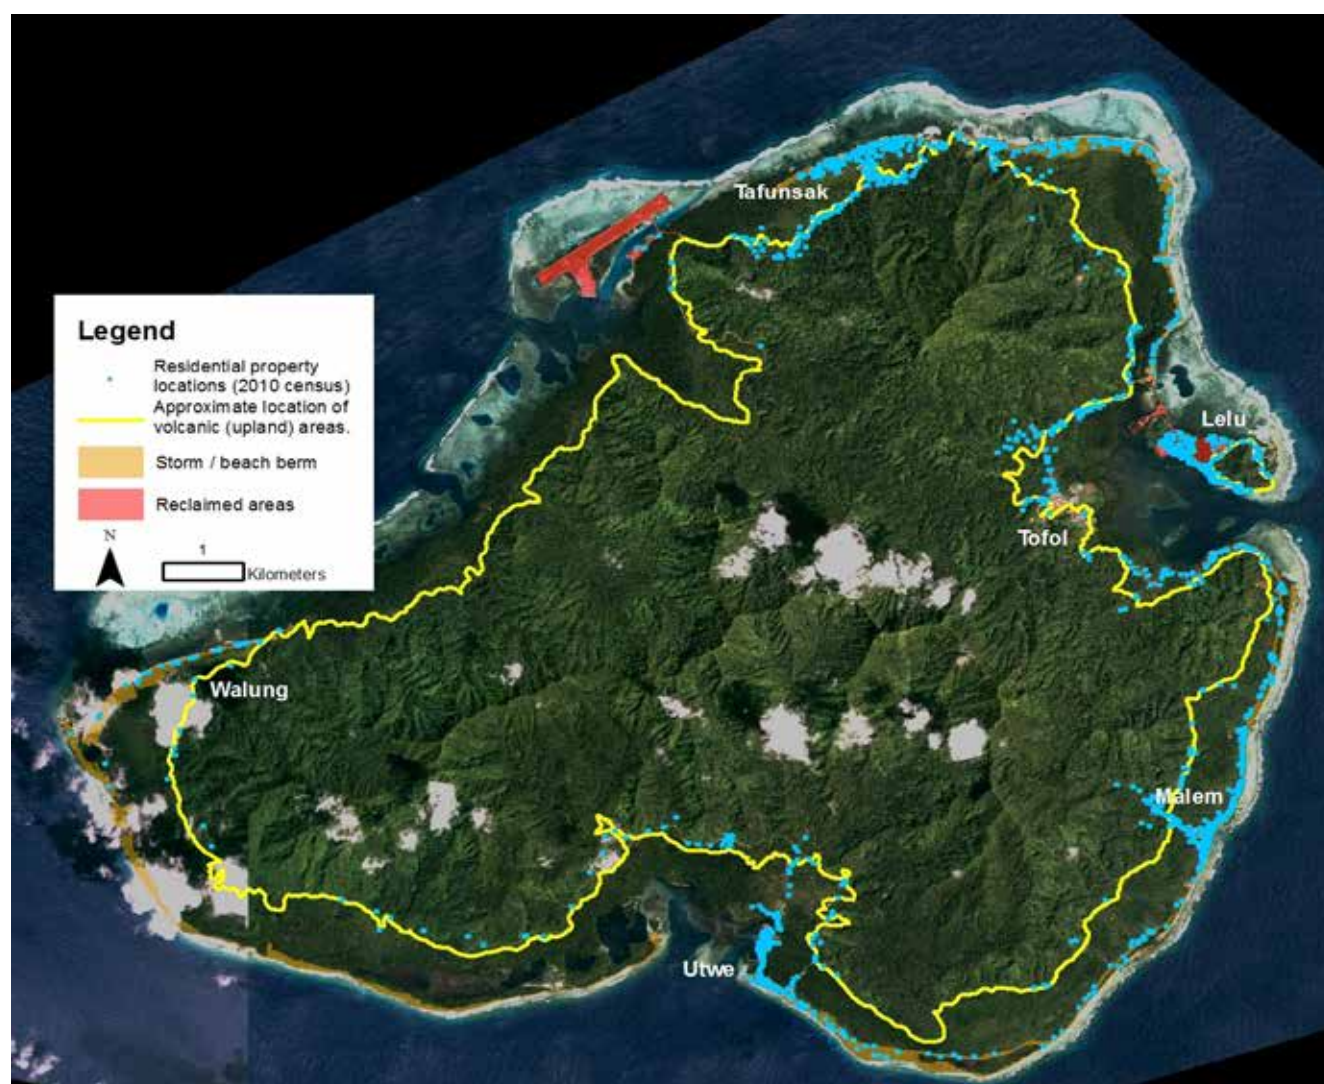


Figure 3: Location of residential development. Based on data from the 2010 census.

Introduction

However, beyond the next one to two generations communities on Kosrae will need to adapt beyond the current range in variability and extremes. Adapting to these future impacts needs to start now and will require a different approach to development on Kosrae than has been practiced over the last 2 to 3 generations. Fundamental this will mean a much greater emphasis on preventative measures that remove exposure to the hazard, rather than a primary focus on impact reduction (e.g., through for example continuing to build seawalls).

The approaches to achieve effective adaptation will build on existing coastal management approaches in Kosrae and can be

used in an effective policy for reducing current coastal hazard-related risks and achieving safe and resilient development.

There is no one “solution” to solving all the coastal hazard issues that Kosrae faces now and in the future. Successful adaptation will involve a “mix” of inter-related activities, the composition of which will vary both from location to location on Kosrae and over time.

The following principles are key for successful adaptation and reduction of present and future coastal hazard risks to Kosrae communities and infrastructure over the next few generations.



Figure 4: Examples of human impacts that have caused or exacerbated the potential for coastal erosion and inundation impacts on Kosrae. Top left: removal of coral rubble from the reef flat; Top right: Sand mining; Middle left: Dredge pits on the inner reef flat at Tafunsak; Middle right: Erosion at Walung caused by the cutting of a drainage channel at Leap; Bottom left: Erosion at the Sandy Beach Hotel caused by the seawall; Bottom right: Erosion and coastal change at Finkoia caused by the reclamation at the old Pheonix Resort and recent house construction.

1. The continued careful management of Kosrae's natural environment and resources is fundamental for effective and sustained protection from coastal hazards and long term adaptation:

- Recognising that the coastal ecosystem on Kosrae is the most effective coastal defence protecting the island from the effects of coastal hazards.
- Understanding that the enormous value of this natural protection is dependent on the health and the natural interactions between the various ecosystems including the watershed, wetlands and swamp forests, mangroves, coastal berm and beach, reef flat and seagrass, and surrounding fringing coral reef.
- Limiting negative human impacts on natural protective features is essential to Kosrae's efforts to address both climate change and existing coastal hazards.

2. A primary focus on where to build:

- Ensuring new development (property, infrastructure) is located away from areas at risk from present and future coastal hazards.
- Over the next one to two generations a sustained programme of encouraging existing development and infrastructure to be relocated away from areas at risk from present and future hazards as it is replaced or renovated.
- Strengthening investment criteria and the Development Review Permit process to limit new development in areas at risk from present and future coastal hazards.
- Developing incentive mechanisms to encourage development/redevelopment away from areas at risk from present and future coastal hazards.

3. A focus also on how to build:

- Ensuring that new infrastructure and buildings are designed to withstand weather and climate extremes including the future effects of climate change (climate proofing) over the proposed design life of the structure.
- Incorporating appropriate climate-proofing guidance in to existing policy and legislation.

4. Recognising that in most situations a reliance on impact reduction measures such as engineered coastal defences are not a

long-term option for achieving resilient infrastructure and communities on Kosrae:

- Given the levels of sea-level rise likely to be experienced in the latter part of this century, seawalls will not be capable of dealing with the types of coastal change and flooding that will occur.
- Over the foreseeable future, Kosrae will need to ensure that substantial financial commitment is made to ensure that existing coastal defences are maintained and upgraded to provide a sufficient standard of protection and to enable longer-term more sustainable risk-reduction initiatives to be implemented.
- Coastal defences built to protect communities often result in an increased sense of security and ongoing intensification of development with the problem becoming ever more complex.

5. Effective adaptation needs to start now:

- Starts with effectively addressing existing coastal hazard problems and issues to present communities, villages and infrastructure and builds on the many good examples of risk-reduction activities already occurring on Kosrae.
- Proactively plan and implement change to reduce exposure and vulnerability rather than waiting for damaging events to happen and then reacting.
- Adopts an adaptive management approach focusing on change on Kosrae over the next one and two generations to:
 - Address current and immediate future coastal hazard issues.
 - Position Kosrae to effectively cope with the much more significant coastal hazard impacts that will occur beyond this time over the latter part of this century and beyond.
- Take advantage of international adaptation financial support available now and recognise that such opportunities may not be as accessible into the future as the effects of climate change increase for all nations.
- Adopts whole of community approach where the population at large must assume responsibility for such change. Adapting to climate change requires changes in the way all sectors behave and for adaptation to be effective there needs to be functional partnership between all (community, Municipality, State and National Governments).

1.3 Shoreline management progress since 2000

Many of these principles lay behind the development of the first version of the Shoreline Management Plan in 2000. Since the plan was produced, a number of activities have progressed that are contributing to the reduction of the impacts of coastal hazards have on the community and infrastructure of Kosrae. These efforts have also improved understanding of coastal hazards and enabled better incorporation of practical risk management in decision-making and development-related legislation. A review of progress against the various recommendations made in 2000 is summarised in Appendix A with some key areas of progress outlined below:

- The continued emphasis on educational activities within both the Kosrae Island Resource Management Authority (KIRMA) and Kosrae Conservation and Safety Organisation (KCOS) that is focussing on both catchment and coastal-related aspects.
- An increasing number of residential properties being built

inland and increased awareness about the need to move back from the shoreline.

- Incidences of housing loan applications being refused where dwellings are proposed in areas at risk from shoreline change or inundation.
- Construction/upgrading of a number of seawalls identified as being required in the Shoreline Management Plan.
- Installation of an automatic sea-level gauge within Lelu Harbour (since November 2011) and a temporary gauge at Okat Dock (which will be left in place for one year and then moved to Walung and then to Utwe). This allows sea-levels to be accurately related to land levels.
- Greater consideration of climate change and climate change impacts and climate change adaptation strategies in to infrastructure projects within the Kosrae State Code and in Kosrae Island Resource Management Authority Regulations for Development Projects (currently under review).
- Continuation of beach profile recording since 1995 to accurately monitor ongoing shoreline change at key locations around the Kosrae coast.




Figure 5: Recent examples of poor development activities that will lead to further coastal hazard-related problems and are not sustainable or effective in the long-term. Top left: Low-lying reclamation for a new laundromat at Tafuyat, Lelu Harbour; Top right: Concrete bag seawall to protect the road at Mosral, Malem; Bottom left: Dumped concrete rubble to attempt to protect the road at Pal, Malem; Bottom right: Access road construction through the mangrove and along the foreshore at Leap, Walung.

However, there are also developments and activities which are of concern and not in keeping with sound coastal hazard risk management. In the longer term these may lead to maladaptation and greater risk to development on Kosrae. These include:

- Continued reclamation of mangrove and shoreline areas, for development. In many cases fill levels are too low and are already subject to flooding during normal high (king) tide sea levels.
- Recent, use of “low cost” coastal protection solutions in response to urgent need to protect sections of the paved road. This includes dumped concrete rubble at Finfoke in Tafunsak and Pal in Malem, large concrete filled bags at Mosral in Malem, and a previous proposal to use old bitumen drums, left from the re-sealing of the airport runway, filled with concrete for seawall construction.
- Proposed external support for shore protection activities without considering such activities within a wider strategic and sustainable approach to coastal hazard risk reduction.
- The extension of the road across the wetland/mangrove area and along the shoreline at Leap in Walung (with the intention to continue the reclamation and road development to the church at Insiarf), rather than continuing it around the edge of the volcanic part of the island.



2 Current and foreseeable coastal hazard issues

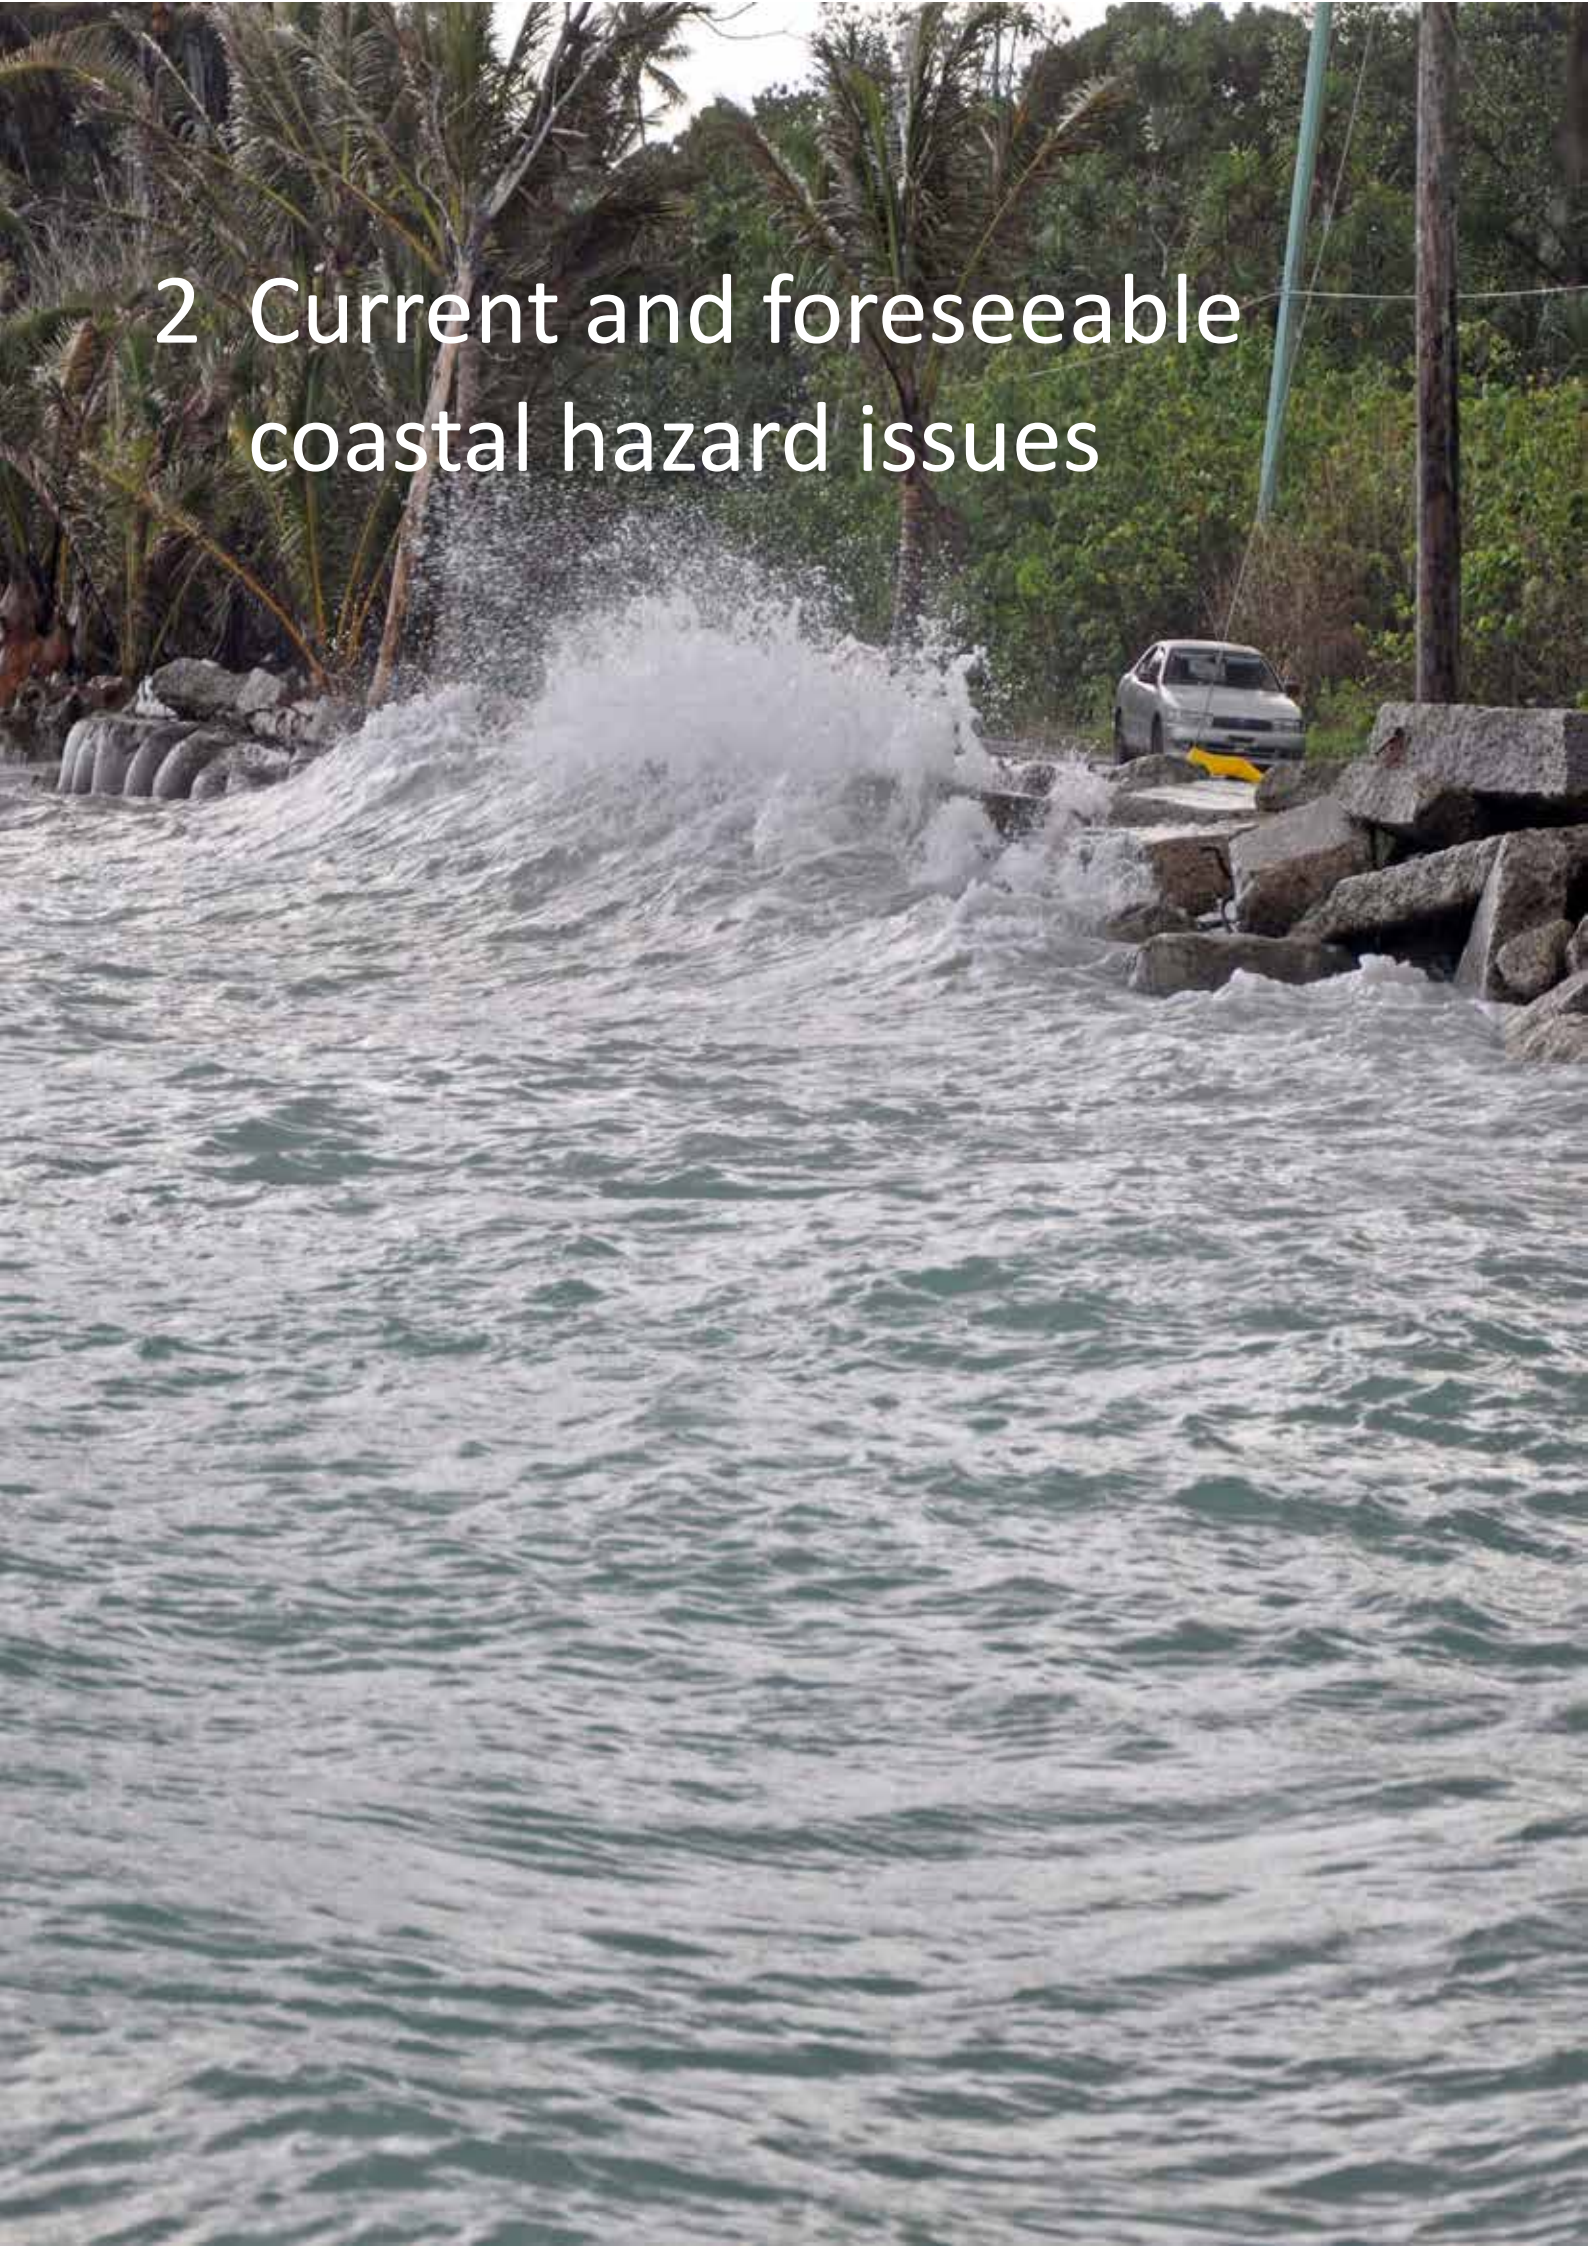

2.1 Shoreline change

Over the last century changes in the position of the shoreline around Kosrae shows considerable variability. Some sections such as along the eastern Malem coastline and at Finfokoa in Lelu has resulted in large shifts in the shoreline position, other sections have been relatively stable. A summary of the key processes driving coastal change and flooding on Kosrae are summarised in Appendix B and potential climate change and sea-level rise in Appendix D. Where changes have occurred these are due to both natural long-term processes and the effects of human activities on Kosrae’s shoreline and reef flat (Section 1.2.1).

The most significant long-term coastal retreat over much of the last century has occurred along the eastern facing Lelu and Malem coastlines. To understand why these coastal changes are occurring, it is necessary to look back to the end of the 19th century. Kosrae is rarely affected by cyclone events, with the main tracks located to the north and west of the island. The last major cyclone was in 1905 but it was a cyclone in 1891 that resulted in a bank of coral rubble being deposited on to the reef flat along much of the eastern coastline. In places it was so high that the breaking waves could not be seen (Buck, 2005).

This bank of coral rubble (Figure 6) acted as a breakwater blocking a substantial amount of the incident wave energy that would have normally reached the shoreline. This sheltered environment in the lee of the rubble rampart enabled the shoreline to gradually build out and fringing reef mangrove strands to develop at the mouths of streams along the Malem coast over much of the early to mid-part of the last century.

Over the subsequent decades these rubble banks gradually broke down but continued to provide a substantial level of protection to the eastern shoreline. However, it was in the

decades after World War II when considerable development commenced, including the circumferential road and the widening of a causeway to Lelu. These projects utilised large amounts of coral rubble sourced from these banks.

The removal of such a large amount of rubble from the banks both accelerated the breakdown and shoreward migration of the remaining coral rubble but also substantially reduced the protection provided to the shoreline. The increase in wave energy reaching the shoreline has subsequently resulted in a loss of the fringing mangroves and long-term and on-going readjustment of the shoreline along much of the eastern coastline with much higher rates of erosion than has been occurring on any of the other shorelines around Kosrae.

Many of these natural processes are to be expected and are ongoing and likewise the impacts of past human activities in the coastal zone still have an influence on patterns of shoreline change and adjustment. Such changes are indicative of the likely changes that will continue to occur over the foreseeable future (Figure 7).

The following areas are considered to be where coastal change-related impacts are likely to be most significant, either due to ongoing movement of the shoreline and/or the proximity of key infrastructure to the shoreline:

- **Lelu: Finfokoa and Pukushruk** – Large changes have occurred in the shoreline position at Finfokoa over the last half century and continued changes in shoreline position must be expected. However, it is expected the rate of change may be less in comparison with past change. Continued retreat of the coastline along the central section at Pukushruk will likely increase the exposure of the road to damage over time. Similarly the proximity of the road to the shoreline at Putukte suggests it will be susceptible to damage during large waves and high tides.



Figure 6: Aerial photograph of the north-east Kosrae coast in 1944 (left) and the remnants of the rubble ridge in 2013 at Putukte (right). The rubble ridge extending from Finaunpes all the way down the Pukushruk shoreline to Putukte can be clearly seen in 1944. The size of the ridge between Finaunpes and Finfokoa resulted in a build out of the shoreline in a bulge in the lee of the ridge. With the breakdown/removal of the rubble ridge, the sediment in this bulge in the shoreline has been redistributed along the adjacent coastline.

Current and foreseeable coastal hazard issues

- Malem** – The length of road exposed at Pal and Mosral will continue to increase (to the south) with damage from erosion and wave overwashing.
 - At Mosral if the concrete (tideflex) outlet continues to deteriorate reducing its effectiveness as a “groyne”, the coastline to the north of the Mosral River could retreat more rapidly.
 - A pattern of ongoing slow shoreline retreat is likely along much of the Malem coast, particularly at Yeseng, Kuplu and from Yewak to Tenwak.
 - At Yewak/Pilyuul, where the Pilyuul River would have originally discharged before being deflected north, there is a risk that ongoing retreat will increasingly expose the road to damage.
- Utwe** – The Impuspusa coastline is relatively stable but does experience episodic storm damage which over time may increase the potential for damage to the road where it runs close to the current shoreline.
- Tafunsak** – The position of the shoreline at Finfoko is relatively stable but the proximity of the road to the shoreline means it is susceptible to storm-related damage. At the western end of the seawall at Tafunsak, a slow rate of downdrift erosion has been occurring, and will continue, which is now beginning to undermine the road. At Wiya, the shoreline has moved little in the past but again the location of the road makes it susceptible to storm damage and erosion.
- Walung** – Between Insiat and Leap the shoreline has retreated primarily due to long-term sand mining activities and the cutting of a drainage channel through the beach berm in 1976 (and recently blocked up by the construction of the new seawall). A slow rate of retreat is likely to continue to both the east and west of the new seawall.

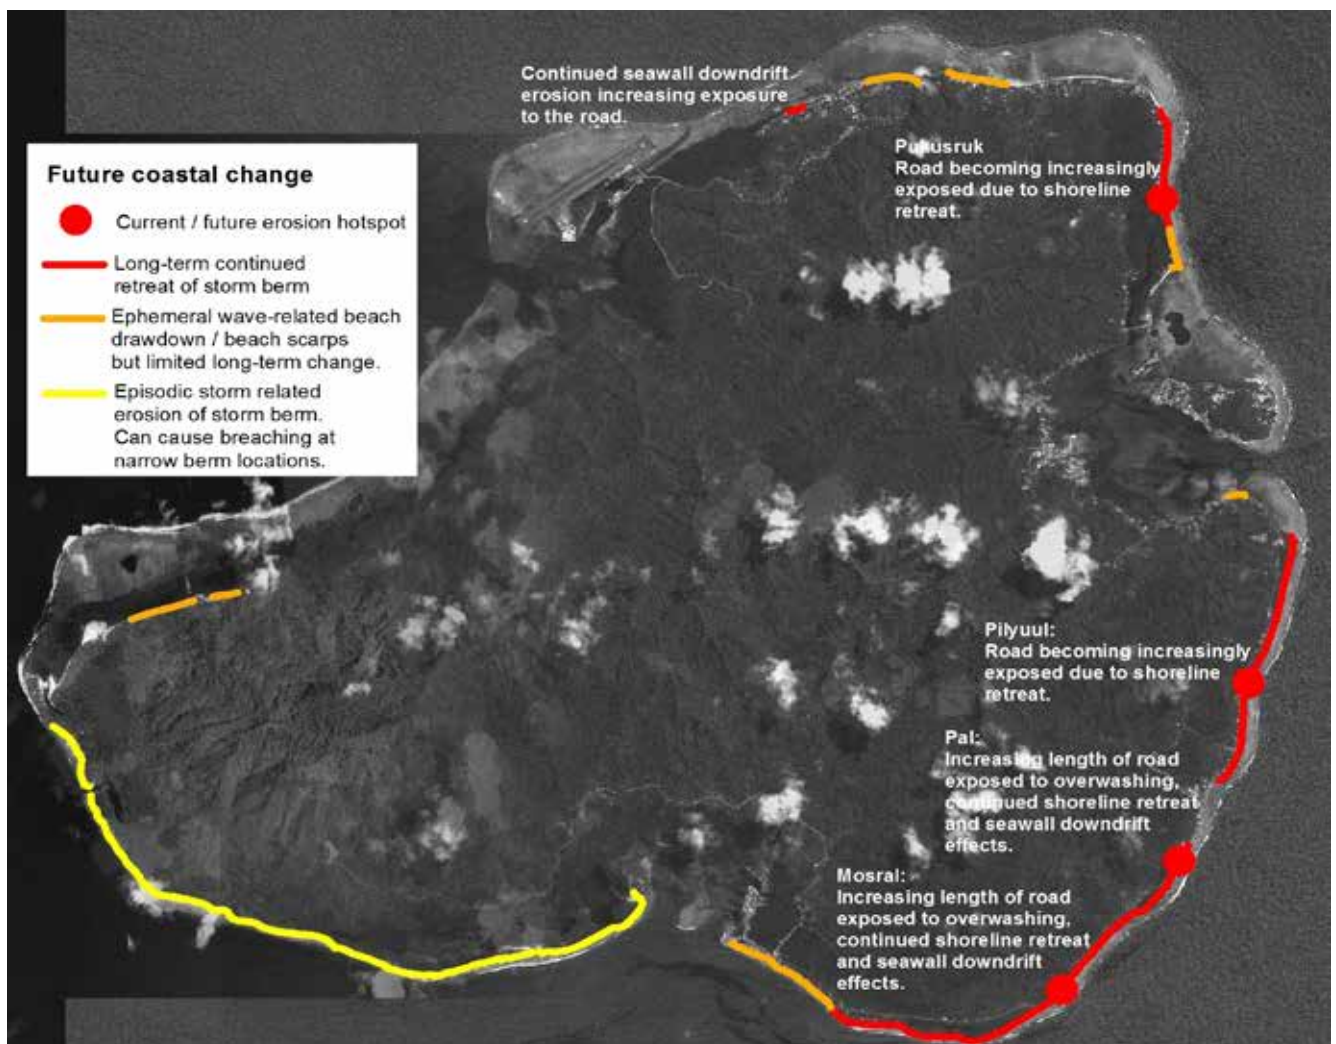


Figure 7: Summary of key locations and types of coastal change likely to be experienced on Kosrae over the next one to two generations.

2.2 Coastal inundation

Flooding of land from the sea tends to occur episodically due to three types of events: large swell events, typhoon events and high tide flooding.

Large swell events (such as affected the Tafunsak coastline in December 2008) and cyclone events (Figure 8)) are extremely destructive when they do occur, but are relatively infrequent events. There is always a chance that such events will occur but their frequency of occurrence is not likely to change noticeably due to climate change, at least over the next few generations.

Flooding caused by high tides, either due to high tides alone or when waves coincide with high tide conditions are most likely to cause significant impacts on Kosrae's communities (Figure 9). Where high tide flooding occurs at present, sea level rise will result in the frequency of such flooding events increasing. For example within one generation present-day high tide flooding will occur over four times more frequently than it does today, and within two generations about 10 times more frequently (see Appendix D).



Figure 9: Low-lying reclaimed areas on Lelu Island (top) and Utwe village (bottom). Both Lelu and Utwe villages have been built on reclaimed land that is close to present day high spring tide levels. The frequency and severity of high-tide flooding will be an ever-increasing issue as sea-level rise continues. Constructing further seawalls will not prevent more frequently and severe inundation occurring in the future.



Figure 8: Overwashing of the road in South Malem during Tropical Storm 31W in December 2001 (top) and at Tafunsak during the December 2008 large swell event (bottom).

The main locations (Figure 10) where high tide levels cause inundation problems to property or infrastructure tends to be where land has been reclaimed in the harbour or mangrove areas:

- **Lelu Island** – Much of the reclaimed areas on Lelu Island have land levels that are barely above present day high tide levels. Flooding of land during December and January commonly occurs adjacent to the canal sections in Lelu.
- **Pukusruk** – Landward of the road, many properties are built on reclaimed land in to the mangrove areas with levels barely above spring high tides.
- **Utwe village** – Much of Utwe village lies on reclaimed land on top of a sand spit. Again the level of the land is barely above present day spring high tide levels.
- **Walung** – The section of coast between Insiat and Pilyuul (old elementary school) is largely sheltered from waves but the level of the coastal berm is barely above high tide levels.

Current and foreseeable coastal hazard issues

- **Tafunsak** – The communities at Malsu, Yekula, Finfukul and Sialat that are located on land that is lower than the crest of the beach berm / coastal road. Overwashing of the seawall at Finfukul on to the road also already occurs. There can be no doubt that flooding will increase in these vulnerable locations. However, in the longer term, the potential rate of sea-level rise toward the second half of this century

will result in increasingly more frequent damage to much of the infrastructure and property located along all parts of the coastal storm/beach berm and reclaimed areas (Figure 3). It will be increasingly difficult to maintain infrastructure and residential property located in these areas without substantial and continuous investment (for example raising reclaimed land levels in Lelu and Utwe villages).



Figure 10: Summary of key locations where coastal inundation issues will increase on Kosrae over the next one to two generations.

3 Adaptation foundations

The careful management of the natural coastal environment



Adaptation foundations

The foundations for effective adaptation is built on the careful management of the natural coastal environment, and the resources found there. This is the single most important coastal protection activity on Kosrae and one that is fundamental for minimising the potential impacts of present and future coastal hazard impacts.

A healthy coastal environment on Kosrae is the most effective coastal defence available. This natural coastal defence includes the watersheds, wetlands and swamp forests, mangroves, beaches, reef flat, and the coral reef (Figure 11 and Table 1). The effectiveness of this natural coastal defence, and its

resilience to the effects of climate change and sea-level rise, is dependent upon the health of, and the natural interactions between, each of these environments.

Limiting detrimental human impacts on the functioning of this natural protection is essential to Kosrae's efforts to address both climate change and existing coastal hazards. The mechanisms for supporting this are well developed and mainstreamed in Kosrae through the community awareness activities of both KIRMA and Kosrae Conservation and Safety Organisation (KCOS) and the development review process.



Figure 11: The best coastal defence on Kosrae. Awareness poster developed in 1999 by the Development Review Commission (now KIRMA).

Table 1: Coast protection functions of Kosrae's natural environment and key impacts on this coast protection function.

| Environmental feature | Key coastal protection functions | Key activities on Kosrae that impact on the coastal protection function of the natural environment |
|---|---|---|
| Coral reef, reef flat and seagrass | <ul style="list-style-type: none"> • Direct protection from waves. • Source of sediment, (coral rubble, skeletal remains of reef biota), that feeds Kosrae's beaches. • The primary factor controlling wave energy reaching the shoreline and influencing how beach and shoreline mangrove areas change. | <ul style="list-style-type: none"> • Detrimental fishing practices (chlorox, poison leaf). • Overfishing of herbaceous reef fish. • Excessive pollution from pig pens and septic tanks located too close to the coast or streams. • Pollution or excessive sedimentation from commercial activities or dredging. • Land practices increasing freshwater and sediment discharge. • Removal of reef flat sand and coral rubble. |
| Beach and backshore | <ul style="list-style-type: none"> • Natural adaptable buffer providing direct protection to land behind from waves and coastal flooding. | <ul style="list-style-type: none"> • Sand mining and removal or reef flat coral rubble. • Vegetation removal from behind the beach. • Development that is too close to the shoreline (encroachment within the backshore buffer zone). • Land reclamation or seawalls that impact on the natural beach processes. |
| Mangroves | <ul style="list-style-type: none"> • Direct protection from waves (reef flat and harbour areas). • Trapping sediments and nutrients washed off the land before it reaches seagrass and coral reef environments. | <ul style="list-style-type: none"> • Harvesting large areas of seaward fringe mangroves. • Land activities that result in pollution, increased river flows or sediment input. • Land filling, roads through, or reclaiming mangroves areas. |
| Wetland areas and rivers | <ul style="list-style-type: none"> • Controls flow of fresh water from land to reef environments during periods of heavy rain. • Trapping sediments and nutrients washed off the land before it reaches the seagrass and coral reef environments. | <ul style="list-style-type: none"> • Drainage of wetlands. • Alterations to natural drainage pathways through wetlands (e.g., due to farm roads, insufficient culverts). • Alterations to river or stream outlets at the coast. • Land filling or reclaiming large areas of wetland. |
| Catchment watersheds | <ul style="list-style-type: none"> • Regulates flow of rainfall and sediment run-off to wetland and coastal areas. | <ul style="list-style-type: none"> • Clearing of steep sloping land or land too close to rivers and streams. • Development of land above the Japanese line. • Construction of roads with steep slopes. |

Adaptation foundations

Strategy 1: Continued development and strengthening of the community awareness and outreach activities with a focus on an effective natural coastal defence and Kosrae-relevant climate change impacts and adaptation options.

Continuing the community awareness and outreach activities conducted by KIRMA and KCOS is critical if Kosrae's communities are to reduce the ongoing impacts of coastal hazards on their communities and respond effectively to the longer-term exacerbating impacts of climate change and sea-level rise. Many of the current coastal hazard-related issues are in a significant part due to past, and in some cases ongoing, human-related activities that have impacted on the effectiveness of the natural coastal protection provided by the coastal system on Kosrae.

Future awareness and outreach activities should continue to focus on reducing and minimising human impacts on the effectiveness and protection provided by the natural coastal defences:

- Impacts of sand mining and coral rubble removal.
- Importance of naturally vegetated buffer zones between the shoreline/edge of mangroves/rivers and streams and land development.
- Avoiding developing areas prone to current or future coastal hazards over the lifetime of the development. Key messages should incorporate recommendations to avoid any further development:
 - seaward of the paved section of road between Okat and Utwe
 - within 50 feet (15 m) of the shore or mangrove vegetation line or top of seawall structures (including no further land reclamation over mangrove or beach areas)
 - located on land less than 4 m (4 m contour) above land vertical datum on Kosrae (this is approximately 6 feet (2 m) above the present day high water mark) or in mangrove areas.
- Continued focus on protecting the natural functions of river and stream catchments and limiting development above the Japanese Line.
- Limitations of sea walls and other coastal defences as a long-term effective adaptation option.

An integral component of this awareness/outreach activity will be to continue to strengthen the relationship with the Housing and Renovation Division of the Department of Resources and Economic Development.

Strategy 2: Amendment of the KIRMA Regulations for Development Projects to incorporate climate change considerations and strengthening of regulation implementation to support successful long-term risk reduction and adaptation.

The KIRMA *Regulations for Development Projects* are currently being amended to require the design and implementation of public infrastructure such as road and building to incorporate climate change adaptation measures consistent with the FSM National Climate Change Policy of 2009.

Further changes have been suggested to strengthen the consideration of the effects of natural change, impacts of extreme weather and climate events, and climate change on a proposed development activity and to better incorporate risk-reduction and adaptation considerations in to the development permitting process.

In strengthening the implementation of the development permit process to contribute to sustained adaptation and reduction of present and future coastal hazard risks to Kosrae communities it is recommended that development projects in the following locations be prohibited and that any exceptions require full technical assessment of the risks in the following locations:

- seaward of the paved section of road between Okat and Utwe, or
- within 50 feet (15 m) of the shore or mangrove vegetation line or top of seawall structures (including no further land reclamation over mangrove or beach areas), or
- located on land less than 4 m (4 m contour) above land vertical datum on Kosrae (this is approximately 6 feet (2 m) above the present day high water mark) or in mangrove areas.

The area covered by the above development restrictions is shown in Figure 12.



Figure 12: Low-lying coastal areas where restrictions on further development are required. The areas shown in red are largely below the 4 m MSL contour which is approximately 2 m above present day high spring tide level.

4 Repositioning

An adaptation pathway for
development on Kosrae



4.1 Introduction

If Kosrae is to build communities resilient to the future effects of climate change, over the next one to two generations all new development (property, infrastructure) must be located away from the narrow coastal berm and low-lying areas. These areas are already vulnerable to shoreline change and inundation, and climate change will cause the frequency and severity of such impacts to ever increase.

Also of great importance will be a sustained effort to encourage existing development and infrastructure to be repositioned

away from areas at risk. Such repositioning does not need to happen immediately but rather it can be conducted in a structured way over time as buildings and infrastructure require replacement or significant upgraded or renovation.

By the 2050s (2 generations time) Kosrae needs to have made significant progress in implementing an adaptation strategy that repositions the majority of existing critical infrastructure and property away from the beach/storm berm areas, reclaimed areas of mangrove and low-lying wetland swamp to slightly higher ground around the base of the volcanic part of the island (Figure 13).



Figure 13: Potential primary and secondary sealed road network on Kosrae by the 2050s. Note: Parts of the secondary road network (current coastal road) may become impassable due to ongoing shoreline change and breaching.

4.2 Resilient infrastructure

4.2.1 Strategy overview

The coastal (paved) road network is a major piece of critical infrastructure on Kosrae providing the only connection between the main villages and to the airport and port.

Much of the coastal road is located on the narrow storm/beach berm between Tafunsak and Utwe. With the exception of the section around Tofol much of the roads is at risk from shoreline change and wave overwash. To date the response to the most critically at risk sections has been to build seawalls, typically rock revetments which provide varying degrees of protection. At present further sections at Pal and Mosral are critically threatened. In the foreseeable future, both ongoing coastal change and the exacerbating effects of sea-level rise and climate change, will result in further sections of road becoming increasingly exposed to damage and flooding (for example, at Yewak/Pilyuul and Pukusruk). Given the elevation of much of the existing coastal road relative to future sea levels and its location on the narrow beach/storm berm continued reliance on seawall protection of all sections of the present paved coastal road will become progressively less effective, more expensive and will not be a sustainable.

The road network plays a fundamental role in directing where other infrastructure (Kosrae Utility Authority and FSM Telecom) and residential development both historically and in the future occurs. For example, the majority of residential property developed over the last two to three generations is located alongside the main paved sections of road. Likewise the power distribution network (power lines and poles) runs north from Tofol to the airport and port at Okat, and to the south to Utwe and is located next to the road upon the narrow beach/storm berm. Airport and port operations in particular are extremely vulnerable should damage occur to any part of the power distribution system between Tofol and Okat (the back-up route between Mutunnenea and Sialat for part of the route is largely in place but with a small gap due to a lack of access agreement with one landowner).

Due to these interdependencies continuing to maintain the single main road between Tafunsak and Okat in its present location on the narrow beach/storm berm will leave the whole community vulnerable to being isolated and unable to move between locations/villages and make responding to emergencies and continued development very difficult if not impossible. Repositioning the road to higher ground ensures lower cost, all weather access for the whole community into the future.

Strategy 3: Over the next one to two generations the primary coastal road network and associated infrastructure currently located on the beach/storm berm is developed inland away from long-term erosion and coastal inundation risk.

The priority focus of road development activities on Kosrae urgently needs to change from any further extension/ completion of the circumferential road between Okat and Walung to addressing the current and potential vulnerabilities of the existing coastal road particularly between Utwe and Malem (where there is presently a real risk of a breach occurring of the road) and from Finpukal to Tafunsak.

Starting now, but implemented over the next 25 to 50 years, a phased approach to repositioning the main access road away from the shoreline to higher ground must be a priority. This is key to enhancing the resilience of the coast to the effects of future climate change, reducing and removing the risks to Kosrae's essential infrastructure, and to encouraging and enabling the relocation of residential properties and communities back from areas at risk from present and future coastal hazards.

The present-day practice (as seen in the development of the section between Utwe and Walung) of constructing the inland road around the perimeter of the lower slopes of the volcanic part of the island and above the freshwater swamp or mangrove areas provides a suitable long-term response as long as levels of new and upgraded inland roads are at least 6 feet (2 m) above present day high tide levels (above the 4 m contour). This would ensure:

- Road levels are above any future high tide levels for at least the next one hundred years.
- The majority of the road network is located well back from the shoreline and protected by the full extent of the natural coastal protection (reef, reef flat, beach and beach/storm berm, swamp and/or mangrove forest).

Furthermore with Kosrae's already high rainfall amounts and intensities, and with rainfall intensities likely to increase in the future due to climate change:

- Road slopes need to be minimised as far as possible.
- Minimize, construction activities that increase landslipping risk, e.g., cutting into the hillsides.
- Adequate culverts and bridges are installed, taking account of revised design rainfall amounts and drainage guidelines that have been developed to minimize changes to drainage patterns and to cope with periods of heavy rainfall.

In the development/upgrade of sections of inland road the following assumptions have been made:

- A 60 feet standard easement is assumed.
- An integrated infrastructure approach is adopted which includes relocation of power distribution, and any water or telecom service infrastructure. For this indicative costing it is assumed that new power lines will be installed along all new/upgraded sections of road.
- Existing sections of inland farm roads require widening to obtain a roadway width of 30 ft, require construction of roadway drainage structures and resurfacing to sub-base course level.
- Upgrade to Hot Mix Asphalt (HMA) pavement includes base course preparation on top of the sub-base and 2" thick asphalt pavement. It is assumed that all aggregates included sand are imported.
- Indicative costs from the Department of Transport and

Infrastructure and Kosrae Utility Authority are as follows:

- New road development to full width, all drainage infrastructure and to sub-base wearing course: US\$600k per mile (approximately \$373 per metre).
- Sub-standard road upgrade to full width, all drainage infrastructure and to sub-base wearing course: at least \$300k per mile (approximately \$186 per metre).
- Upgrade sub-base wearing course to Hot Mix Asphalt pavement: \$520k per mile (approximately \$323 per metre).
- Power line network: \$30k per mile (\$19 per metre).

In addition roads will cost somewhere in the order of 2–5% of the construction cost on an annualized basis to maintain at their as-constructed standard over their design life (Katie Friday, US Forestry Service, Pers Comm).

The prioritized redevelopment of the coastal road is summarized in Figure 14 and outlined below:



Figure 14: Priority section of the development of the inland road on Kosrae.

Repositioning

4.2.2 Priority section 1: Malem to Yeseng to Utwe

Upgrading the inland road between Malem and Utwe is considered the highest priority due to the risks posed due to wave overwashing and potential breaching of existing sections at Pal and Mosral. There is a very real present day risk that road access to Utwe could be cut off. The natural storm berm to the south of Malem also tends to be lower in elevation (than other areas such as north of Malem and the Pukusruk coast) resulting in the road being more prone to wave overwashing where it is exposed.

At Pal despite rock protection being extended south from Malem and further concrete rubble being dumped along the most exposed section. Adequate protection will require a significant investment to maintain this section or road in a serviceable condition in the short to medium term (see Section 3.2). At present there is a very real risk of the road being breached or damage to the power line, which is located to the seaward edge of the road. Over the next 25 years further sections of the road to the south of Pal will become progressively exposed as the shoreline continues to retreat back.

At Mosral the concrete bags that have been placed along the most exposed section to the south of the Mosral River outlet do not offer an adequate standard of protection and there remains a significant present-day risk of the road being damaged. There are already signs that this section of seawall is exacerbating the rate of retreat of the shoreline immediately to the south. Over the next 25 years further sections of road to the south of Mosral to where the road bends inland at Kuplu, will become progressively exposed as the shoreline continues to retreat back. The road may also become more exposed to the north as well if the tideflex outlet deteriorates further. At present the tideflex outlet acts as a groyne trapping gravel which is being moved southward along this section of coast.

Should a severe typhoon affect Kosrae during the next 25 years, it is likely that substantial sections of the road from Malem to the south of Pal, at Mosral, and from Hiroshi Point towards Utwe could experience substantial damage irrespective of whether coastal defences are in place or not, further highlighting the need to relocate the road inland to higher ground.

Indicative locations of new and upgraded inland road between Utwe and Malem are shown in Figure 15 with indicative costs in Table 2.

Table 2: Indicative costs in US\$ for inland road and associated infrastructure development between Utwe and Malem. Costs are shown for upgrading/developing the inland road to both sub-base wearing course and to hot mix asphalt pavement.

| Section | Upgrade existing road (m) | New road section (m) | Total to sub-base wearing course (\$) | Total to Hot Mix Asphalt Pavement (\$) | Power line upgrade/installation (\$) |
|---------------------------------------|---------------------------|----------------------|---------------------------------------|--|--------------------------------------|
| Inland road: Malem to Yeseng | | 2000 | \$746,000 | \$1,392,000 | \$38,000 |
| Access road: Malem | 870 | | \$163,000 | \$444,000 | \$16,300 |
| Access road: Yeseng | 500 | | \$94,000 | \$255,000 | \$9,400 |
| Inland road: Yeseng to Finsrem (Utwe) | 2520 | 2460 | \$1,387,000 | \$2,997,000 | \$92,900 |
| Access road: Utwe to Finsrem | 600 | | \$355,000 | \$969,000 | \$35,500 |
| Inland road: Finsrem to Finkol | 1900 | | \$112,000 | \$306,000 | \$11,200 |
| Access road: Utwe to Finkol | 1140 | | \$213,000 | \$581,000 | \$21,300 |
| TOTAL | 7530 | 4460 | \$3,070,000 | \$6,944,000 | \$224,600 |



Figure 15: Indicative inland road between Utwe and Malem showing the requirements of new and upgraded sections of road.

4.2.3 Priority section 2: Mutunnenea to Sialat

The section of coastal road between Mutunnenea and Wiya is a further major section of coastal road located on a narrow storm berm between Finpukal and Finaunpes, and on the northern coast a wider beach berm. Also located adjacent to the road is the only power and telephone line to Tafunsak and to the port and airport.

Currently the only section of road at critical risk to wave overwash and damage is at Finaunpes, which has been protected by a variety of seawalls culminating in the rock revetment installed in 1998. Between Finaunpes and Sialat the shoreline has generally been accreting over the last few decades. However, severe erosion was previously experienced from around 1998 at the Sandy Beach Hotel due to the seawall at Finaunpes. This has now been stabilised by a beach control breakwater and beach nourishment scheme undertaken in 2001). This section of coast has a wide natural buffer, although narrowing towards Sialat, with minimal development between the road and the shoreline. Unless there is a significant change in the sedimentary regime along this section of coast this natural buffer should continue to provide adequate protection to the road.

Between Finfokoa and Putukte the road is generally well back from the shoreline at the northern end with a narrower coastal buffer at the southern end. Whilst the shoreline appears to have moved little over the last few decades at Putukte, the

proximity of the road to the shoreline does put it at significant risk. However, it is north of the Mormon Church where over the next 25 years coastal retreat will progressively increase exposure and risk of damage to the road. Any coastal defences, unless very carefully designed, on the Pukusruk coast will exacerbate erosion on adjacent unprotected sections.

From Putukte to Finpukal, the storm berm (and road) is lower and, despite being sheltered from the largest of waves, overwashing of the existing road at high tides will become an increasing issue as sea levels rise, irrespective of whether further coastal defences are built.

Landward of the road from Finpukal to Finaunpes most property is located on reclaimed land within the mangroves with little elevation above high spring tide levels. Between Finaunpes and Sialat, property located on the low-lying land behind the beach berm is prone to occasional inundation when large swell events from the north overwash the berm (such as occurred in December 2008), or due to heavy rainfall and flooding from the various streams that drain to the coast. These areas will increasingly experience drainage issues, waterlogging and ponding of water due to increasing rainfall and higher sea levels.

The inland road between Mutunnenea and Sialat has been in place for many years (Figure 16). It was originally built as a single track and when maintained was passable in most vehicles. However, over the last few years the central section has had little maintenance, is now largely overgrown

Repositioning

Table 3: Indicative costs in US\$ for inland road and associated infrastructure development between Mutunnenea and Sialat. Costs are shown for upgrading/developing the inland road to both sub-base wearing course and to hot mix asphalt pavement.

| Section | Upgrade existing road (m) | New road section (m) | Total to sub-base wearing course (\$) | Total to Hot Mix Asphalt Pavement (\$) | Total Power line upgrade/installation (\$) |
|----------------------|---------------------------|----------------------|---------------------------------------|--|--|
| Mutunnenea to Sialat | 4500 | | \$839,000 | \$2,293,000 | \$83,900 |

and only passable with a large four-wheel drive. However, progressively it has encouraged an increasing number of residential properties to be located along it, particularly at the southern end. Upgrading the inland road will encourage further development inland away from the exposed storm/beach berm and low-lying areas between Finaunpes and Finpukal.

The alternative to upgrading the inland road between Mutunnenea and Sialat would be to develop the cross island road between Innem and Okat. This is the preferred option for

Kosrae Utility Authority to provide a secondary power line to Okat harbor and airport. However, the Mutunnenea to Sialat option was generally favoured by all others consulted. Power lines do extend up the existing inland road from both the Mutunnenea and Sialat ends but do not yet join due to local land ownership issues.

4.2.4 Priority section 3a: Sialat to Yekula/Wiya

Between Sialat to Wiya the road is located close to the shoreline. A number of streams discharge to the shoreline resulting in low-lying, inundation-prone land behind the beach berm. At present coastal inundation only tends to be an issue during episodic swell events (such as occurred in December 2008) or when high tides combine with northerly waves (the low lying areas behind the berm are also prone to flooding due to heavy rainfall events). From Yekula to Wiya the coastal margin is higher in elevation, less prone to overwashing, and relatively stable but it has only a narrow buffer between the shoreline and road.

The most exposed section between Sialat and Yekula, opposite the channel over the outer reef, was protected by a seawall in 1999. The wall was well constructed and succeeded in minimizing impacts on adjacent sections of the coast but had no crest protection resulting in the edge of the road remaining prone to damage due to wave overtopping. The potential for damage to the road along this protected section will increase over time unless some further crest protection is provided.



Figure 16: Inland road section between Mutunnenea and Sialat.

Table 4: Indicative costs in US\$ for inland road and associated infrastructure development between Sialat and Yekula. Costs are shown for upgrading/developing the inland road to both sub-base wearing course and to hot mix asphalt pavement.

| Section | Upgrade existing road (m) | New road section (m) | Total to sub-base wearing course (\$) | Total to Hot Mix Asphalt Pavement (\$) | Total Power line upgrade/installation (\$) |
|------------------|---------------------------|----------------------|---------------------------------------|--|--|
| Sialat to Yekula | 765 | 350 | \$274,000 | \$634,000 | \$21,000 |



Figure 17: Inland road section between Sialat and Yekula.

Repositioning

4.2.5 Priority section 3b: Malem to Pilyuul

The coastal road through Malem village to the north of the Malem River outlet is protected by a rock revetment and buffer of reclaimed land. The revetment has been poorly constructed in places and is overwashed during high tides. However, with the exception of typhoon events, the road is not presently at significant risk. To the north of Malem, through Yewak to south Pilyuul, the shoreline position is relatively stable but over the next one to two generations is likely to see a continual slow retreat with the road becoming progressively more exposed to coastal hazards (particularly around the section of coast opposite the shallow reef channel between Yewak and Pilyuul).

Between Malem and Pilyuul there is a relatively high density of residential properties located along the coastal road and upon the storm berm, either:

- Seaward of the road and hence at greater and increasing risk from erosion and wave damage, over the next 25 to 50 years.
- Landward of the road on slightly less wave exposed but lower lying flood prone land backing on to the saline/freshwater swamp areas behind the storm berm.

Around Pilyuul the buffer between the shoreline and road increases in width and despite a slow rate of ongoing shoreline retreat the road is less at risk over the foreseeable future.

As with developing the inland road between Mutunnenea and Sialat, upgrading the inland road between Malem and Pilyuul will encourage further development on higher ground away from the narrow storm berm. Whilst the storm berm upon which the road is located is not critically exposed at present, parts of the road will progressively become more exposed to damage over the next one to two generations. The timing for the upgrade of the inland road development will depend on the ongoing rate of retreat of the section of coast between Yewak and southern Pilyuul, particularly around the location of the historical outlet of the Pilyuul River. It is suggested that as soon

as the buffer between the shoreline vegetation line reduces to less than 30 feet (10 m), planning and implementation for the upgrade of the inland road should be prioritized.

As on other sections of the exposed Malem and Lelu coastline, any coastal defences such as seawalls will tend to cause downdrift erosion on adjacent shoreline sections to the south and are not recommended.



Figure 18: Inland road section between Malem and Pilyuul.

Table 5: Indicative costs in US\$ for inland road and associated infrastructure development between Malem and Pilyuul. Costs are shown for upgrading/developing the inland road to both sub-base wearing course and to hot mix asphalt pavement.

| Section | Upgrade existing road (m) | New road section (m) | Total to sub-base wearing course (\$) | Total to Hot Mix Asphalt Pavement (\$) | Total Power line upgrade/installation (\$) |
|--------------------------|---------------------------|----------------------|---------------------------------------|--|--|
| Inland: Malem to Pilyuul | 2500 | | \$467,000 | \$1,274,000 | \$46,700 |
| Access: Pilyuul | 430 | | \$81,000 | \$220,000 | \$8,100 |
| Access: Yewak | 760 | | \$142,000 | \$388,000 | \$14,200 |
| TOTAL | 3690 | | \$690,000 | \$1,882,000 | \$69,000 |

4.2.6 Priority section 4: Pilyuul to Tenwak

Between Pilyuul and Tenwak most of the coastal road is located on the storm berm. However, along this section there is a relatively wider buffer formed by a more recent storm ridge (likely created during the 1891 cyclone). This berm has not yet migrated back to join the more “permanent” storm berm. In between the Pilyuul River flows northwards to its outlet at Tenwak.

The need for upgrading this section of the road over the next one to two generations will depend on the pattern of shoreline retreat. If the storm ridge continues to retreat (and the Pilyuul River outlet breaches further south) then the need for repositioning of the road to the base of the volcanic part of the island may increase in priority. As with other road and coastal sections, ongoing monitoring is key to the continued fine tuning or priorities for road relocation.

Table 6: Indicative costs in US\$ for inland road and associated infrastructure development between Pilyuul and Tenwak. Costs are shown for upgrading/developing the inland road to both sub-base wearing course and to hot mix asphalt pavement.

| Section | Upgrade existing road (m) | New road section (m) | Total to sub-base wearing course (\$) | Total to Hot Mix Asphalt Pavement (\$) | Total Power line upgrade/installation (\$) |
|---------------------------|---------------------------|----------------------|---------------------------------------|--|--|
| Inland: Pilyuul to Tenwak | | 1510 | \$563,000 | \$1,051,000 | \$28,200 |
| Access: Tenwak | 150 | | \$28,000 | \$77,000 | \$2,800 |
| TOTAL | 150 | 1510 | \$591,000 | \$1,128,000 | \$31,000 |



Figure 19: Inland road section between Pilyuul and Tenwak.

Repositioning

4.2.7 Other road sections

Other sections of coastal road

There are a number of other sections of the coastal road where the steep volcanic topography extends to the shore. In these locations there is little potential to relocate the road further inland. These sections include:

- Tenwak to Mutunlik.
- Wiya to Malsu.
- Causeway and Lelu Island.

Protecting, or upgrading and continuing to protect these sections with coastal defences is the most likely option for the foreseeable future (Section 5). At Malsu the road and surrounding land is low-lying as it is the outlet of two streams. Both river flooding and overwashing during high tides and/or large swells will continue to be an issue. At this location however there appears limited option to relocate further inland and a more detailed investigation of options is required.

Mutunnenea to Mutunlik

Between Mutunnenea, through Tofol to Mutunlik the road is located well back from the harbor shoreline and unlikely to be significantly affected by sea-level rise or coastal change over the next few generations. Only between the outlet of the Tafuyat River and southern part of Mutunlik, where the road elevation is low is there a need for improved protection and potentially raising the road elevation to avoid inundation when this becomes a too frequently occurring issue.

Utwe to Walung

The section of road from Utwe to Walung is currently being upgraded with Chinese Government support. The alignment of the road around the edge of the lower section of the volcanic part of the island is a good example of a road that is well positioned to minimize the impacts of potential coastal hazards and the future effects of sea-level rise. However, extending the road along the coastline at Walung to Insiaf is not well advised and is not aligned to a long term strategy to reduce the risk of damage to infrastructure from coastal hazards.

Okat to Yela

This road is currently being upgraded and extended as part of the Pacific Adaptation to Climate Change project. This includes “climate proofing” the culvert size to accommodate increased intensity rainfall and a minimum road surface level. Where the road is located directly behind the fringing mangroves it will be elevated to a minimum of 3 feet above high spring tide level.

It is suggested that developing an alternative inland road network as outlined and prioritised in the earlier sections of this document is a much higher priority than any further upgrading or extension of this section of road.

4.2.8 Other infrastructure: Airport and Okat Harbour

Over the next one to two generations both the airport and port infrastructure are likely to cope with the modest increases in sea-level rise and other climate change effects although maintenance requirements may increase. However, as sea-level rise continues to increase in to the future, the airport facility and runway will be increasingly impacted if improvements in coastal defences are not implemented. Increasing frequency and magnitude of wave overtopping of the present coastal defences surrounding the runway must be expected and given the importance of this facility continued monitoring and a focus on upgrading coastal protection (and in the future potentially runway and shoulder elevations) will be an important priority as sea levels rise.

4.3 Safe development and relocation of existing property

Strategy 4: Ensure new development (property, infrastructure) is located away from areas at risk from present and future coastal hazards.

Strategy 5: A programme of encouraging existing residential property to be relocated away from areas at risk from present and future hazards as it is replaced or renovated.

Over time reducing the number of residential properties located on land that is too low lying or too close to the shoreline is critical if Kosrae is to build communities resilient to the future effects of coastal hazards and climate change.

More effective application of the KIRMA Regulations for Development in ensuring new properties are not located in coastal-hazard prone areas is fundamental (see Section 3 and Figure 12). This should aim to avoid future development in locations:

- Seaward of the paved section of road between Okat and Utwe.
- Within 50 feet (15 m) of the shore or mangrove vegetation line or top of seawall structures (including no further land reclamation over mangrove or beach areas).

- Located on land less than the 4 m (4 m contour) above land vertical datum on Kosrae (this is approximately 6 feet (2 m) above the present day high water mark) or in mangrove areas.

For existing properties relocation does not need to happen immediately, rather it may take place in a gradual, planned and proactive manner over the next one to two generations. For example as homes are replaced or significantly upgraded these could be assisted to relocate to less vulnerable areas. It is also recommended that no further ad hoc coastal defences be permitted to be built to protect existing property.

4.3.1 Incentives for developing in safer locations

Strategy 6: Incorporate a grant component in to the loan programme to help encourage new property to be constructed in areas not exposed to coastal, river floor or landslide hazards.

Whilst the KIRMA Regulations for Development Projects provided a regulatory mechanism for controlling future development of residential and commercial property in locations at risk from coastal hazards, there is also opportunity for providing an incentive mechanisms for achieving effective adaptation.

A substantial proportion of housing redevelopment or construction of new property is carried out with financial assistance in the form of a loan from the Housing and Renovation Division of the Department of Resources and Economic Development. The Division also administers the two USDA Rural Development loan programmes (Table 7).

At present all new housing loans are reviewed by a number of Government Departments including KIRMA (Development Permit and EIA requirements), Historic and Preservation, Sanitation, Governor’s Office (land use rights and to ensure not to be located on Government land) and the Department of Resources and Economic Development (who act as trustee and ensures the property is not located above the Japanese Line or below the high water mark).

Incorporating a grant component in to the loan that does not need to be paid back could provide an incentive to encourage people when building a new house to relocate further inland (assuming that they own accessible land or alternative land is made available). Given the number of new loans on Kosrae the total costs may be relatively modest (of the order of \$100k–\$150k per year for an incentive of \$2,000–\$3,000 per loan). The potential for donors to fund the grant programme as adaptation support to Kosrae should be explored.

Strict guidelines would need to be defined and applied to ensure clear understanding of what acceptable criteria for recipients of the grant would be. In addition to meeting all current State clearing house requirements and KIRMA Development Project Regulation requirements, at the very minimum it is suggested the following be included:

- Be located on land levels greater than 6 feet (2 m) above present high tide levels.
- Not be located on the storm or beach berm, on reclaimed land over the shoreline, mangroves, saline or freshwater swamp areas, or on any other areas affected by coastal erosion or flooding from wave overwash.
- Not involve clearing of, or construction on, steep land or on land with a potential landslip risk (including access road).
- Not be located in areas prone to river or stream flooding or with current waterlogging or drainage issues.
- Have a buffer of at least 50 feet between land cleared for the property and any coastal, mangrove or river/stream waterway.

Table 7: Housing loan programmes available on Kosrae.

| Programme | Purpose | Annual number of loans | Loan value | Loan duration |
|------------------------|---|------------------------|---|----------------|
| Housing loan programme | New residential property construction | 30–50 | Maximum of \$30,000 | 6–20 years |
| USDA 502 | New residential or commercial property construction | Unknown | \$8,000–\$80,000 secured against property (state acts as trustee) | 10–15 years |
| USDA 504 | Residential property renovation | 50–60 | \$500 - \$7,500 not secured | Up to 20 years |

4.3.2 Development of a relocation strategy

Strategy 7: Commence community and state discussions to develop a relocation strategy identifying potential approaches to support relocation from areas exposed to coastal hazards where no alternative land is available.

Whilst many families on Kosrae have access to alternative land areas on the higher volcanic parts of the island away from the coastline, there will be a significant number of families who do not own alternative safe land for relocation. It will be important to begin community discussions with a view to developing approaches on Kosrae to ensure there are community options for everyone. Whilst this may not be a significant issue over the next one to two generations such discussions maybe take

several years to conclude and will be a complex and sensitive. Therefore starting such consultations now, rather than waiting until the situation forces decisions to be made, would provide certainty and security.

Examples of approaches could include land swaps with surplus Government land, opening up small areas of low gradient land above the Japanese line (e.g., between Innem and Okat), or development of a community relocation fund to support the purchase of land.

An aerial photograph of a tropical island. In the foreground, a long, straight asphalt runway runs parallel to a sandy beach. To the right of the runway is a lush green area with a winding river that flows into the ocean. Further inland, there are several buildings, including a large white warehouse and a cluster of smaller red-roofed structures. The background is dominated by a large, forested mountain with a prominent peak. The sky is filled with soft, white clouds.

5 Defending

The future role of coastal defences

5.1 Introduction

On Kosrae, as in many other places, seawalls or other forms of constructed coastal defences are typically seen as the "solution" to coastal erosion and flooding problems.

Unfortunately such approaches:

- Are reactive usually in response to damaging coastal hazard events.
- Rarely the most effective or sustainable option in the long-term, particularly in areas prone to coastal flooding given the levels of sea-level rise likely to be experienced in the latter part of this century.
- Can lead to a false sense of security and often encourage further development behind coastal defences (Figure 20). No present seawall on Kosrae will prevent wave overwashing and resulting damage, from severe events such as occurred during the December 2008 swells on the Tafunsak coast or if a major typhoon was to track close to Kosrae.
- Often lead to other environmental damage (such as exacerbated erosion as occurred at Sandy Beach Hotel) and impacts on other community values (such as access to the reef flat).
- Typically result in an expectation that protection provided by such defences will continue to be maintained by

the Government, leading to ever increasing financial commitment to maintain and upgrade such defences, and ever increasing difficulty in implementing more sustainable development options.

- On a retreating coastline such as south of Malem, the effectiveness of such defences is continually being reduced whilst the potential negative impacts caused by the defence often increases.

Where such structures become permanent features there will be longer-term impacts that will affect the ability of Kosrae's coastline to naturally respond to the long-term effects of sea-level rise. Such aspects are rarely considered but are important if Pacific Islands such as Kosrae are to successfully adapt to climate change effects.

For example the reclaimed areas of Lelu Island and Utwe village are two highly developed areas that will face particular challenges due to sea-level rise. The level of the reclaimed land in both villages is barely above present high (king) spring tide levels with some areas already experiencing frequent high tide flooding. Whilst both these areas are protected by seawall structures, these structures will not prevent the ever increasing frequency of flooding of the low-lying land behind them.

For revetment and seawall structures constructed on the open sections of coast, such as at Tafunsak and Malem villages, sea-level rise will significantly reduce the effectiveness of these defences, for example:

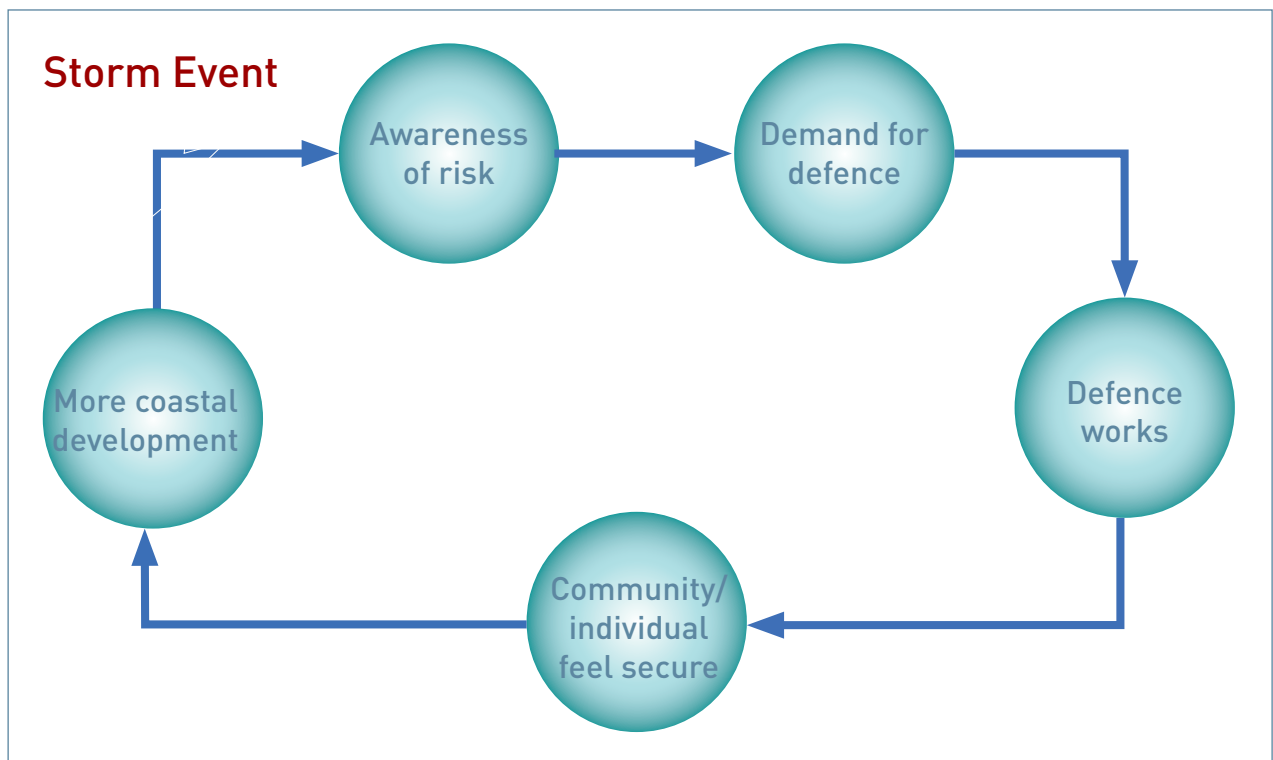


Figure 20: The develop-defend-develop cycle. Seawalls are often built in response to a storm event. This often then leads to a sense of security within the community that they are “protected” often leading to further development on land that is either too low lying or too close to the shoreline. When a further storm occurs, or the coastal defence breaks down and does not provide as much protection as anticipated there is a demand for bigger and better defences. This develop-defend-develop cycle that results typically causes the hazard problem to become more complex over time as the root cause of the problem is ignored, that is that people reside and infrastructure is developed on land that is at risk from coastal hazards.

- The frequency that these defences are overtopped by waves will increase due to greater water depths at the structure allowing larger waves to propagate over the reef flat and reach the structure.
- Greater water depths at the structure and increased exposure of the defence to larger waves will increase the risk of damage and failure of the defence. For example with rock structures, the size of rock required for stability is directly proportional to the cube of the significant wave height. Hence even a small increase in wave conditions at the defence can result in a large increase in the size of rock armour required to achieve the same present-day stability.

Over the next one to two generations, the effect of sea-level rise on the ability of existing defences to provide a “satisfactory” level of protection is likely to be manageable through, for example upgrading the level of protection of these existing defences. However, beyond this time the magnitude of sea-level rise is expected to be too great to enable such protection to be effective or affordable other than at locations where there are no other management or adaptation options.

As Kosrae has discovered, adequately constructed coastal defences have a high capital cost, typically have a high maintenance requirement, and have a limited lifespan at best probably around 20 to 30 years. As a long-term approach they are typically a very expensive option. A transition needs to occur where coastal defences are only used where there are no other cost effective options to reduce coastal hazard-related risk.

As part of this transition, both the State and Municipal Governments on Kosrae already face a considerable future financial commitment ensuring existing coastal defences are maintained and upgraded, to provide a satisfactory level of protection to enable longer-term adaptation strategies to be implemented and before any further new coastal defences are planned.

Strategy 8: A strategic approach is adopted for the ongoing provision of coastal defences only where it is a sustainable long-term option or where a transitional approach to protecting areas over the short to medium term to enable repositioning strategies to be implemented.

Such a strategy requires:

- Long-term defences: a priority on protecting sections of road or other critical infrastructure where there is no other feasible option to reposition away from coastal hazards.
- Transitional defences:
 - Upgrading sections of existing defences to provide

adequate temporary protection for the road or highly developed areas over the short to medium term (1 to 2 generations) to enable longer-term adaptation strategies (namely relocation) to be implemented.

- Limiting any new sections of coastal defences only to the areas where the road is critically threatened at present (e.g., at Pal and Mosral). This would be undertaken only with a view to provide short to medium term (1 to 2 generations) protection to enable longer-term adaptation strategies to be implemented.

The locations where long-term and transitional protection will be required are shown in Figure 21. Most areas marked as “transitional defences” already have coastal defences in place. Maintaining, and in some cases, upgrading these existing defences will be required to enable the longer term strategies outlined in Sections 4.2 and 4.3 to be implemented.

5.1.1 Long-term protection requirements

There are several locations where there are limited or no other adaptation options available. At this time most of these sections of shoreline already have coastal defences in place however upgraded engineering will be required over the long-term (beyond 2 generations/the 2050’s) to protect infrastructure. Future requirements for these defences are summarised in Table 8 and Figure 22.

In the majority of cases this will require maintaining the existing defences when damage occurs, upgrading rock armour layers where they are currently inadequate (for example Lelu Causeway), and improving on the wave overtopping performance as sea-level rise results in higher volumes and more frequent wave overtopping of existing defences. In the short to medium term (1 to 2 generations) this may require additional crest protection, such as mass concrete upstands/wave return walls at the landward edge of the rock revetment crest.

In the longer term, given the rates of sea-level rise likely to be experienced over the second half of this century, rock revetments may need to be replaced with larger structures, higher crest levels and potentially infrastructure raised behind the protection.

Only at Wiya is there likely a need for new long-term protection. Around the headland between Wiya and Malsu there is no scope to reposition the road further inland. Whilst between Wiya and Yekula, the road could be moved back slightly, however future protection would likely still be required.

A current (2013) proposal for Japanese assistance to upgrade a number of coastal defences covers a number of the sections included in Table 8 including:

- Upgrading the armour protection along the harbour side of Lelu Causeway.
- Headland between Malsu and Wiya and along the Wiya shoreline.

Defending

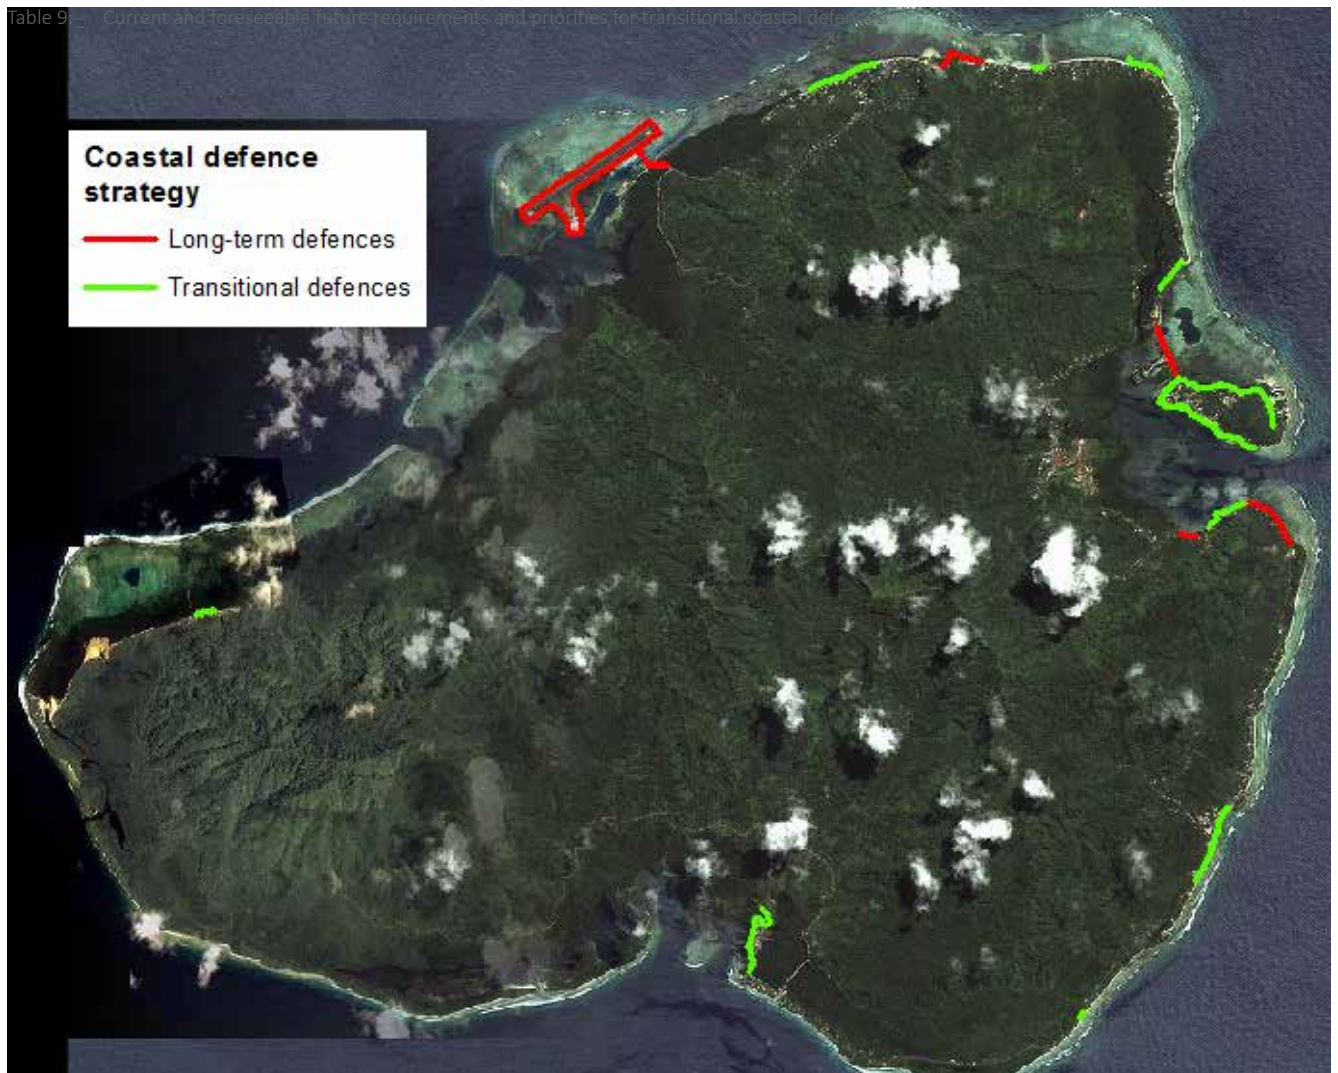


Figure 21: Location of where long term and transitional coastal defences will be required.

Table 8: Current and foreseeable future requirements and priorities for sections of coast requiring long term coastal defences.

| Location | Approx. length of protection | Current Priority | Details |
|-------------------|------------------------------|------------------|--|
| Okat Airport/Port | 3000 m 3300 yards | Low | Continued maintenance and upgrading of the rock armour protection around the airport runway. In the future this may require further crest protection along the ocean-facing exposed sections to reduce any increased frequency of wave overtopping. Maintenance requirements to rock armour along the ocean-facing side may increase as sea-level rise allows larger waves to reach the defence. Continued maintenance of concrete wharf and walls at the port. |

| | | | |
|---|--------------------|--------|---|
| Okat access road | 620 m 680 yds | Low | Continued maintenance and future upgrading if required to the rock protection along the landward access to the bridge to the airport and dock. |
| Headland between Malsu and Wiya | 290 m 320 yds | Medium | Upgrade of existing rock protection to the road and FSM Telecom tower from Malsu around the corner to Wiya. The revetment armour layer should be at least two rocks thick and at a slope no greater than 1 : 1. Given the minimal width of road shoulder or revetment crest, a concrete upstand may be required at the crest between the road edge and the rock armour. |
| Wiya | 290 m 320 yds | Low | New rock revetment to protect the road between Wiya and Yekula. The revetment armour layer should be two rocks thick, at a preferred slope of 1 : 3, with a crest width of three rocks wide at the shoulder of the road. |
| Lelu Causeway (seaward) | 650 m 715 yds | Medium | Upgrade armour protection of the causeway with single layer of rock armour at a 1 : 1 slope. A secondary layer may be required in the future as well as further crest protection such as a concrete upstand. |
| Lelu Causeway (Harbour-Lelu Island to Marine Resources) | 245 m 270 yds | Medium | Upgrade armour protection of the causeway with single layer of rock armour at a 1 : 1 slope. |
| Lelu Causeway (Harbour-Marine Resources to Finpukal) | 310 m 340 yds | Medium | Upgrade armour protection of the causeway with single layer of rock armour at a 1 : 1 slope. |
| Tafuyat | 225 yds 245 yds | Medium | Upgrade existing rock protection if high tide wave overtopping becomes too frequent with concrete wave upstand between revetment crest and road. |
| Leyot to Mutunlik | 800 m 875 yds | Medium | Upgrade existing rock protection with a second armour layer. If high tide wave overtopping becomes too frequent install concrete wave upstand between revetment crest and road. |

5.1.2 Transitional protection requirements

Future requirements for defences required over the short to medium term (1 to 2 generations) to enable longer-term adaptation strategies to be implemented are summarised in Table 9 and Figure 22. Again many of these defences are already in place and the financial commitment to maintain and in many cases upgrade them to provide an adequate level of protection over the next one to two generations will be considerable. In the longer-term, over the second half of this century, the rate of sea-level rise will mean that these coastal defences either:

- Become increasingly in-effective: particularly where the impacts are due to increasingly more frequent high tide flooding (such as the reclaimed areas upon which Lelu and Utwe villages are located).
- Become too expensive to maintain, upgrade or replace to continue to provide a suitable standard of protection.

The highest priority for transitional defences remains the upgrade of the defences at Malem village, extension of protection to the south along the critically exposed section of road at Pal and at Mosral. These section should be the priority focus for any further coastal defence work in the immediate future.

Defending

Table 9: Current and foreseeable future requirements and priorities for transitional coastal defences.

| Location | Approx. length of protection | Current Priority | Details |
|-----------------------------|------------------------------|------------------|--|
| Tafunsak village | 880 m 970 yds | Medium | Maintain existing rock armour defence. Potential upgrades include: <ul style="list-style-type: none"> Reconfiguring western end of defence to alleviate downdrift erosion impacts. For example, short breakwater with beach nourishment behind (similar to Sandy Beach). Extending the revetment across the outlet of Infal Mutunte (now relocated to Malsu) to prevent high tide and swell inundation through the opening in the defence. Constructing a concrete wave upstand at the landward edge of the revetment crest to improve the performance in reducing wave overtopping during large swell events. |
| Finfukul | 160 m 175 yds | Medium | Maintain existing rock armour defence. Constructing a concrete wave upstand at the landward edge of the revetment crest to protect edge of the road and improve the performance in reducing wave overtopping. |
| Finaunpes | 525 m 575 yds | Low | Maintain current rock revetment and breakwater. |
| Pacific Treelodge/ Putuk | 425 m 465 yds | Medium | Replacement when required of the concrete mattress revetment with a sloping rock revetment to the same slope as the existing revetment. Replace vertical concrete wall with sloping rock revetment. The revetment should be founded on the reef flat and located at the crest of the beach. The beach should be reinstated on the seaward side of the structure. Any mangroves should be retained. |
| North Lelu Island | 1560 m 1710 yds | Medium | Upgrading of sections of largely coral rock wall protection as required with a sloping rock revetment at a 1 : 1 slope and crest above the level of the road (as is currently in place along various sections). The emphasis should be on maintaining the current line of land with no further reclamation occurring. Any mangroves fronting the defences should be retained. |
| South Lelu Island | 2210 m 2420 yds | Medium | Upgrading of sections of largely coral rock wall protection as required with a sloping rock revetment at a 1 : 1 slope and crest above the level of the road (as is currently in place along various sections). The emphasis should be on maintaining the current line of land with no further reclamation occurring. |
| Muntunlik | 615 m 675 yds | Low | Upgrading of sections of largely coral rock wall protection as required with a sloping rock revetment at a 1 : 1 slope and crest above the land level. The emphasis should be on maintaining the current line of land with no further reclamation occurring. |
| Malem village (North) | 340 m 370 yds | Low | Reconstruct existing poorly constructed rock revetment to provide a consistent revetment profile with a 1 : 3 slope, average rock size of 0.66 m (2 feet), double layer or armour and crest of three rocks wide. Future upgrade to include mass concrete wave upstand wall at landward edge of revetment crest if wave overtopping frequency increases with sea-level rise. |

| Location | Approx. length of protection | Current Priority | Details |
|-----------------------|------------------------------|------------------|---|
| Mali village (Kotfwa) | 500 m 550 yds | High | <p>Northern section: Upgrade existing single layer rock armour revetment to two layers, maintaining the 1 : 3 slope, average rock size of 0.66 m (2 feet), with a revetment crest of 3 rocks wide.</p> <p>Southern section: Reconstruct existing poorly constructed rock revetment to provide a consistent revetment profile with a 1 : 3 slope, double layer or armour and crest of three rocks wide.</p> <p>Future upgrade to include mass concrete wave upstand wall at landward edge of revetment crest if wave overtopping frequency increases with sea-level rise.</p> |
| Pal | 160 m 175 yds | High | <p>New rock revetment from the southern end of the exiting rock armour along the section where the road is critically exposed. Existing dumped concrete rubble will need to be removed. The revetment should be to the same profile as the upgraded sections to the north with a 1 : 3 slope, double layer of rock armour, average rock size of 0.66 m (2 feet), and a crest 3 rocks wide. Given the proximity of the road a mass concrete wave upstand wall at the landward edge of revetment crest may also be required to ensure wave overtopping is minimised, either now or sometime in the future.</p> <p>The new revetment will need to extend behind the existing shoreline at the southern end to prevent outflanking and further downdrift erosion. However, further retreat of the shoreline will occur at the southern end and some form of additional low reef flat breakwater may also be required to 'stabilise' the shoreline at the southern end of the revetment to prevent further exposure of the road.</p> |
| Mosral | 110 m 120 yds | High | <p>New rock revetment from the outlet of Infal Mosral tideflex structure along the section where the road is critically exposed. The existing mass concrete bags can be retained with the revetment constructed seaward of them. The revetment should be at a 1 : 2 to 1 : 3 slope, double layer of rock armour, average rock size of 0.66 m (2 feet), and a crest 3 rocks wide. Given the relatively low-level of the road a mass concrete wave upstand wall at the landward edge of revetment crest may also be required to ensure wave overtopping is minimised, either now or sometime in the future.</p> <p>Outflanking and further downdrift erosion will occur at the southern end of the revetment and some form of additional low reef flat breakwater may also be required to 'stabilise' the shoreline at the southern end of the revetment to prevent further exposure of the road.</p> |
| Utwe village | 1015 m 1110 yds | Medium | <p>Upgrading of sections of largely coral rock wall protection as required with a sloping rock revetment at a 1 : 1 slope and crest above the land level. The emphasis should be on maintaining the current line of land with no further reclamation occurring.</p> |
| Walung (Insiarf) | 230 m 250 yds | Medium | <p>Maintain existing rock armour revetment.</p> |



6 Monitoring adaptation progress

The measures outlined above are intended to provide a strategic approach to long-term reduction of coastal hazard risks to infrastructure and communities on Kosrae. They will also provide a means to effectively adapt to the physical changes that climate change and sea-level rise will cause to Kosrae's present coastal margins.

Such risks (e.g., from exposure to the impacts of inundation or erosion, or the consequences of a damaging event) to the communities in Kosrae will change with time. Some activities or decisions will increase such risks, other activities will reduce them. An important aspect to help inform decision-making is to monitor and assess how such risks are changing over time and whether the relevant decisions that have previously been made have been effective in helping reduce coastal hazard related risks.

Outlined below is an initial attempt at developing a set of quantifiable measures, based on the strategies outlined above, that could be used to assess how the risks associated with coastal hazards change over time and how well Kosrae is progressing in addressing these changing risks. It is by no means a complete list and may well require further refinement in the future. By carrying out an assessment of the relevant factors that will increase or decrease risk on say an annual basis, the progress that Kosrae makes in reducing their risks to coastal hazards can be monitored.

1. Number of community awareness and outreach activities implemented with a focus on reducing and minimising human impacts on the natural coastal defences over the last 2 years.

2. Number of sand mining incidents reported/investigated by KIRMA over the last 2 years.
3. KIRMA regulations updated to better incorporate risk reduction and adaptation considerations in to the development review process.
4. Total number of developments (farm roads, properties) above the Japanese Line.
5. Total length of new inland primary road constructed.
6. Total number of residential properties located seaward of the circumferential road in Lelu, Malem, Utwe and Tafunsak.
7. Total number of residential properties located on the beach berm in Walung.
8. Total number of properties located below or seaward of the 4 m contour.
9. Long-term relocation strategies developed for at-risk communities.
10. Total number (and length) of long-term coastal defence recommendations implemented.
11. Total number (and length) of transitional coastal defence recommendations implemented.
12. Total number (and length) of seawall structures built without KIRMA permit or not aligned with requirements identified in this strategy.

Table 10 provides a summary of the situation as of late 2013.



Monitoring adaptation progress

Table 10: Summary of indicators as of late 2013 and goal over the next two generations.

| No. | Indicator | Required progress direction | 2013 | By 2050 |
|-----|--|---|-------------------------------|-----------------------|
| 1 | Number of community awareness and outreach activities implemented with a focus on reducing and minimising human impacts on the natural coastal defences over the last 2 years. |  | ? | ? |
| 2 | Number of sand mining incidents reported/investigated by KIRMA over the last 2 years. |  | ? | 0 |
| 3 | KIRMA regulations updated to better incorporate risk reduction and adaptation considerations in to the development review progress. | - | No | Yes |
| 4 | Total number of developments (farm roads, properties) above the Japanese Line. |  | ? | 0 |
| 5 | Total length of new inland primary road constructed. |  | 0 | - |
| 6 | Total number of residential (2010 census) properties located on the beach/storm berm/ reclaimed land and seaward of the circumferential road: <ul style="list-style-type: none"> • Lelu • Malem • Utwe • Tafunsak |  | 75 48 43 20 | 0 |
| 7 | Total number of residential (2010 census) properties located on the beach berm in Walung. |  | 29 | 0 |
| 8 | Total number of properties (2010 census) located below or seaward of the 4 m contour: <ul style="list-style-type: none"> • Lelu • Malem • Utwe • Tafunsak • Walung |  | 334 222 145 87 32 | 0 0 0 0 0 |
| 9 | Long-term relocation strategies developed for at-risk communities. | - | No | Yes |
| 10 | Total number (and length) of long-term coastal defence recommendations implemented. |  | 0 | 9 |
| 11 | Total number (and length) of transitional coastal defence recommendations implemented. |  | 0 | 13 |
| 12 | Total number (and length) of seawall structures built without KIRMA permit/not aligned with requirements identified in this strategy in last 2 years. |  | - | 0 |

7 References and bibliography

References

- Auyong, J.S., Cripe, K., DesRochers, J., Dixon, M., Ham, M., Lal, P. (1990) Kosrae Island Resource Management Plan. Volume II, Honolulu, HA, University of Hawaii, Sea Grant Extension Service.
- Bloom, A.L. (1970) Holocene submergence in Micronesia as the standard for eustatic sea-level change. *Quaternaria*, 12: 145–154.
- Bloom, A.L. (1970) Paludal stratigraphy of Truk, Ponape, and Kusaie, eastern Caroline Islands. *Geological Society of America Bulletin*, 81: 1895–1904.
- Buck, E.M. (2005) Island of Angels. *The growth of the church on Kosrae 1852–2002*. Watermark Publishing.
- Casey, K. (1997) Kosrae Watershed Management Plan. USDA Forest Service, Institute of Pacific Island Forestry.
- Cote, J., Jackson, R. (1997) Kosrae Coastal Protection Study. Kosrae Island Resource Management Strategy. September 1997.
- Cote, J.C. (1997) Brief summary of site evaluation and recommendations for Malem Municipality. University of Oregon Micronesia and South Pacific Program.
- Coulbourn, W.T. (1988) Coastal erosion and dredge pits on the reef at Tafunsak Village, Kosrae Island, Federated States of Micronesia. Honolulu, Hawaii: 16.
- Curry, J.R., Shepard, F.P., Vech, H.H. (1970) Late Quaternary sea-level studies in Micronesia: CARMARSEL Expedition. *Geological Society of America Bulletin*, 81: 1865–1880.
- Dahl, K. (1990) Kosrae Island Resource Management Program, Volume 1, Tofol, Kosrae. Kosrae State Government.
- Development Review Commission. (2000) Kosrae Shoreline Management Plan. Prepared by the Development Review Commission, Kosrae.
- Fujimoto, K., Miyagi, T., Kikuchi, T. (1995) Formative and maintainable mechanisms of mangrove habitats in Micronesia and the Philippines. Kikuchi, T. (ed.) *Rapid sea level rise and mangrove habitat*. Report of grant-in-aid for scientific research from the Ministry of Education, Science and Culture, Japan, No 04041020.
- Goodwin, R., Hadley, R., Zheng, K. (1998) Vulnerability assessment of Kosrae Island to climate change and accelerated sea level rise.
- He, C. (2001) Coastal erosion assessment, Malem village, Kosrae State, Federated States of Micronesia. *SOPAC Technical Report*, 341.
- Laird, W.E. (1983) Soil Survey of the island of Kosrae, Federated States of Micronesia US Department of Agriculture, Soil Conservation Service.
- Lee, L. (1997) Kosrae climate change and sea level rise vulnerability analysis climatic data report. College of Micronesia.
- Lewis, J. (1949) Kusaiean Acculturation, Coordinated Investigation of Micronesian Anthropology. *Report 17*. Washington DC. Pacific Science Board National Research Council.
- Margos, J.E. (1993) Impact of coastal construction on coral reefs in the U.S. Affiliated Pacific Islands. *Coastal Management*, 21: 235–269.
- Merlin, M., Taulung, R., James, J. (1993) Plants and environments of Kosrae. Honolulu: East-West Center: 113.
- Moffat & Nichol, Engineers (1988) Concept Beach Restoration Report: Kosrae Beach Erosion Mitigation. Long Beach, California, 3 August 1988.
- Moffat & Nichol, Engineers, (1991) Tafunsak Beach Restoration Project: Phase 1 Report. Prepared for Tafunsak Beach Association, Inc. Long Beach, California, July 1991.
- Moffat & Nichol, Engineers, (1994) Tafunsak Beach Restoration Project Contract Documents and Special Provisions.
- Office of Planning and Statistics, Trust Territory of the Pacific Islands (1979) Kosrae Land Use Guide, Saipan, Mariana Islands.
- Randall, R.H., Smith, B.D. (1991) A study of recent erosion along the Pukusruk and Panyea coastal region of Kosrae, Eastern Caroline Islands. Preliminary report submitted to Micronesian Legal Services, Kosrae Office, Kosrae. University of Guam, *Marine Laboratory Technical Report*, (63): 21.
- Rudin, V. (1994) Kosrae State shoreline and reef management strategy. University of Oregon Micronesia and South Pacific Program.
- Ritter, P.L. (1978) *The repopulation of Kosrae: Population and Social organization on a micronesian high island*. PhD dissertation, Stanford University, Ann Arbor, USA.
- Ritter, P.L. (1981) The population of Kosrae at contact, *Micronesia*, 17: 11–28.
- Scarffert, E. (1919) Kusae, Ergebnisse der Sudsee-Expedition 1908–1919, G. Thilenius (ed), Series 2, Section B, Vol. 4, Hamburg, Friederichsen.

- Sea Engineering Inc (1988) Shoreline Erosion Investigations: Tafunsak Village, Kosrae State, FSM. Prepared for Carlsmith, Wichman, Mukai and Ichiki. Waimanalo, Hawaii.
- Segal, H.G. (1989) Kosrae: The sleeping lady awakens. Pohnpei, Federated States of Micronesia: Published by the Kosrae Tourist Division, Department of Conservation and Development, Kosrae State Government, Federated States of Micronesia.
- Shepard, F.P., Currey, J.R., Newton, W.A., Bloom, A.L., Newell, J.I., Tracey, J.I. (Jr), Vech, H.H. (1961) Holocene changes in sea level: evidence in Micronesia. *Science*, 157 (3788): 542-544.
- US Army Corps of Engineers (Pacific Ocean Division) (1987) Kosrae Coastal Resource Atlas. Mana Mapworks, Hawaii.
- US Army Corps of Engineers, Pacific Ocean Division. (1987) Engineers report on Tafunsak village erosion. Prepared by the US Army Engineer District, Honolulu, Engineering Division, Planning Branch, Hydraulic/Hydrology Section. Fort Shafter, Hawaii.
- US Army Corps of Engineers (Pacific Ocean Division) (1989) Kosrae Coastal Resources Inventory.
- US Army Corps of Engineers, Pacific Ocean Division (1987) Design analysis and cost estimates for shoreline protection at Tafunsak village, Kosrae State, Federated States of Micronesia. Prepared by the US Army Engineer District, Honolulu, Engineering Division, Planning Branch, Hydraulic/Hydrology Section. Fort Shafter, Hawaii.
- Woodward, P. (1998) Re-survey of Kosrae beach profiles, Federated States of Micronesia. *SOPAC Preliminary Report*, 92.
- Xue, C. (1996) Coastal sedimentation, erosion and management on Kosrae, Federated States of Micronesia. *SOPAC Technical Report*, 228.
- Xue, C. (1999) Coastal Sedimentation, erosion and management on the North coast of Kosrae, Federated States of Micronesia. *Journal of Coastal Research*, 15(4): 927-935.





Appendix A

Summary of progress on the recommendations
made in the Shoreline Management Plan in 2000

| Recommendation | Progress | Comments |
|---|----------|--|
| The natural environment | | |
| Coral reef and reef flat: | | |
| Every effort needs to be directed at continuing to protect the health of Kosrae's living coral reef from land based human impacts. | ✓ | An ongoing issue. |
| The present practice of not removing coral rubble, shingle and sand from the reef flat be continued and that it be regulated if such activity re-commences. | ✓ | Rubble and sediment from the reef flat has not been removed. |
| A full Environmental Impact Assessment is carried out by qualified personnel before any further reef flat dredging is permitted. However, it is strongly recommended that no further dredging of any part of the fringing reef flat be conducted. | ✓ | No further dredging (other than at the ship repair facility) has taken place. |
| Stricter regulation, enforcement, training and education aimed at managing and reducing both residential and industrial sources of pollution will be vital for the long-term health of Kosrae's living reef biota. | ✓ | No significant suggestion that pollution from land-based sources is. |
| Beaches and the shoreline: | | |
| A long-term source of construction sand needs to be developed to meet Kosrae's future development needs. Existing sand resources in the coastal hinterland are extremely limited and increasingly will not meet Kosrae's construction demands. | ✗ | Still a pressing issue. |
| Sand mining from the beaches of Kosrae needs to be regulated. However, experience from other small island developing states suggests that this is likely to only be effective once a suitable long-term alternative to beach sand is available. | = | Sand mining from beaches has reduced considerably due to KIRMA awareness effort but still practiced and is still an issue. |
| Vegetation clearing be discouraged for at least 50 m behind the vegetation line at the shoreline. Where possible the planting of typical coastal strand vegetation should be encouraged. | ✗ | Still a pressing issue. |
| Construction of new coastal defences and land reclamation over the beach be strictly controlled and regulated through the Development Review Process. This is particularly important on the exposed sections of coastline (i.e., those facing the open ocean). | ✗ | Inappropriate reclamation and coastal defences still being constructed. |
| Mangroves | | |
| Mangrove replanting, to provide natural coastal protection to the coastline, is a suitable mechanism in the following areas: <ul style="list-style-type: none"> Lelu lagoon:- potentially from Mitais, all along the northern coastline of Lelu Island, the Causeway and Finpukal. Lelu Harbour:- Mutunnenea area (south of the bridge). Tafuyat:- mainly the area where mangroves died off due to the oil spill that occurred sometime in the 1980's. | ✗ | Some mangrove planting attempted in Lelu lagoon but have not established. |
| The area of mangrove replanting should be at least 50 meters wide. This is approximately the width, in a mature mangrove strand, that would effectively dissipate a 1 m high wave. | ✗ | - |
| Should a severe storm or typhoon affect the mangrove strands on Kosrae, it is recommended that human activity, such as the removal of felled trees, be discouraged from the damaged areas and immediate surroundings to allow the damaged area to recover naturally. | ✓ | No typhoons or serious storms have affected Kosrae. |
| From a coastal protection viewpoint, that harvesting of mangrove timber is discouraged from within 100 m of the outer mangrove fringe and from within 50 m of major channels. | ✓ | No significant suggestion that detrimental Mangrove harvesting is occurring . |

Appendix A

| Recommendation | Progress | Comments |
|---|----------|---|
| Wetland areas and rivers | | |
| Where it is deemed necessary to develop swamp areas for activities such as agriculture, it is recommended that buffer zones of at least 100m be established around rivers and major drainage channels and along the coastal edge of the swamp. | ✘ | Buffer zones rarely applied. |
| Further farm roads through wetland swamp areas, particularly between Tenwak and Kuplu, be discouraged | ✓ | No further roads appear to be constructed |
| Future culverts and bridges over natural drainage channels and rivers are of sufficient size to have as little influence as possible on the passage of flood flows due to high rainfall events. | ✓ | New guidance being developed and implemented as part of PACC project |
| Development or alteration of artificial river or drainage channels outlets is not recommended and should be controlled within the Development Review Permitting Process | = | No further significant river or drainage channel works conducted. |
| The built environment | | |
| Infrastructure: | | |
| Building further sea walls or other forms of coastal defences is not a recommended, appropriate or affordable option for the long-term protection of most of the existing infrastructure at risk from coastal hazards. | ✘ | Continued. |
| With the current re-negotiation of the Compact Funding, it is recommended that now is an ideal opportunity for the Government of Kosrae to consider a program of developing Kosrae's essential infrastructure inland away from such high risk areas. Within the next 10 to 15 years an inland road will be required between Utwe and Tenwak, and between Mutunnenea and Yekula or Wiya. Over this time, it is recommended that this road be developed as the main road linking the Municipalities | ✘ | No progress on developing inland roads. General conditions of existing inland farm roads have deteriorated. |
| It is recommended that the existing practice of constructing the inland road around the perimeter of the lower slopes of the volcanic part of the island, above the freshwater swamp areas be continued, taking due care to minimize road slopes, run-off, and ensuring adequate culverts are installed to minimize changes to drainage patterns and to cope with periods of heavy rainfall. | ✓ | Being applied in the extension of the road from Utwe to Walung and the extension of the road from Okat as part of the PACC project. |
| In developing the new sections of inland road, priority be given to: <ul style="list-style-type: none"> Extend the inland road between Malem village (Mutacsrisr) and Mosral. Developing the road behind Sialat and Finfukul to Yekula or Wiya. | ✘ | No progress. |
| Further development of the circumferential road beyond Okat bridge, towards Walung, be constructed around the perimeter of the lower slopes of the volcanic part of the island above freshwater swamp areas, taking due care to minimize road slopes, run-off, and ensuring adequate culverts are installed to minimize changes to drainage patterns and to cope with periods of heavy rainfall. | ✓ | Being incorporated as part of the PACC project. |
| Upgrading and construction of coastal defences is recommended to protect the existing road at certain key areas where there is little opportunity to develop further inland. | ✓ | Sea walls have been upgraded or constructed at Finfukul, Tafuyat, Leyot/ Mutunlik and Malem. |
| Residential property | | |
| Over the next ten to fifteen years, reducing the number of residential properties constructed or located within coastal hazard areas is of the highest priority. | ✘ | No strategic progress made. |

| Recommendation | Progress | Comments |
|--|----------|--|
| The Government assist individuals in developing residential property out-with coastal hazard risk areas by gradually developing the existing essential infrastructure (roads, electricity, telecommunications) along an inland route. | ✘ | No progress made. |
| Where new development and property construction does occur close to the coastline, a general set-back zone of at least 100 feet from the vegetation line at the coastline be adopted. | ✘ | Not applied. |
| The construction of sea walls or other forms of coastal defence to protect individual property is not permitted where there is no existing coastal protection structures. Future construction of sea walls or other forms of low cost coastal defences is not a recommended option for the protection of residential property outwith certain locations. | ✘ | Ad hoc seawall structures still being built. |
| Land owners / housebuilders are advised that no hard structures will be permitted in front of newly built properties that have been located seaward of the circumferential road. | ✘ | Not occurring to any great extent. |
| The DRC continue to work with the Housing Renovation Loan Fund Office (Department of Commerce and Industry) and the Rural Development Office (USDA) to minimize the development of loan-funded housing within coastal hazard areas. | ✓ | Ongoing as part of the housing loan application process. |
| If it is felt that regulation of residential development is required in coastal hazard areas, above the measures that have been incorporated within the Housing Renovation Loan Fund and Rural Development processes, it is recommended that changes be made to the Development Review Process to include all residential housing. | = | Strengthening the Development Review regulations is currently being conducted. |

Private Sector

| | | |
|--|---|---|
| Future tourism, and other major commercial development is controlled within the Development Review Process. It is recommended that the use of Environmental Impact Assessments be continued as a pre-requisite for all major development projects. | ✓ | Generally being applied. |
| Through the Development Review Process, it is recommended that no commercial development be permitted in high risk coastal hazard areas (and certainly not within 100 feet of the coastline or on land that could potentially flood). | ✘ | A number of Laundromats have been permitted on reclaimed areas over the shoreline |
| The risk to develop land with any coastal hazard risk for commercial purposes, must be borne by the Developer. It is recommended that, at the project review stage, it is made clear to the Developer that the construction of coastal defences will not be permitted during the lifetime of the development to protect the development from storm damage or flooding where no coastal defences currently exist. | ✓ | Generally being applied. |
| It is recommended that the Development Review Process ensures that appropriate technology be utilized to ensure that effluent discharge to the fresh water or marine environment from any proposed commercial development has minimal detrimental or cumulative impact. | ✓ | Generally being applied. |

Coastal defences

| | | |
|---|---|---|
| The construction of engineered sea walls or other forms of coastal defence, such as breakwaters (wave breakers) are not an appropriate coastal management, or cost effective solution, for reducing the risks posed by coastal erosion, flooding and storms around much of the coastline of Kosrae. | ✘ | Ad hoc seawall structures still being built and viewed as the preferred solution. |
| Construction or upgrading of coastal defences in locations where such an approach is the most effective long-term strategy for the protection of infrastructure or property. | = | Some upgrading of defences has occurred (e.g., at Leyot). |

Appendix B

An overview of coastal
change on Kosrae



Types of coastline

Kosrae has a varied coastline the current characteristics of which depends on the width of the reef flat and the relative exposure to tradewind waves and occasional, severe, storm or typhoon waves (Figure B 1). These characteristics have also defined how development has occurred, how vulnerable parts of the coastline are to inundation events, and how the shoreline has changed and will continue to change in the future.

Beach berm

This is a dominantly sandy coast found along the north facing Tafunsak and Walung coastlines that are moderately exposed to tradewind-related waves, and along the northern part of Lelu Lagoon (between Putuke to Finpukal).

It is characterised by a wide reef flat with seagrass beds, narrow wave built sand berm upon which the coastal road and most development has occurred, with low lying infill swamp or farmland behind the berm to the volcanic part of the island. At Walung, and between Putuke and Finpukal, mangrove occurs between the narrow beach berm and the volcanic uplands (Figure B 2).

The beach sediments along the Tafunsak and Walung coasts are dominated by reef-flat derived foraminiferal tests and other reef and reef flat derived biogenic fragments (corals, algae, gastropods and bivalves). Beach sediment generated upon the reef flat continues to be an important source of sediment to these beach systems.

Along the north coast the beach berm has developed from the supply of dominantly reef-flat derived sediments, a trade-wind wave induced net longshore transport of beach sediment to the west, and the shape of the outer fringing reef, which

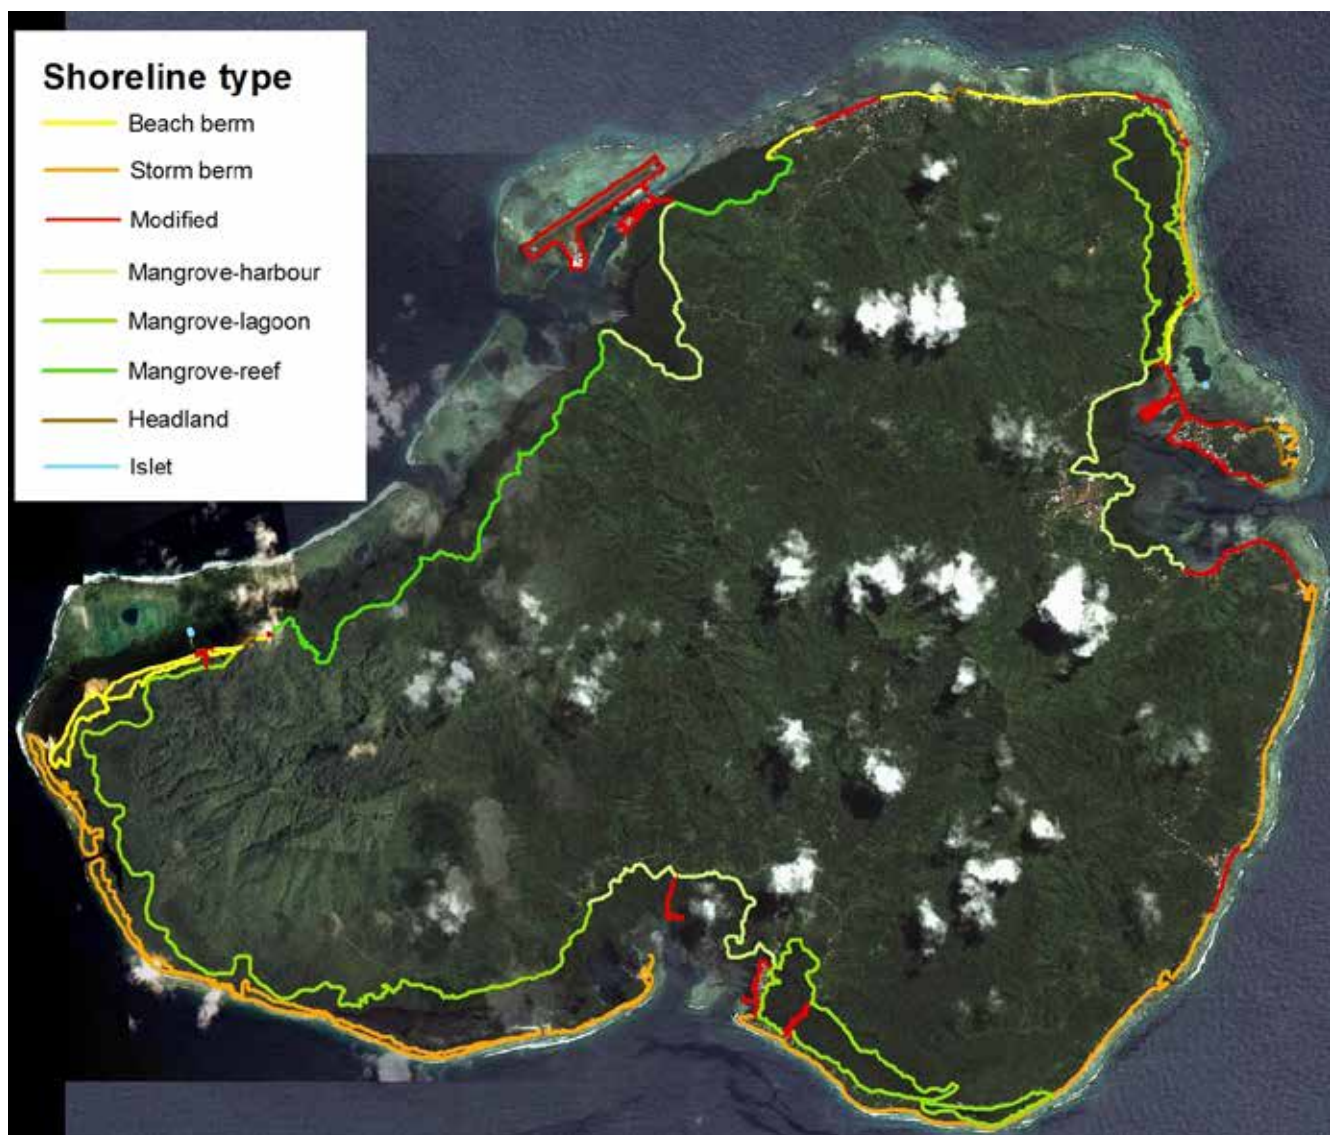


Figure B 1: Basic shoreline types on Kosrae.

Appendix B

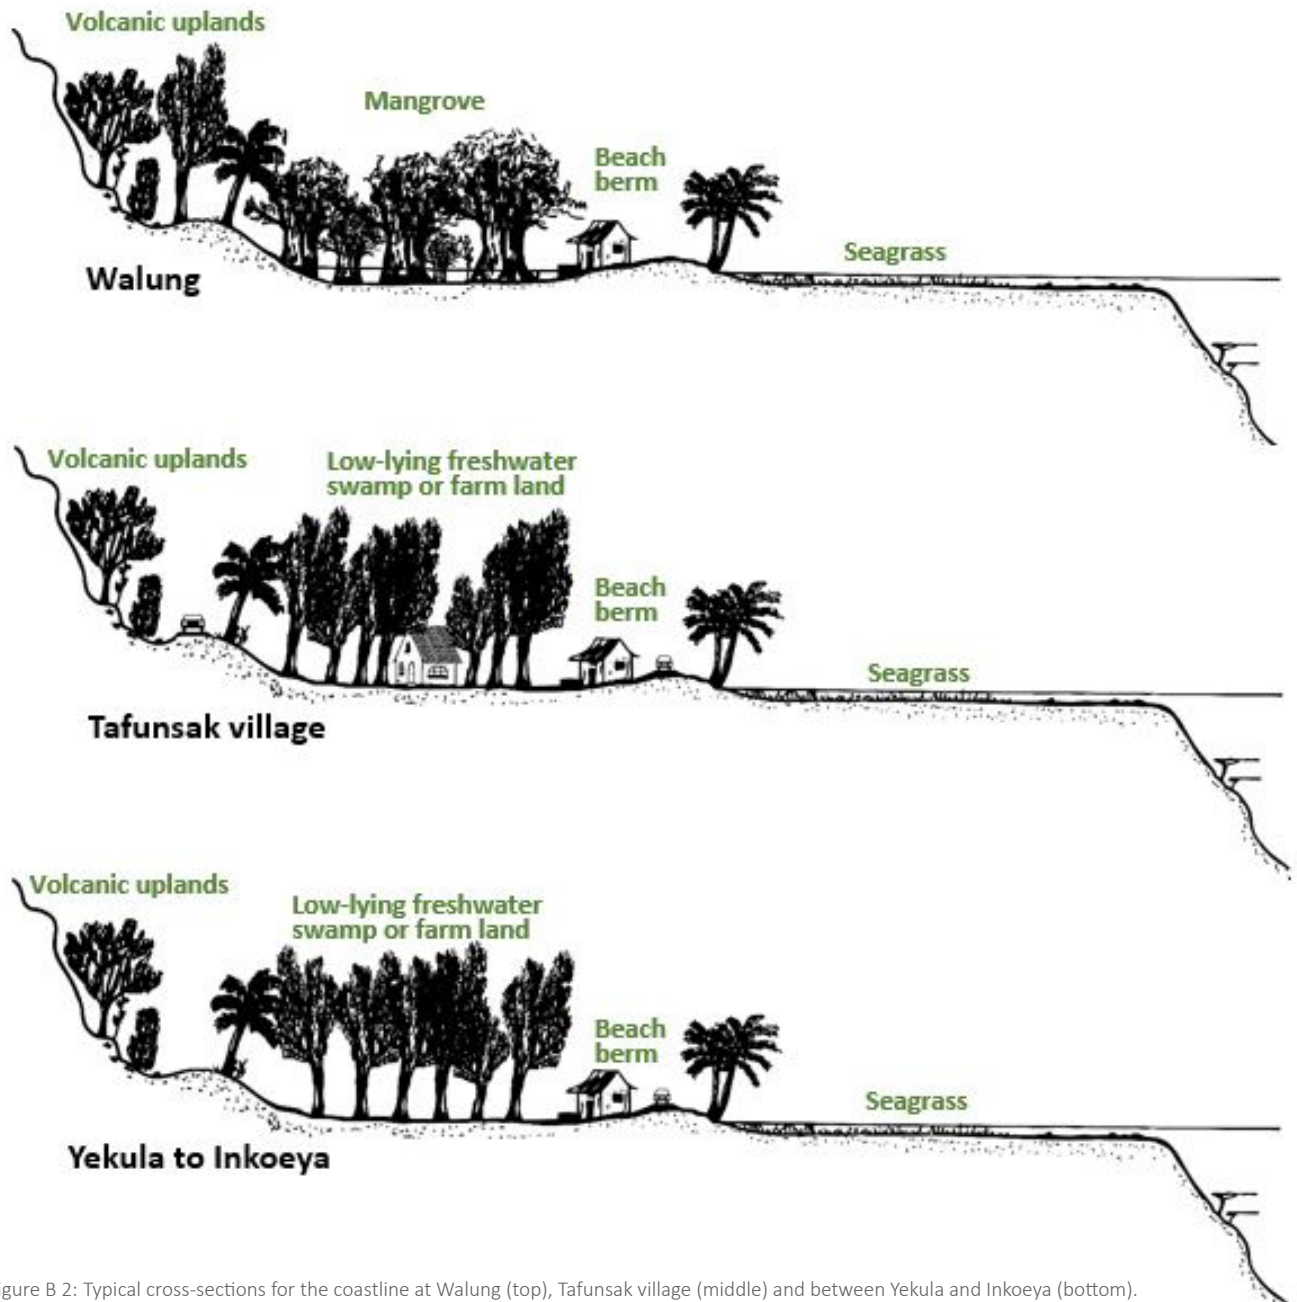


Figure B 2: Typical cross-sections for the coastline at Walung (top), Tafunsak village (middle) and between Yekula and Inkoeya (bottom).



Figure B 3: Key sediment sources, longshore transport processes, and sediment losses along the Tafunsak shoreline.

influences the way waves propagate to the shoreline over the reef (Figure B 3 to Figure B 5). The elevation of the beach berm is also strongly related to wave exposure and tends to be higher along the Tafunsak coastline and relatively lower at Walung and the northern part of Lelu Lagoon.

Key coastal process features along the Tafunsak coastline include:

- Primary sediment sources are from the sediments generated over the wide reef flat areas along this north-facing coast and transported by waves onshore. Sediment is also generated and trapped within the extensive seagrass beds occurring along the inner to mid-part of the reef flat. This raises the level over the reef flat and helps stabilise the shoreline from wave-induced change.
- Another important source of sediment to this coastline is from longshore transport from the Finaunpes region as the large salient that built up at Finaunpes due to protection provided by past banks of coral rubble on the outer reef flat has retreated landward (see coastal change figures later in this Appendix). This has resulted in a general build-up of land from Inkoyea to Sialat over at least the last fifty years.

- At Finfukal the shape of the outer reef and shallow channel influence the way waves approach this part of the shoreline causing beach sediment to be moved away from the beach at Finfukal (drift divide). This has resulted in ongoing retreat of this short section of coast requiring a rock armour revetment to protect the road.
- At Wiya and Finfokoa the position of the coastline has moved little when comparing the position of the coast between 1944 and the present (see section below). Occasional cut down of the beach does occur during large wave events, particularly at Finfokoa with the issue along both these areas being the proximity of the coastal road right on top of the beach crest, rather than any retreat of the shoreline.
- The dredge pits at Tafunsak have been, and may well continue to be a sink of both beach and reef flat sediments.
- The net westerly longshore transport of beach sediment means that downdrift erosion problems (such as occurred at Sandy Beach and to a lesser extent at the western end of the Tafunsak seawall) are likely where poorly considered seawalls or reclamation is conducted.



Figure B 4: Key sediment sources, longshore transport processes, and sediment losses along the Walung shoreline.

Appendix B

Key coastal process features along the Walung coastline include:

- Again the reef flat will have been the primary sediment sources for sediments forming the beach berm between Insiat and Koasr, and for the beach at Mwot which is separated by a rock headland. However, due to the relatively much more sheltered wave environment, present day sediment movements from the reef flat to the shoreline are likely to be relatively modest.
- Between Insiat and Leap, this lack of sediment entering the beach system is one of the causes for the erosion occurring along this section. However, this has been significantly exacerbated by two activities: 1) the cutting of the drainage channel at Leap in the 1970s, and 2) the removal of sediment from the beach for building construction.
- Between Leap and the entrance to the channel between Koasr and Saoksa the position of the shoreline between 1944 and the present day has been relatively stable (see Section below), with some slight changes at the mouth of Infal Panyea and on the eastern flank of the Utwe-Walung channel entrance both associated with the general westerly longshore transport of beach sediment.
- The net westerly longshore transport of beach sediment means that downdrift erosion problems are likely where poorly considered seawalls or reclamation is conducted. This occurred at Leap after the opening of the channel



Figure B 5: Key sediment sources, longshore transport processes, and sediment losses along the Putukte to Finpukal shoreline.

and construction of the seawall in the 1970s (Xue, 1996) and would have occurred with the construction of the new seawall associated with the road extension at Insiat. However the western end of the seawall was terminated at a large Ituc tree (*Calophyllum inophyllum*) the roots of which have extended over the beach over many years acting as a groyne which has held the position of the shoreline to the east but resulted in downdrift erosion to the west of the tree.

Key coastal process features along the Putukte to Finpukal coastline include:

- Historically, the majority of sediment that has formed the beach berm between Putukte and the Mutunnenea channel will have been transported southwards along the Pukusruk shoreline into the northern part of Lelu lagoon. However, present day transport of beach sediment from the Pukusruk shoreline is now extremely low.
- The effect of mangroves in trapping sediment and building

up the beach can be seen along the central section of the shoreline.

- Changes in position of the shoreline between 1944 and the present day has shown relatively little movement (see Section below). At Putukte the cut back of the beach, resulting in the concrete mattress protection in front of the Treelodge Hotel is typically where there is a net south-westerly net movement of sediment towards Finpukal but with little new sediment being transported around the corner from the Pukusruk shoreline.

Storm berm

Much of the east and south coastline on Kosrae has been built by storm and typhoon events over many years. The east coast is characterised by relatively narrow fringing reef, a narrow storm berm upon which the coastal road and most development has occurred, with areas of low lying infill swamp, farmland or lagoon mangrove, behind the berm to the volcanic part of the island (Figure B 6 and Figure B 7).

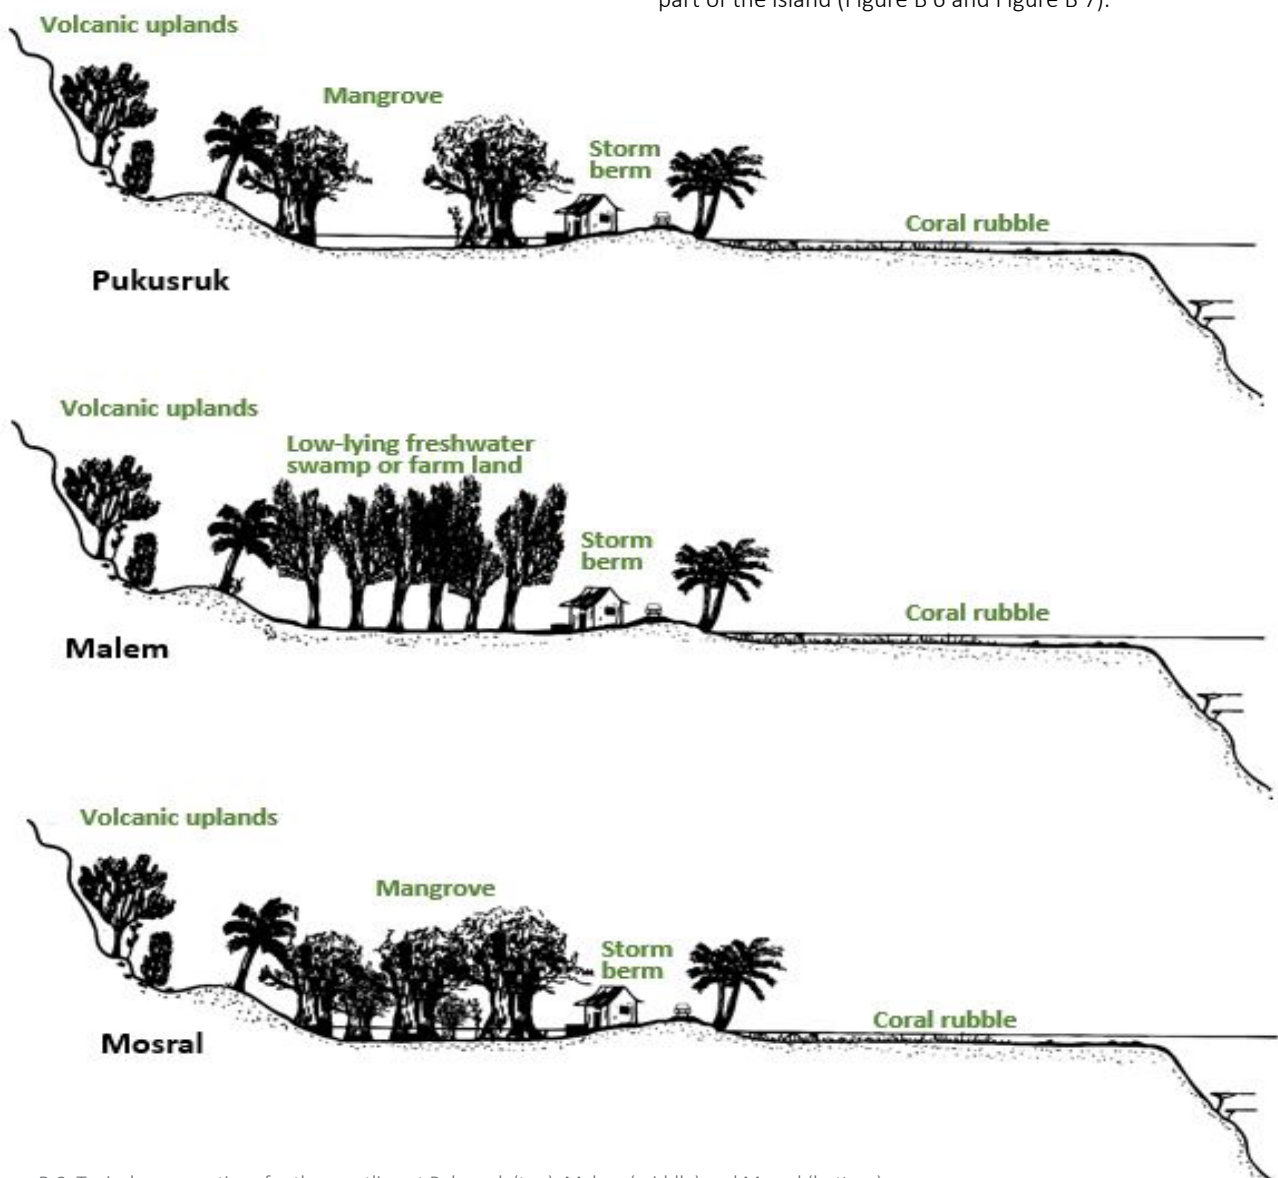


Figure B 6: Typical cross-sections for the coastline at Pukusruk (top), Malem (middle) and Mosral (bottom).

Appendix B

The storm berm probably began to form some 2500 to 3000 years before present when the post-glacial rate of sea level rise slowed and relative sea level reached its present level (there is little evidence of sea-level high stand and subsequent fall in sea level at this time on Kosrae). Along the eastern facing Lelu and Malem exposed coastline, this storm berm will have formed due to many storm/typhoon events depositing coral rubble and sediment on the reef flat. Over time wave action moves this coral rubble and sediment landwards which “feeds” and

builds up the storm berm (Figure B 8). The height of the storm berm is also closely related to the incident wave conditions experienced along the shoreline.

On the leeward south coast from Kuplu all the way to Saoksa in Walung the storm berm will have formed from much more infrequent but severe typhoon events which results in larger blocks of coral being deposited (as can be seen along the coastline at Kuplu). At Kuplu, there are a number of historic

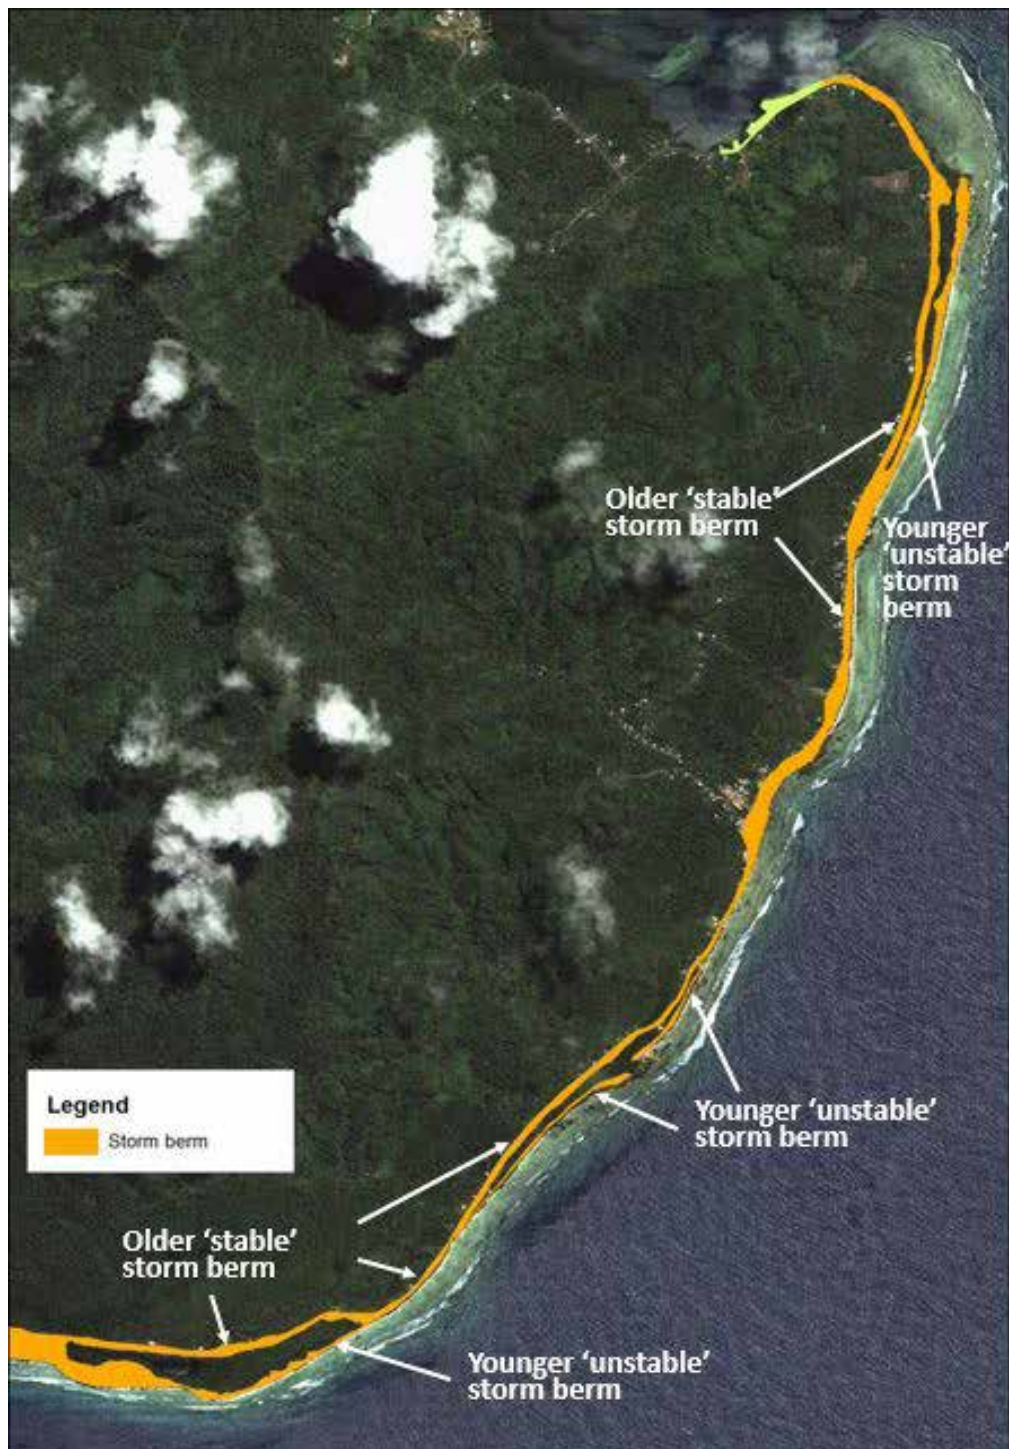


Figure B 7: Location of the storm berm along the Malem coast.

storm berms evident (which have formed the lake at Infulu Kuplu) but between Uwte Ma and Saoksa the storm berm is narrow and formed close to the edge of the reef (reflecting the generally mild wave climate with the very occasional storm or typhoon event).

To understand why coastal changes are occurring, particularly along the eastern facing Lelu and Malem shorelines, it is necessary to look back to the end of the 19th century. Kosrae is rarely affected by cyclone events, with the main tracks located to the north and west of the island (see Appendix C). The last major cyclone was in 1905 but it was a cyclone in 1891 that resulted in a bank of coral rubble being deposited on to the reef flat along much of the eastern coastline. In places it was so high that the breaking waves could not be seen.

This bank of coral rubble acted as a breakwater blocking a substantial amount of the incident wave energy that would have normally reached the shoreline. This sheltered environment in the lee of the rubble rampart enabled the shoreline to gradually build out and fringing reef mangrove strands to develop at the mouths of streams over much of the early to mid-part of the last century. Over the subsequent decades these rubble banks gradually broke down but continued to provide a substantial level of protection to the eastern shoreline (Figure B 9).

However, it was in the decades after World War II when considerable development commenced, including the circumferential road, and the widening of a causeway. These projects utilised large amounts of coral rubble sourced from

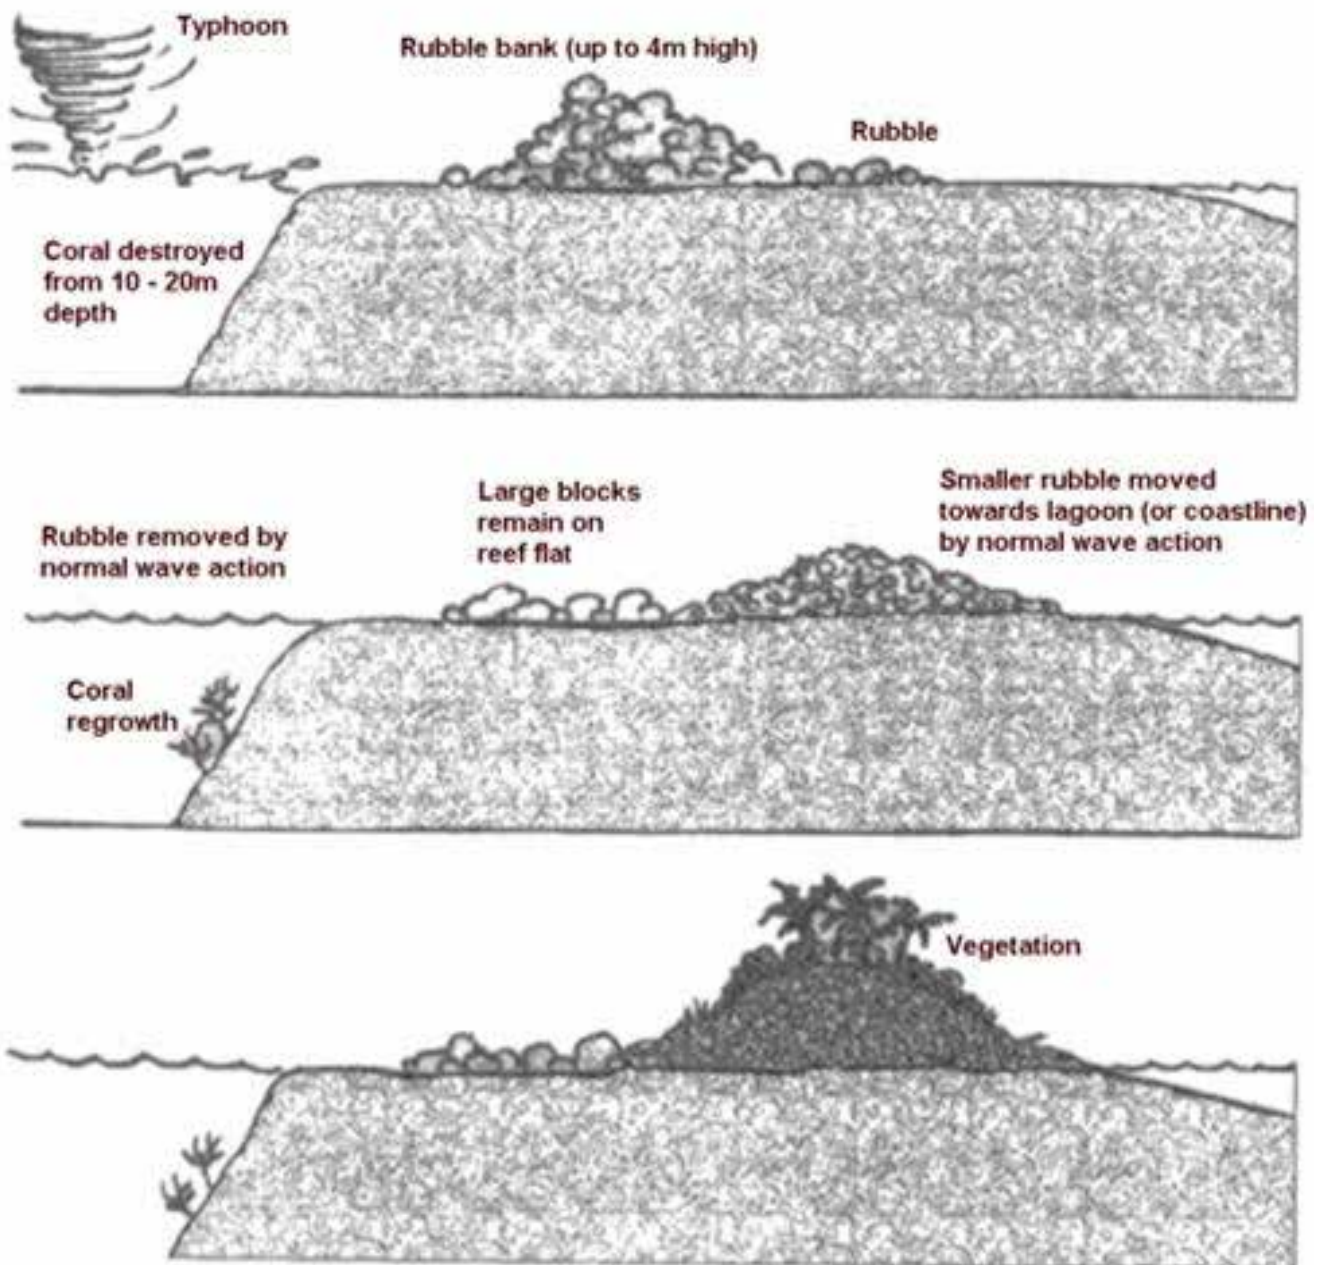


Figure B 8: Basic process forming the storm berm along the eastern facing Lelu and Malem shorelines and southern coastline of Utwe.

Appendix B



Figure B 9: Aerial photograph of the north-east Kosrae coast in 1944 (top) and the remnants of the rubble ridge in 2013 at Putukte (bottom). The rubble ridge extending from Finaunpes all the way down the Pukusruk shoreline to Putukte can be clearly seen in 1944. The size of the ridge between Finaunpes and Finfokoa resulted in a build out of the shoreline in a bulge in the lee of the ridge. With the breakdown/removal of the rubble ridge, the sediment in this bulge in the shoreline has been redistributed along the adjacent coastline (see shoreline position comparisons in the section below).

these banks. The removal of such a large amount of rubble from the banks both accelerated the breakdown and shoreward migration of the remaining coral rubble but also substantially reduced the protection provided to the shoreline. The increase in wave energy reaching the shoreline has subsequently resulted in a loss of the fringing mangroves along the Malem coastline and long-term and on-going readjustment of the shoreline along much of the eastern coastline with much higher rates of erosion than has been occurring on any of the other shorelines around Kosrae.

The tradewinds and resulting waves also result in coral rubble and beach sediments being moved in a net southwards direction along much of the east coast. Along the Pukusruk coast (Figure B 10):

- Sediment tends to move away from the Finfokoa area moved alongshore both to the north and to the south. However, the rate of longshore transport, particularly to the south will be presently relatively small.

- Along the Pukusruk coast there are a couple of small, very shallow channels through the outer reef (Figure B 10). These may be locations in the past where part of the Mutunnenea channel drained through and are locations where some beach/reef flat sediment will be lost offshore.
- Changes in position of the shoreline between 1944 and the present day has shown relatively little movement (see Section below) for much of the Pukusruk shoreline south of Finfokoa. The most notable retreat is occurring at the locations of the two shallow channels which may allow greater wave energy to reach the shoreline.

Along the Malem coastline (Figure B 11):

- The net southerly longshore transport can be observed by the build-up of beach sediment to the north of the old Japanese blockhouse and subsequent downdrift erosion



Figure B 10: Key sediment sources, longshore transport processes, and sediment losses along the Pukusruk shoreline.

to the south at the house of Chris Collin's in Pilyuul and similarly at the position of the Tideflex outlet at the Mosral River mouth.

- The increased wave energy reaching the shoreline and resulting southward longshore transport also result the mouths of some of the smaller rivers being blocked.
- The reef flat channels at Malem, and Pilyuul are locations where beach / reef flat sediment will be lost offshore. The locations of these channels are also where erosion problems tended to most significant, notably at Malem. However, continued retreat of the shoreline at Pilyuul will increasingly expose the road.

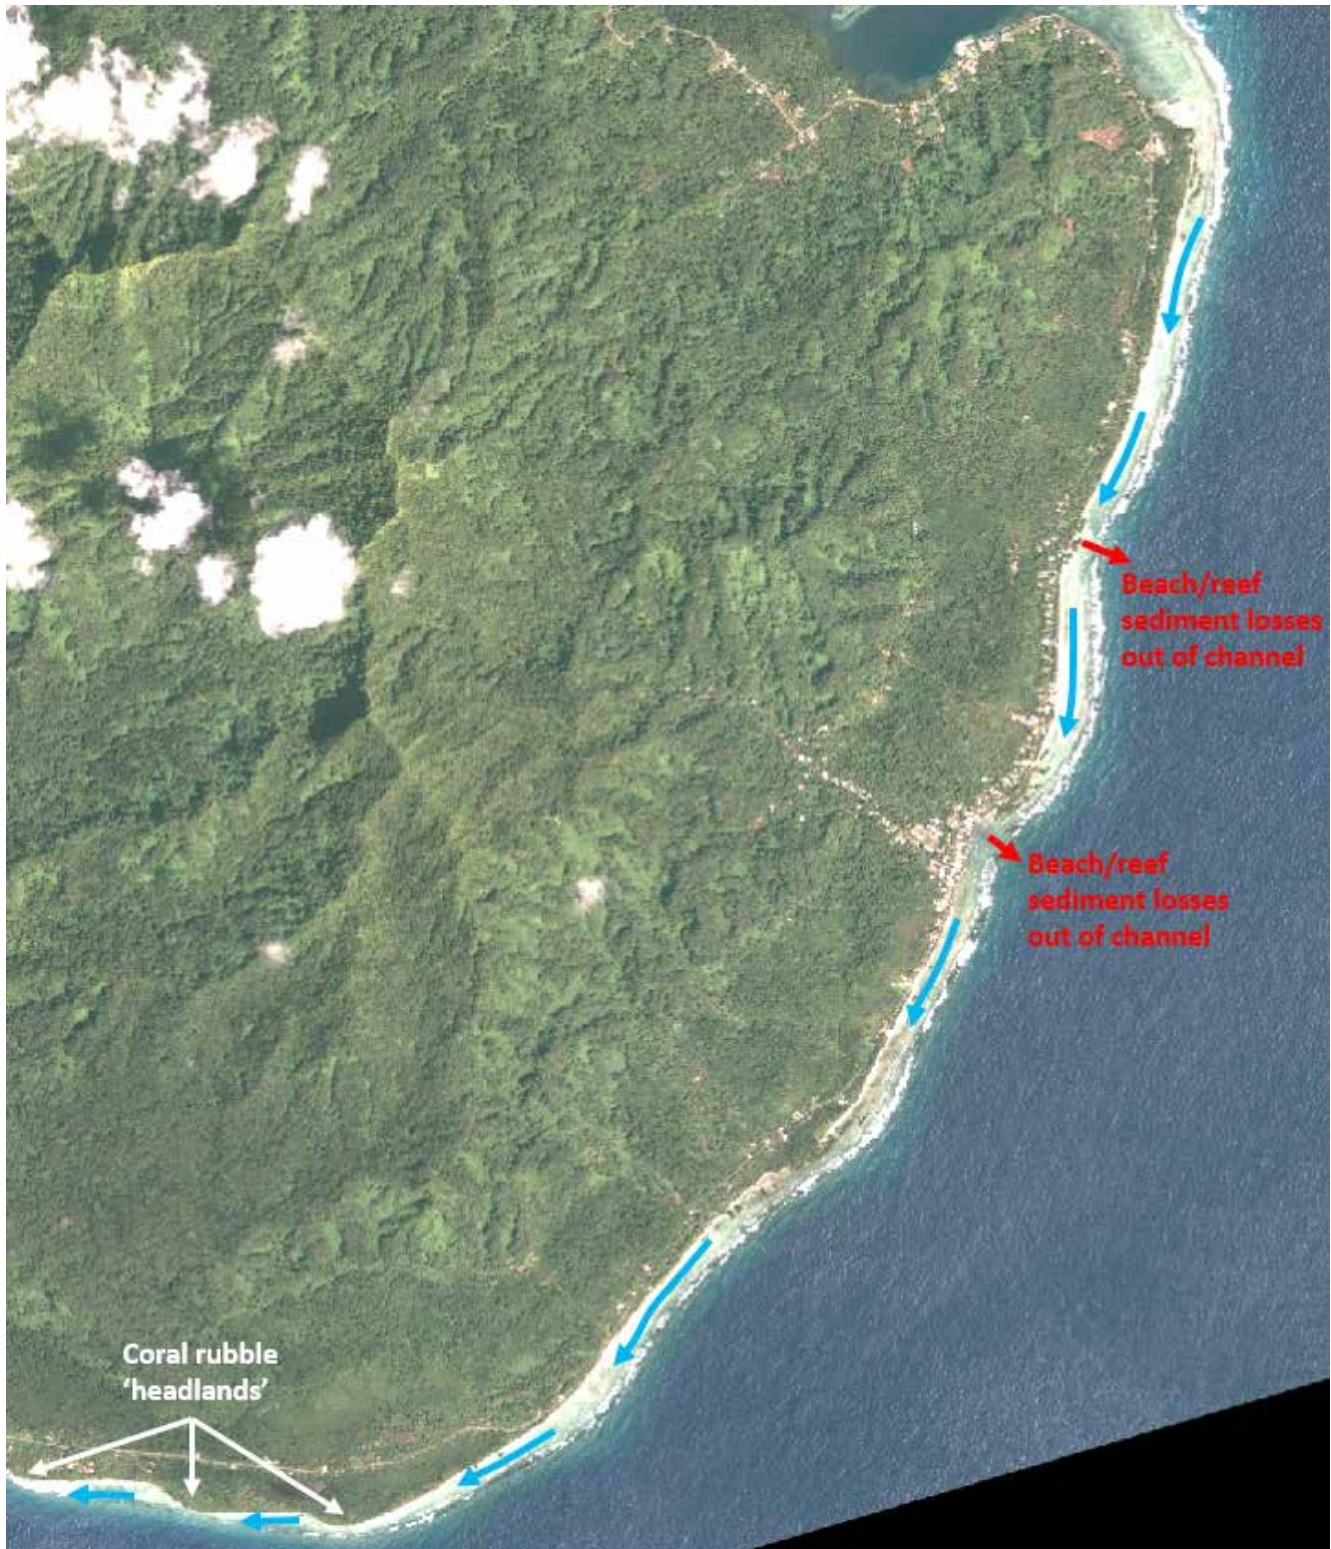


Figure B 11: Key sediment sources, longshore transport processes, and sediment losses along the Malem shoreline.

Appendix B

- The Kuplu area has been an area of sediment deposition with some significant changes apparent between 1944 and the present day (see section below) including the closing of the eastern outlet of Infulu Kuplu.

Along the south coast, from Kuplu to Utwe, sediment tends to be moved westwards. However, deposits of large coral boulders on the reef flat tends to create a series of headlands and bays with the shoreline rotated to face the incident wave direction and longshore transport rate is likely to be low.

Mangrove coastlines

Mangroves only provide coastal protection along relatively sheltered coastlines, i.e., those that experience low wave energy. Mangrove areas on Kosrae provide direct coastal protection for about 22% of the coastline and are also an important component of the overall natural coastal defences where they are located in back lagoon settings (but do not provide direct coastal protection to ocean waves). There are three basic mangrove settings (Figure B 12) on Kosrae:

- Reef flat mangroves: The mangroves along the coastline between Tafunsak and Mwot is the only significant strand that provides protection on a reef flat location, albeit one that is relatively sheltered from typical tradewind wave conditions.

- Harbour mangroves: Located around the fringes of Okat, Lelu and Utwe where some ocean wave energy can be experienced but predominantly local wind-waves generated within the harbours.
- Lagoon mangroves located behind storm or beach berms, for example Mutunnenea, between Utwe and Mosral and between Utwe Ma to Walung which are largely sheltered from any wave action.

The effectiveness of mangroves in providing shoreline protection is highly context specific, depending on the geomorphology of the area and the frequency and magnitude of storm events that have the potential to cause shoreline change, the width, age, density and structure of the mangrove strand.

The narrow strands of mangroves that previously occurred on the outer coastlines, such as along the Malem coastline, provided little effective coastal protection from wave and storm conditions. Mangroves only developed along coastlines such as Malem, due to the protection from waves provided by the coral rubble banks that were previously located on the outer part of the reef flat. The loss of mangroves from these more exposed coastlines is related to the loss of the rubble banks and has not been a dominant cause of the erosion along these sections of coastline.



Figure B 12: Key mangrove settings on Kosrae. Top left: reef flat mangroves between Okat and Yela; Bottom left: Fringing harbour mangroves in Lelu Harbour at Tofol; Right: Back lagoon mangroves between Nefalil and Utwe Ma.

Modified or man-made coastlines

A substantial amount of Kosrae's development and infrastructure is located on land that has been modified by reclamation or engineered structures:

- Reclaimed areas upon which development is located, for example the main part of Lelu village on Lelu Island, the area upon which Utwe village is located and the airport and port infrastructure at Okat.
- Seawall or revetment structures built to protect land or development, such as at Tafunsak and Malem.

All these modified areas tend to be fronted by form of engineering structures resulting in natural coastal change limited, except where such structures have been poorly built or maintained. If a severe typhoon or storm were to occur many of these defences would not provide adequate protection and significant wave overtopping damage would be expected. The most significant changes are where poorly designed structures have exacerbated erosion on adjacent sections of coastline, for example at Sandy Beach Hotel in the 1980s and 1990s.

Assessment of coastal change between 1944 and 2011

Introduction

An assessment of the change in shoreline position between aerial photographs collected in 1944 and a Quickbird high resolution satellite image collected in 2012. After an initial assessment of the resolution of the scanned 1944 aerial images it was decided that these would need to be scanned at a higher resolution. Copies of the original prints are held at the US Forestry Service Institute of Tropical Forestry in Hilo, Hawaii with rescanning of the prints at 1200 dpi kindly conducted by Mr Thomas Cole.

A total of 21 of the 1944 scanned aerial images were georeferenced and rectified against the 2012 satellite image using Erdas Imagine 2013 software. For each scanned print over one hundred matching control points between the 1944 image and the 2012 satellite image were identified and used to rectify the 1944 aerial photographs. The process was repeated until error was reduced to the minimum possible however this varied depending on the quality of imagery, cloud cover and reliability of control points.


Once all images had been rectified the shoreline (terrestrial vegetation line, not mangroves) was digitised for both the 1944 and 2012 images and the shorelines compared. The quality of the 1944 imagery was not sufficient to assess quantitatively shoreline positional change but general gross patterns of change were reliably observed.

The Figures below show the general shoreline changes between 1944 and 2012 around coastline of Kosrae:

- The image on the left shows the rectified 1944 aerial image with the digitised 2012 shoreline (red line). Where:
 - The red line is seaward of the shoreline shown in the 1944 aerial image, the coastline has built out (accreted) between 1944 and 2012.
 - The red line is landward of the shoreline shown in the 1944 aerial image, the coastline has eroded between 1944 and 2012.
- The right hand image shows the 2012 satellite image with the 1944 digitised shoreline (orange line). Where:
 - The orange line is seaward of the shoreline shown in the 2012 satellite image, the coastline has eroded between 1944 and 2012.
 - The orange line is landward of the shoreline shown in the 2012 satellite image, the coastline has built out (accreted) between 1944 and 2012.

Appendix B

Lelu: Finfokoa to Finpukal

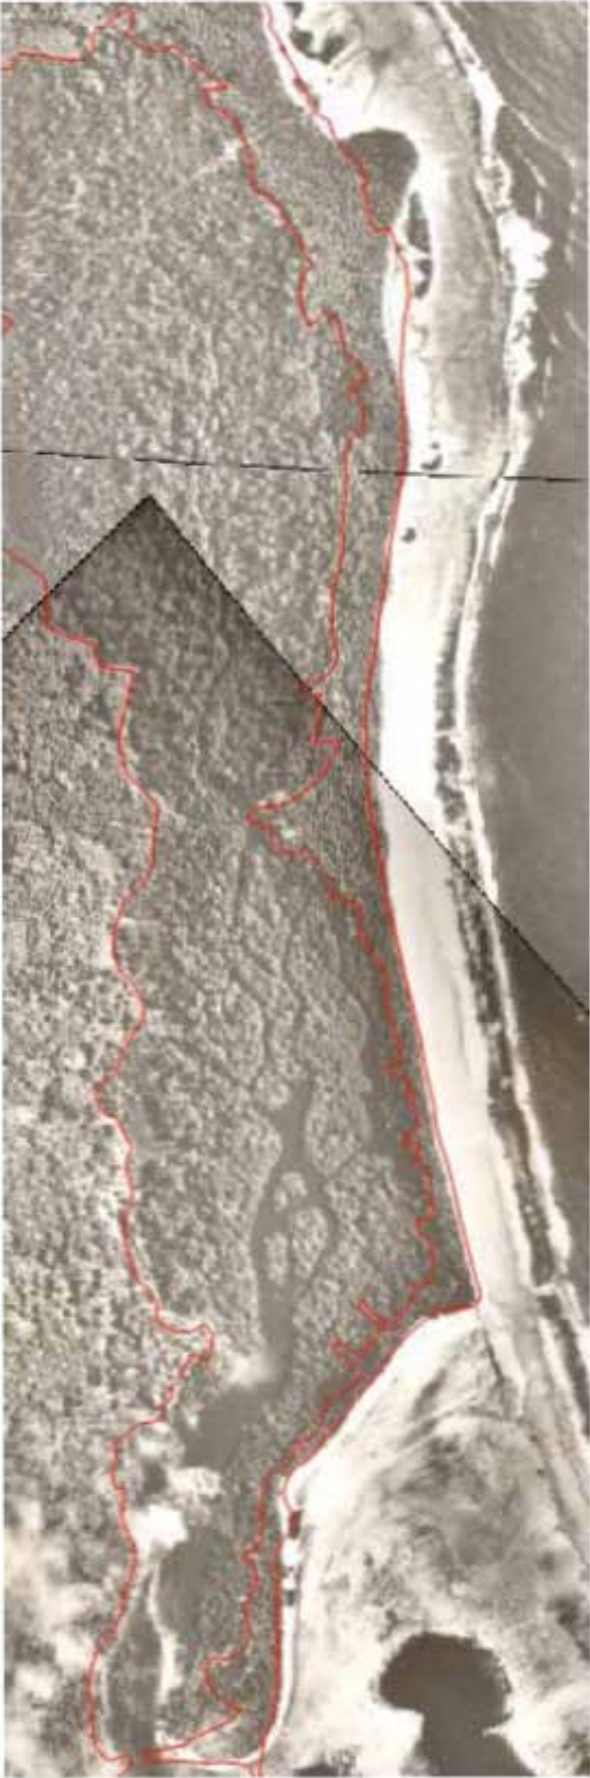

Lelu: Lelu Island and Tofol




Appendix B

Lelu: Tafuyat to Pilyuul



Malem: Yewak to Yeseng

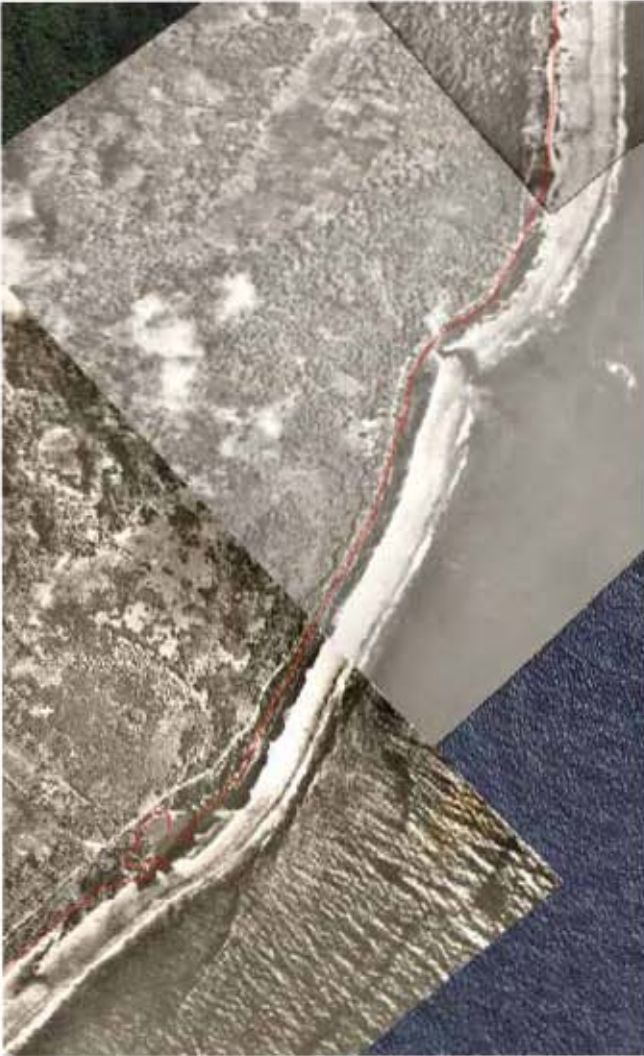


Appendix B

Malem: Mosral to Kuplu




Utwe: Kuplu to Utwe Ma

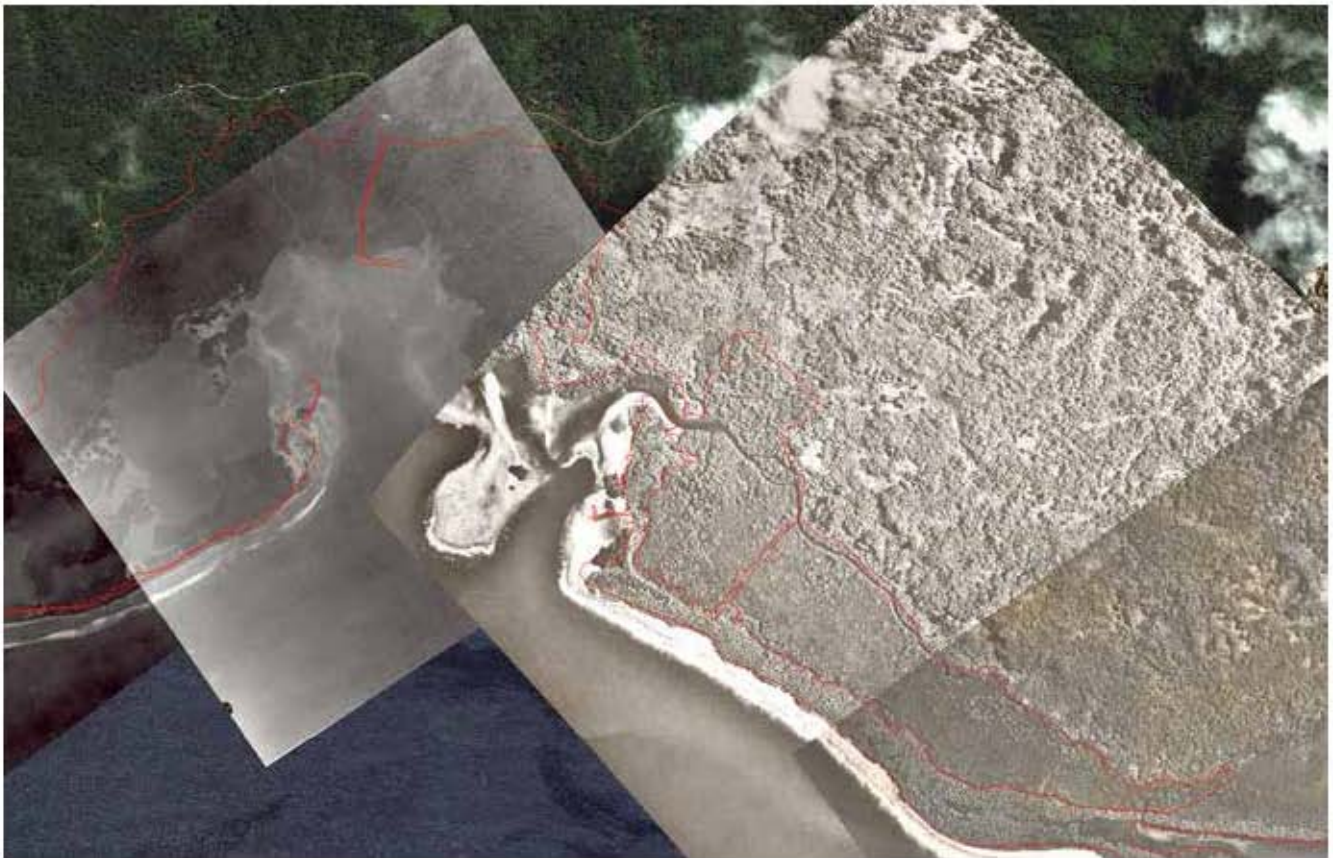


Appendix B

Utwe: Utwe Ma to Tukunsru

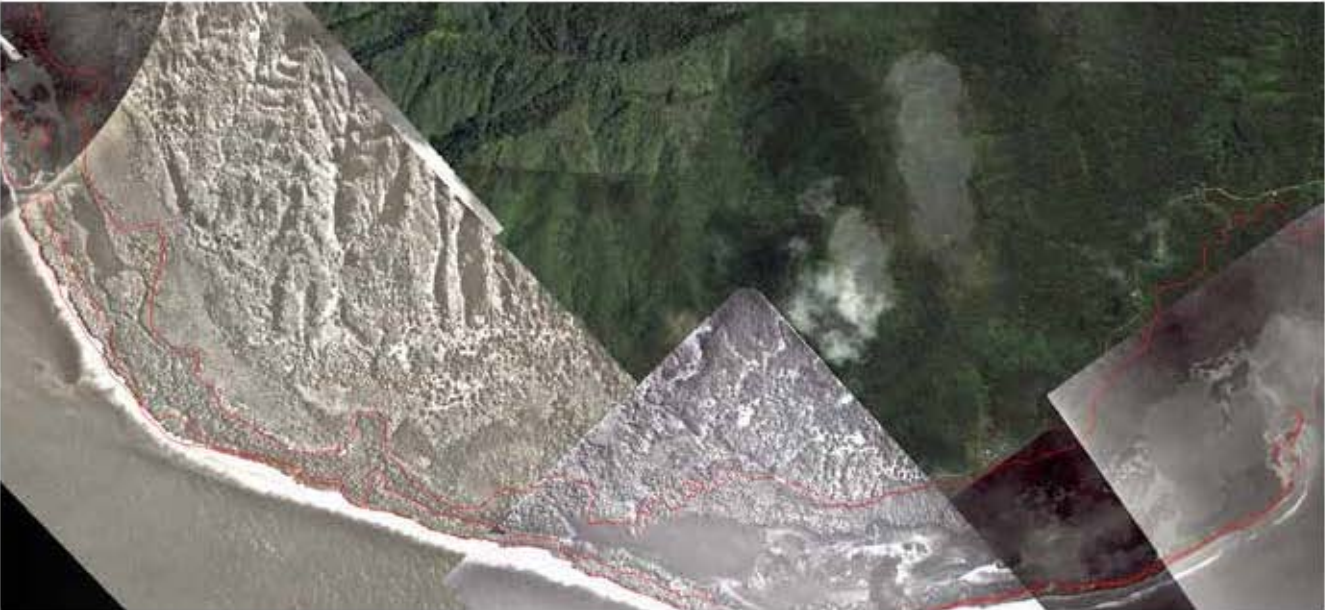


Walung: Tukunsru to Mwot

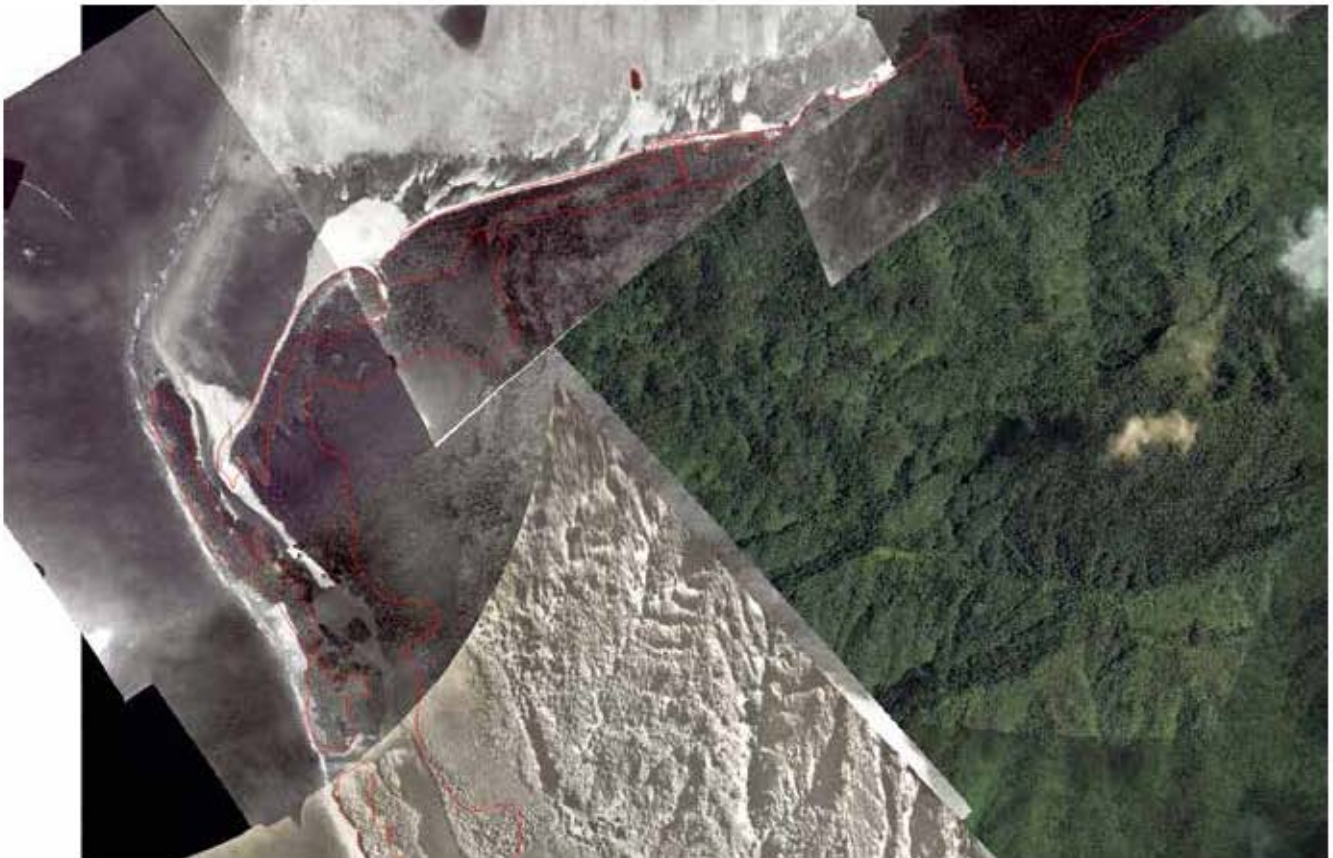

Appendix B

Tafunsak: Okat

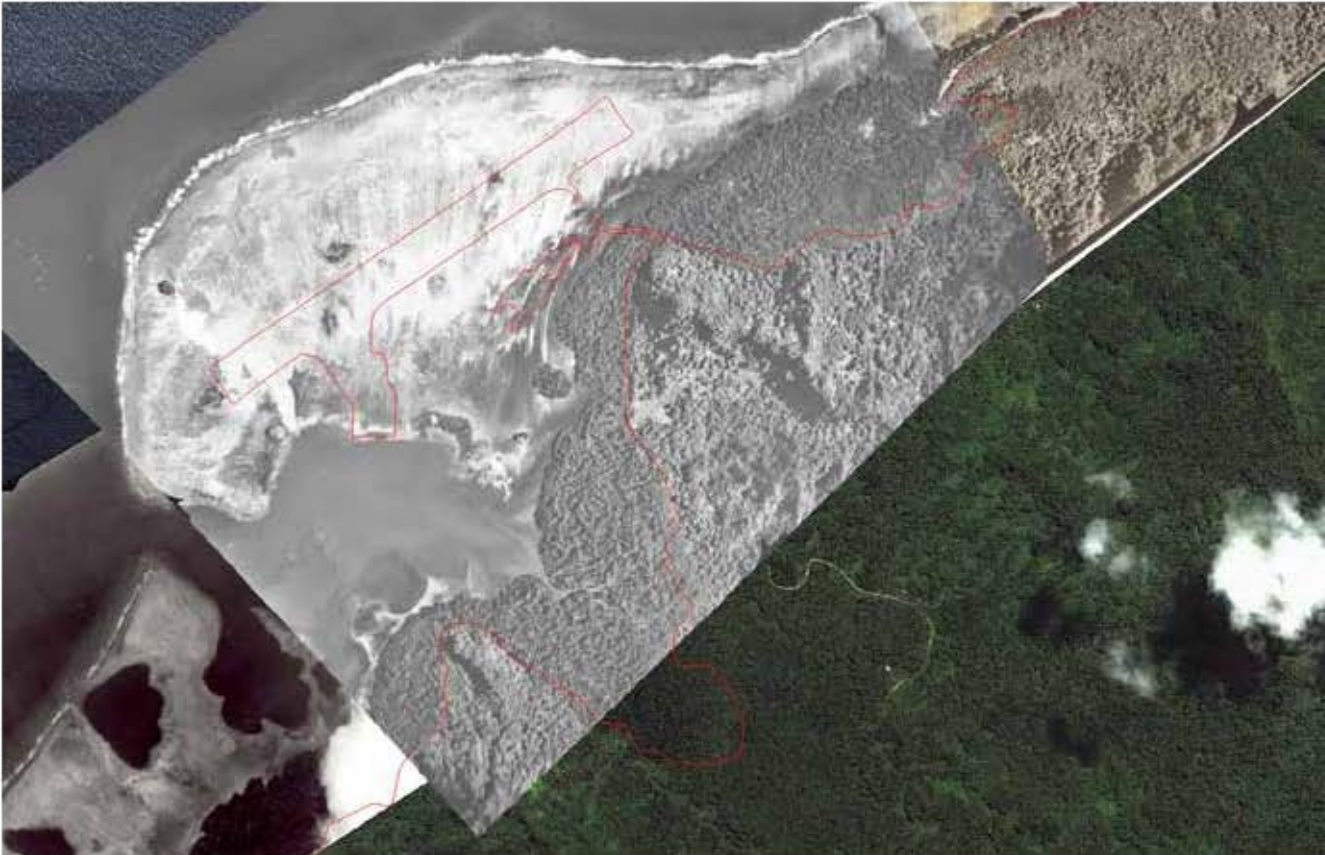


Tafunsak: Tafunsak to Finaunpes



Appendix C

An overview of coastal
inundation on Kosrae

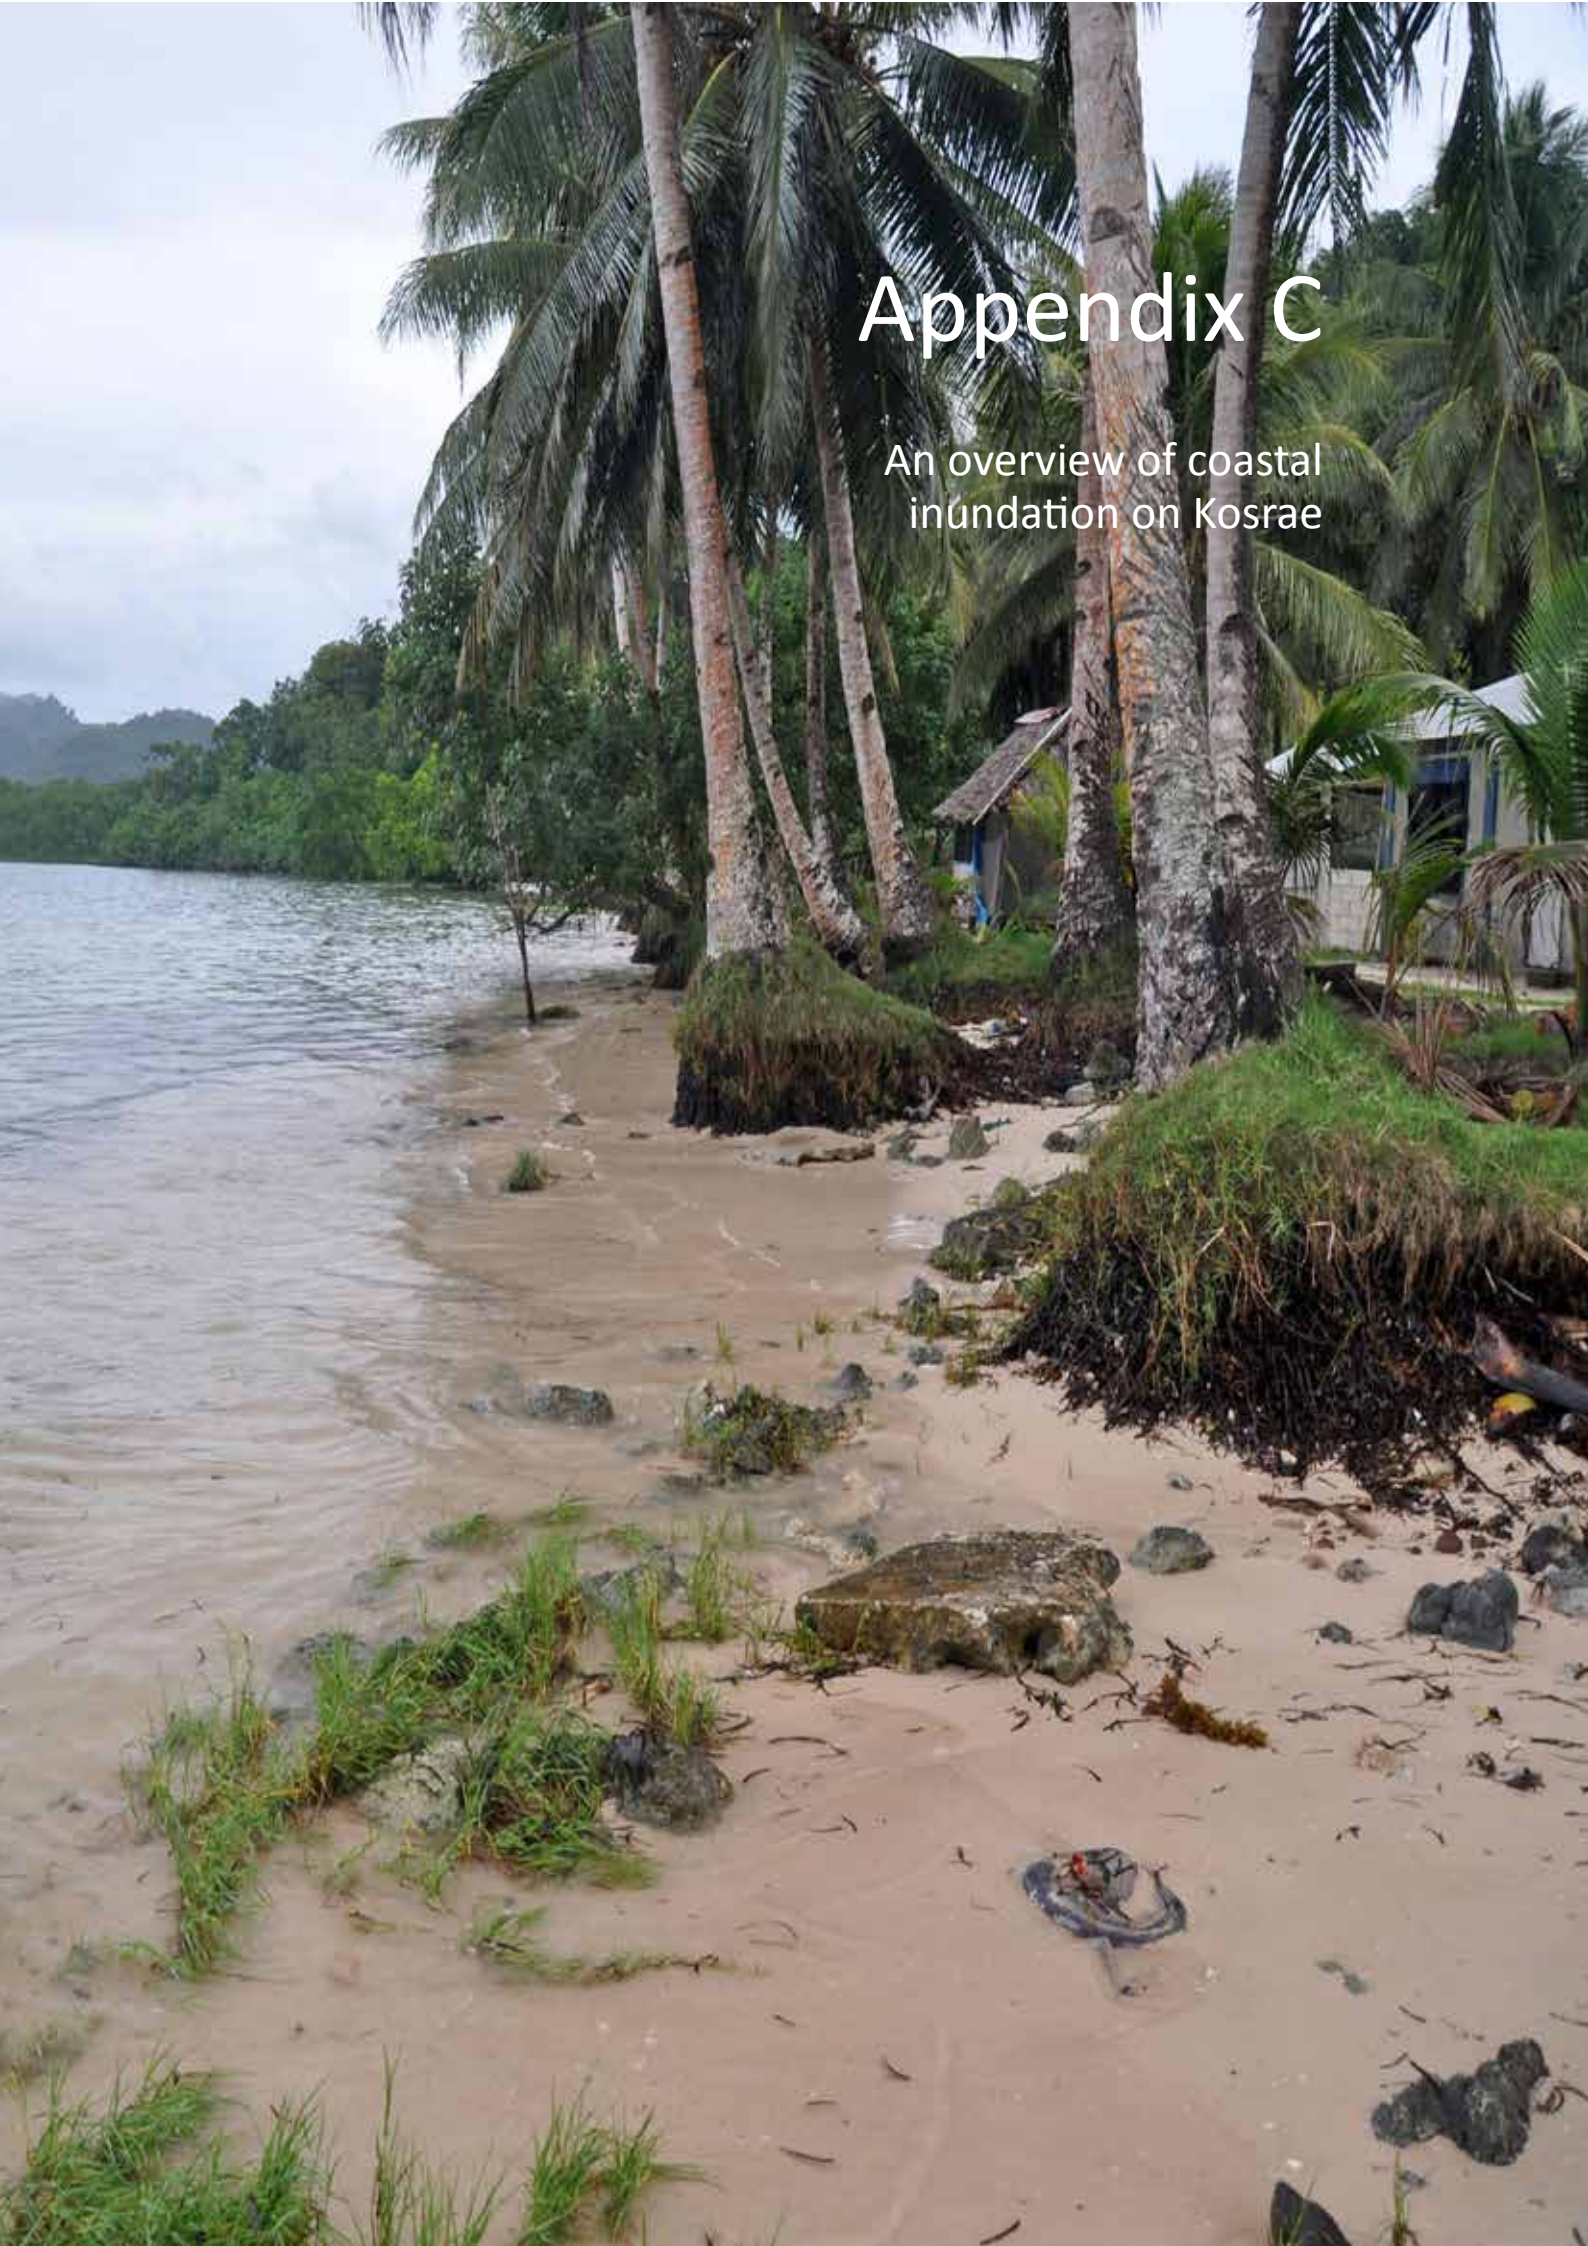

Flooding of land from the sea on Kosrae tends to occur episodically due to three types of event, Table C 1. Further information on sea-level components, variability and change on Kosrae are provided in Appendix D.

Table C 1: Current and foreseeable future requirements and priorities for transitional coastal defences.

| Inundation event | Indicative frequency of occurrence |
|--|--|
| Higher than normal high tide levels. | <ul style="list-style-type: none"> • Every year: <ul style="list-style-type: none"> – Particularly between December and February. – Much higher than normal every 2 to 4 years during period of La Niña. |
| Large swell waves caused by distant storms in the north Pacific. | <ul style="list-style-type: none"> • Once in a generation. |
| Typhoon events that track close to Kosrae. | <ul style="list-style-type: none"> • Once in a lifetime: <ul style="list-style-type: none"> – the last cyclone to directly impact Kosrae was in 1905, beyond the living memory of all current residents. |

High (King) tides

Flooding of land on Kosrae most commonly occurs due to higher than normal high tide levels, or high tides occurring at the same time as moderate to large wave conditions. With the exception of storm or typhoon-related flooding events (see next sections) which are rare on Kosrae, coastal flooding tends to most commonly occur:

- Between November and February and June to August.
- During strong phases of La Nina.

This is because high water levels, and hence inundation experienced around Kosrae, tend to occur when a number of components combine:

- The most significant is the astronomical tide – the regular rise and fall of water level due to the influence of the moon and the sun. Tide levels on Kosrae tend to be higher between November and February and between June and August.
- The influence of El Nino and La Nina oscillations. During strong El Nino events, sea levels around Kosrae tend to be depressed. During strong La Nina’s, the opposite occurs and sea levels tend to be higher. This can cause variations in sea-level of up to 0.25 m (10 inches) or more.
- The effect of continuous north-east trade winds which tend to increase tide levels between November and April.

Hence when larger tides, combine with La Nina conditions and north easterly trade winds, as occurred around December/January 1999/2000 (Figure C 1) and November 2007 to February 2008, higher sea-levels occur and inundation and coastal damage is more likely.



Figure C 1: High tide levels at Lelu during December 1999 (left) and Utwe during December 2010 (right).

The main locations where high tides alone cause inundation problems to property or infrastructure tends to be where land has been reclaimed in the harbour areas or within the mangroves sheltered from waves:

- **Lelu Island** – Much of the reclaimed areas on Lelu Island have land levels that are barely above present day high tide levels. Flooding of land during December and January commonly occurs adjacent to the canal sections in Lelu.
- **Pukusruk** – Landward of the road, many properties are built on reclaimed land in to the mangrove with levels barely above high tides.
- **Utwe village** – Much of Utwe village lies on reclaimed land on top of a sand spit. Again the level of the land is barely above present day high tide levels.
- **Walung** – The section of coast between Insiaf and Pilyuul (old elementary school) is largely sheltered from waves with the level of the coastal berm barely above high tide levels.
- **Tafunsak** – The communities at Malsu, Yekula, Finfukul and Sialat that are located on land that is lower than the crest of the beach berm / coastal road, and overwashing of the seawall at Finfukul on to the road.



Figure C 2: Wave overwashing at Fukrin in Malem during February 2000 (left) and high tide wave overtopping of the seawall at Malem village during December 2010).

On the open, generally eastern-facing, coastlines of Lelu and Malem Municipalities, high tides and tradewind generated waves combine to cause overwashing of the coastal berm. This is where larger waves reach the shoreline due to deeper water depths over the reef flat, run-up the beach or seawall and overwash the coastal berm behind the beach.

The height of the coastal berm along this eastern coast is generally related to the height of waves experienced along it:

- Along the Pukusruk coast (Finaupes to Sroanef) and from Tenwak to Malem, the coastal berm tends to be higher and wave overtopping less of an issue unless waves are higher than normal.
- From Shroanef to Finpukal and Malem south to Mosral, the coastal berm tends to be lower and wave overwashing tends to occur when normal tradewind waves coincide with most spring high tides, for example at Fukrin and Pal in Malem (Figure C 2).

It is on the frequency and magnitude of high-tide related flooding that sea-level rise will have the most significant impact.

Inundation from swell wave events

The coastal flooding that affected the northern coastline (Tafunsak, Walung and parts of the Lelu coastline) of Kosrae during the 8 and 9 of December 2008 (Figure C 3) was due to large swell waves generated by a severe storm far to the north of Kosrae. The inundation extent along the Tafunsak coastline is shown in Figure C 4 which shows some particular characteristics:

- The seawall at Tafunsak did not provide any greater protection to the land behind from overwashing waves than the beach sections of coast.
- The extent of inundation was worst over the low-lying land adjacent to the stream outlets at Yekula, Malsu (Senny's Store) and at the old outlet of Infal Mutunte in Tafunsak village).
- Inundation extent was least where there was a largely natural vegetated buffer behind the beach (e.g., between Finaupes/Inkoeya and Sialat) or seawall (such as west of the church in Tafunsak).



Figure C 3: Debris from overwashing of the seawall at Tafunsak (left) and at Malsu (right) during the swell event of 8-9 December 2008.



Figure C 4: Extent of inundation along the Tafunsak coastline during the swell event of 8-9 December 2008. Inundation extent information courtesy of KIRMA.

These large swell events, due to particular storm conditions well north of Kosrae, appear to happen infrequently and generally impact on the northern coastline (Walung, Tafunsak and to a lesser extent the Pukusruk coast of Lelu). Known events include:

- **1979:** A swell wave event damaged the old school buildings in Walung. This is likely to have been the same event in late November 1979 that caused much damage in the Marshall Islands.
- **1969:** In December 1969, two storms in the North Pacific between 40°N and 50°N resulted in swell waves of between 4 m and 6 m (12 to 18 ft) travelling over 7000 km to the south. This is likely to have affected the north coast of

Kosrae as well as the northern coasts of islands in Kiribati, Tuvalu, Samoa, Cook Islands and Tahiti.

- **1961:** On October 13 and 14, large waves inundated parts of Walung causing much damage to property at Insiat and Leap. The waves caused a coconut tree to fall resulting in the deaths of two small children.

Typhoons

Despite no typhoon directly affecting Kosrae since 1905, there is a very real risk that should a typhoon or severe tropical storm track close to Kosrae, catastrophic damage would occur.

Table C 2: Summary of past cyclones experienced on Kosrae.

| Year | Details |
|----------|--|
| 1780? | – |
| 1835/37? | Severe typhoon |
| 1874 | 15 March: Severe storm or typhoon from the south sinks Bully Hayes ship. |
| 1891 | 3–4 March: Typhoon from the south through Kiribati, Kosrae, Pingelap, Mokil, Pohnpei, Chuuk and the Mortlocks. All but six houses left standing and virtually all breadfruit and coconut trees destroyed. |
| 1900? | Typhoon |
| 1905 | 19–23 April: Typhoon lasting seven hours with much destruction of property and trees. |
| 1986 | 19 May: Typhoon Lola passed to the north west of Kosrae. |
| 1992 | 5 January: Typhoon Axel passed 75 km north of Kosrae. Maximum sustained winds of up to 80 knots were recorded resulting in severe crop losses, trees and vegetation damaged, and some wooden and tin-roofed structures destroyed. |
| 2001 | 17 December: Tropical Storm 31W (Faxia) tracked west of Kosrae causing overwashing on the east coast. |

Appendix C

Table C 3: General cyclone tracks and resulting areas on Kosrae most likely to be affected by inundation.

| Typhoon track (westerly movement) | Areas most likely to be inundated |
|-----------------------------------|--|
| North of Kosrae | <ul style="list-style-type: none"> • North-east Lelu, Tafunsak and possibly Walung coastlines. |
| South of Kosrae | <ul style="list-style-type: none"> • All of the Utwe and Malem coastline and possibly parts of the Lelu coastline. • A cyclone tracking just south of Kosrae is likely to cause the most significant inundation-related damage. |
| Directly over Kosrae | <ul style="list-style-type: none"> • Inundation-related damage would be most significant on the right-hand side of the typhoon track. • The most significant inundation is likely to occur along the Malem and/or Lelu coastlines. • Tafunsak, Walung and Utwe coastlines may also experience inundation as the typhoon passes over Kosrae. |

Many of the typhoons that affect Guam and the western FSM islands originate in the region around Kosrae as tropical depressions and tropical storms, developing into full typhoons further to the west and north. Typhoons tend to occur between June and November and are more likely to track closer to Kosrae during El Niño phases.

Whilst strong winds are likely to cause most of the damage, higher sea levels due to storm surge (only if the cyclone tracks close or directly over Kosrae), and large waves (which also increases the water level at the shoreline due to wave set-up on the fringing reef) would cause significant wave overwashing and inundation of the immediate coastal margins. Inundation would also be exacerbated by heavy rainfall which would cause flooding of low-lying swamp and agricultural areas.

The location and severity of wave overwashing, inundation and resulting damage depends on the track of the typhoon relative to Kosrae. Typically typhoons track in a westerly direction and are more likely to occur to the north of Kosrae.

Virtually everyone on Kosrae lives on land that is less than 4 m (12 feet) above mean sea level. All of this land is at very high risk from the impacts of a typhoon with there being potential for significant loss of life and destruction of a high percentage of residential property from the effects of wind and storm surge and waves.

The areas potentially at greatest risk are those parts of the coastline fronted by a narrow reef with low-lying swamp land behind a narrow strip of coastline, such as:

- Finfokoa to Pukushruk in Lelu.
- Virtually all of the Malem coastline.
- The southern part of Utwe village.

Furthermore, all of Kosrae's infrastructure (roads, utilities) are located on low land close to the coastline. If a typhoon were to directly affect Kosrae there would be significant damage to the road, disruption to traffic between villages, and loss of much power and telecommunication infrastructure. Existing coastal defences will not protect the coastline, or the land, property and infrastructure behind, from the effects of high water levels and waves caused by a typhoon.

A typhoon or severe storm could also destroy much of the mature mangrove areas such as those at Okat and Yela and have a short term impact on the coral reef. However, typhoon events are also a vital natural process in limiting long-term coastal erosion by re-supplying sand, cobbles and coral rubble to the reef flat and coastline from the coral reef.



A photograph of a beach with waves breaking in the distance under a clear blue sky. The water is a vibrant greenish-blue, and the sky is a clear, bright blue. The waves are breaking in the distance, creating white foam. The overall scene is a serene coastal landscape.

Appendix D

Climate change and sea-level rise

Background

The most recent assessment of past and potential future climate change was carried out by the Australian funded Pacific Climate Change Science Program. For the FSM this concluded that for the course of the 21st century:

- Surface air temperature and sea surface temperature are projected to continue to increase (very high confidence).
- The intensity and frequency of days of extreme heat are projected to increase (very high confidence).
- Ocean acidification is projected to continue (very high confidence).
- Mean sea-level rise is projected to continue (very high confidence).
- Annual and seasonal mean rainfall is projected to increase (high confidence).
- The intensity and frequency of days of extreme rainfall are projected to increase (high confidence).
- The incidence of drought is projected to decrease (moderate confidence).
- Tropical cyclone numbers are projected to decline in the tropical North Pacific Ocean basin (0–15°N, 130°E–180°E) (moderate confidence).

The assessment also concluded that a warming trend was evident for Pohnpei and Yap in annual and seasonal mean air temperatures for the periods 1950–2009 and 1951–2009 respectively but that annual and seasonal rainfall trends were not statistically significant.

Sea levels have also risen within the FSM, with increasing global sea levels a well-established consequence of global

climate change. The following sections provide background information on sea-levels and sea-level change on Kosrae.

What influences sea levels around Kosrae?

The level of the sea around Kosrae is influenced by a number of components:

- **The astronomical tide:** The twice-daily rise and fall of water has the largest influence on the particular sea-level occurring at any time. High and low tide times and levels can be accurately predicted many years in advance. Over a year, tide levels on Kosrae tend to be higher between November and February (Figure D 1). Most coastal flooding occurs on Kosrae when larger than normal waves coincide with high tide conditions. However, tide levels can be elevated (or lowered) by a number of factors outlined below.
- **The 2 to 5 year El Niño Southern Oscillation (ENSO) cycle:** During El Niño phases sea levels around Kosrae are pushed down (resulting in lower high tide levels), and conversely during La Niña phases sea levels are pushed up, (resulting in higher high tide levels), Figure D 2. These effects can occur over a number of months to a year or more and can result in reductions in sea levels during strong El Niños of up to 20 to 25 cm (8 to 10 inches) and increased in sea levels during strong La Niñas of up to 15 to 20 cm (6 to 8 inches), Figure D 3. However for about 80% of the time fluctuations in mean level of the sea are within ± 0.1 m (± 4 inches).
- **Decadal/Inter-decadal Pacific Oscillation:** Over longer 20

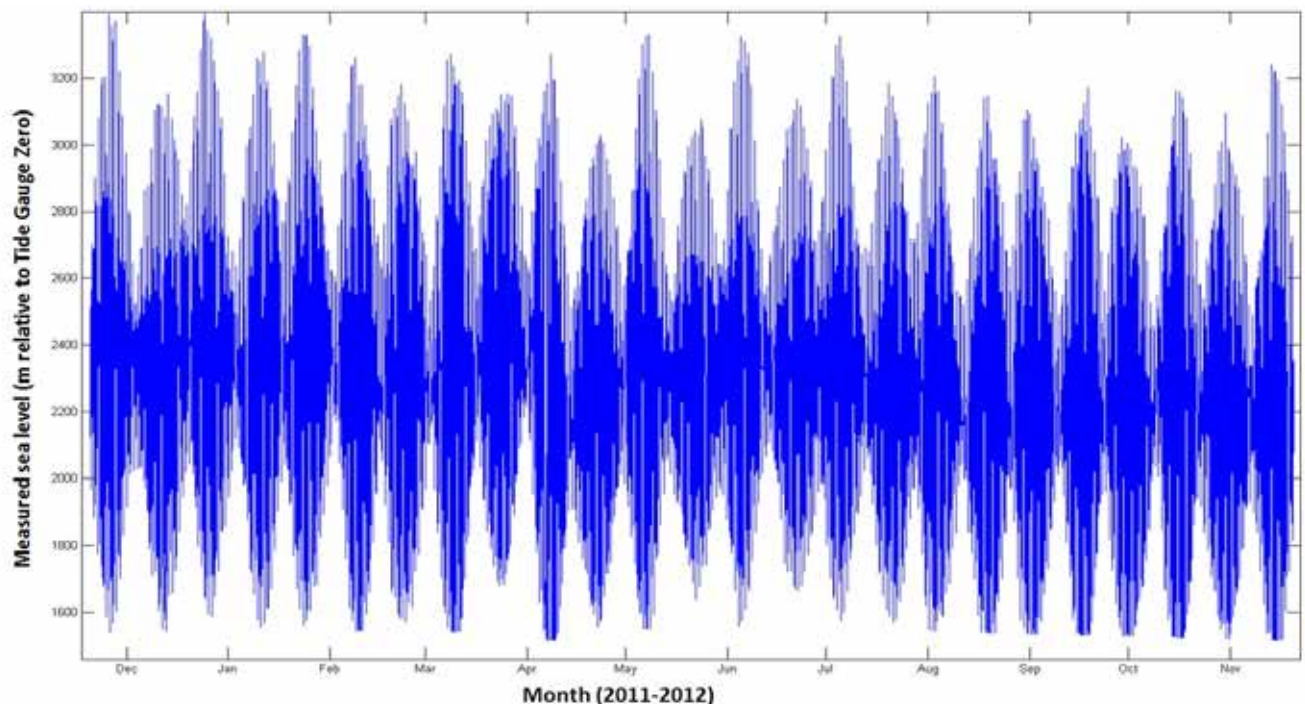


Figure D 1: Measured sea levels within Lelu Harbour between 20 November 2011 to 20 November 2012.

to 30 year cycles a climate-ocean feature known as the Pacific Decadal Oscillation (DPO) or Interdecadal Pacific Oscillation (IPO) influences the frequency and intensity of ENSO events. Between about 1978 to 2000, the IPO

was in a phase where El Niño events were stronger and more frequent, hence sea levels over this period tended to be lower on average. Since around 2000 the IPO has been in a phase where La Niña events have been more

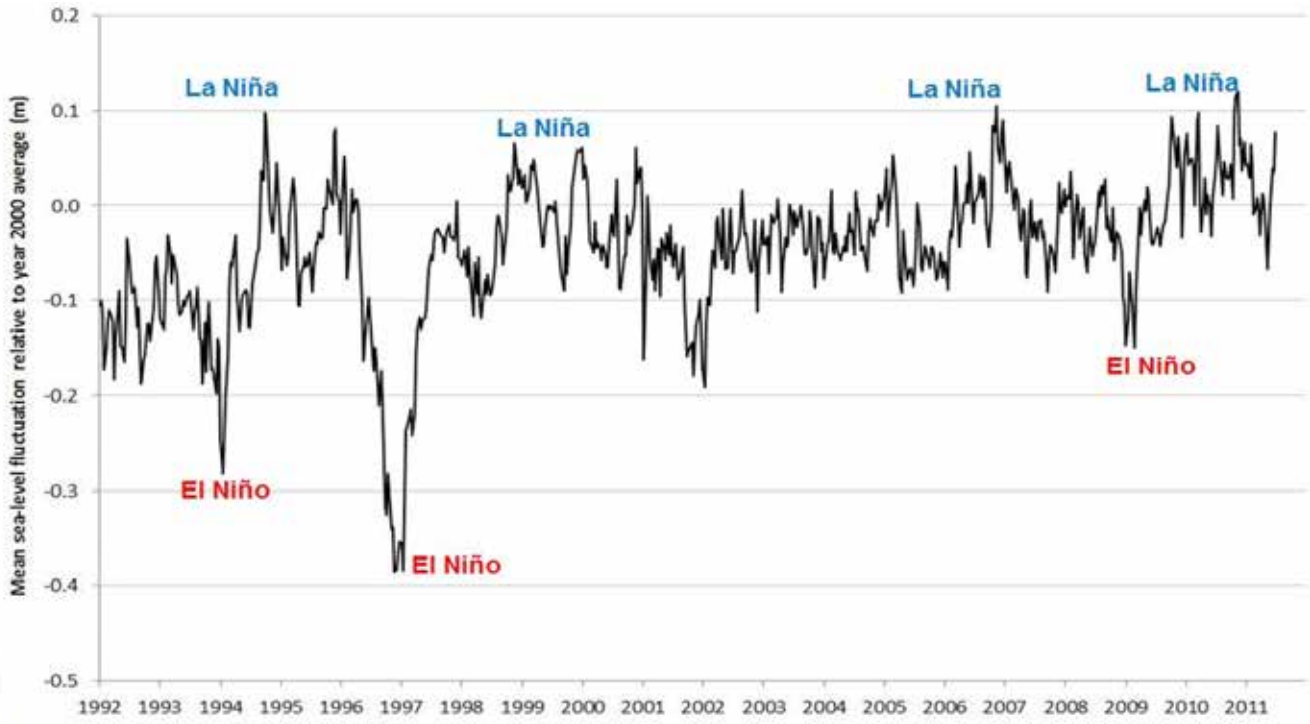


Figure D 2: Mean sea-level fluctuations between 1992 and 2012 for Kosrae showing effects of El Nino and La Nina periods on sea levels. Sea level anomalies measured by satellite and downloaded from <http://sealevel.colorado.edu/content/interactive-sea-level-time-series-wizard>.

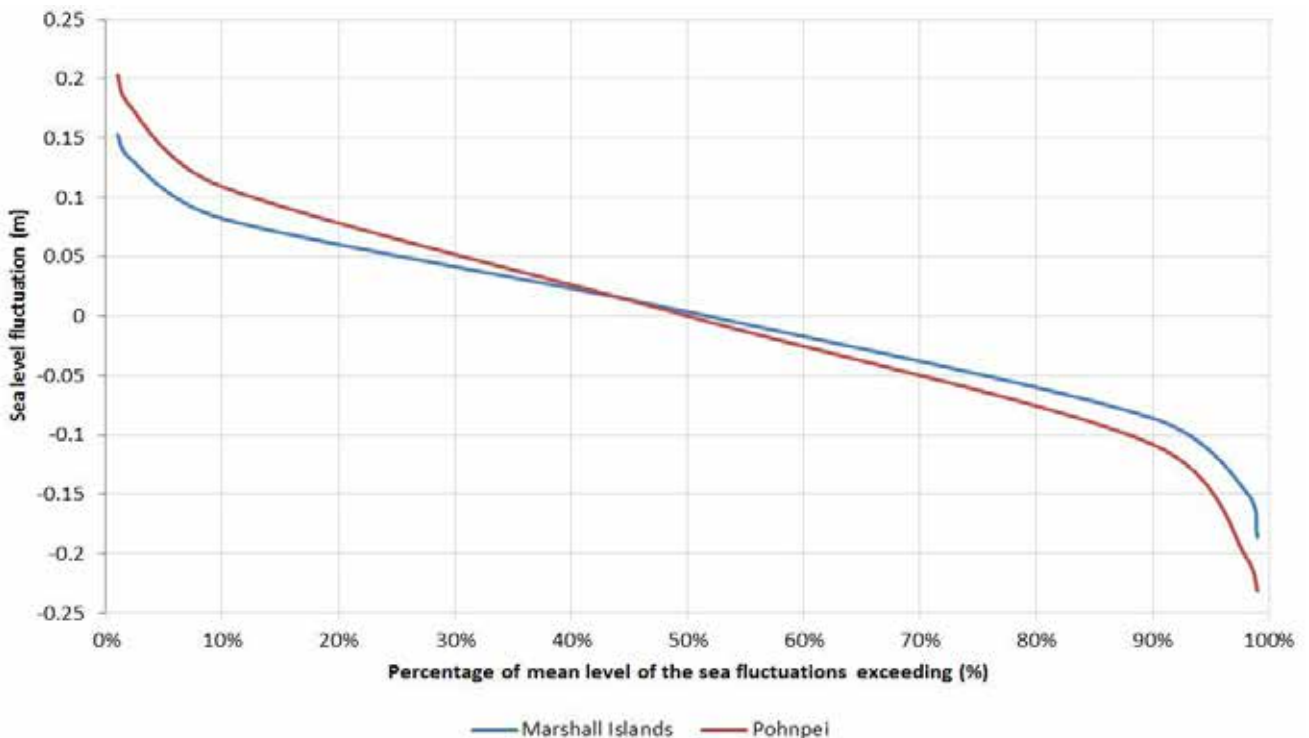


Figure D 3: Percentage exceedence in mean level of the sea fluctuation for Pohnpei and the Marshall Islands.

Appendix D

common resulting in more frequent and higher sea levels relative to the twenty year period prior to 2000.

- **Storm surge:** Storm surge is the temporary increase in sea level over 1 to 3 days due to a reduction in atmospheric pressure and influence of wind on the sea surface. Due to the lack of severe storms and cyclones affecting Kosrae, storm surge only ever has a very minor influence (few cms) on sea levels. Only if a severe typhoon was to pass close to Kosrae would storm surge result in any significant increase short-term in sea levels.
- **Wave setup:** On ocean shorelines, the effect of large waves breaking on the seaward edge of the reef raises (sets up) water levels over the reef flat. This has a much larger influence on sea levels along the ocean shorelines than storm surge. This can raise reef flat water levels by up to about 1 m (more during a large typhoon event), particularly during large swell conditions such as the event that affected the Tafunsak coastline on the 8-9th December 2008.
- **Sea-level rise:** The long-term increase in sea levels due to increasing global temperatures resulting primarily in a warming of the oceans causing them to expand, and melting or discharge of ice sheets and glaciers on land.

How much have sea levels risen around Kosrae?

Increasing global sea levels are a well-established consequence of global climate change. Measurements of mean sea-level changes over the last two centuries have primarily come from long-term data from tide gauges mounted on land, supplemented since around 1993 by measurements made by satellites. The longest records suggest that the rate of rise of global mean sea levels began to increase from around the early to mid-1800s compared with a relatively stable sea level in the preceding century.

The latest Intergovernmental Panel for Climate Change (IPCC) Fifth Assessment Report concluded that

“it is virtually certain that the rate of global mean sea level rise has accelerated during the last two centuries. It is very likely that the mean rate was 1.7 [1.5 to 1.9] mm per year between 1901 and 2010 for a total sea level rise of 0.19 [0.17 to 0.21] m. Between 1993 and 2010, the rate was very likely higher at 3.2 [2.8 to 3.6] mm per year; similarly high rates likely occurred between 1930 and 1950. It is likely that global mean sea level has accelerated since the early 1900s, with estimates ranging from 0.000 to 0.013.”

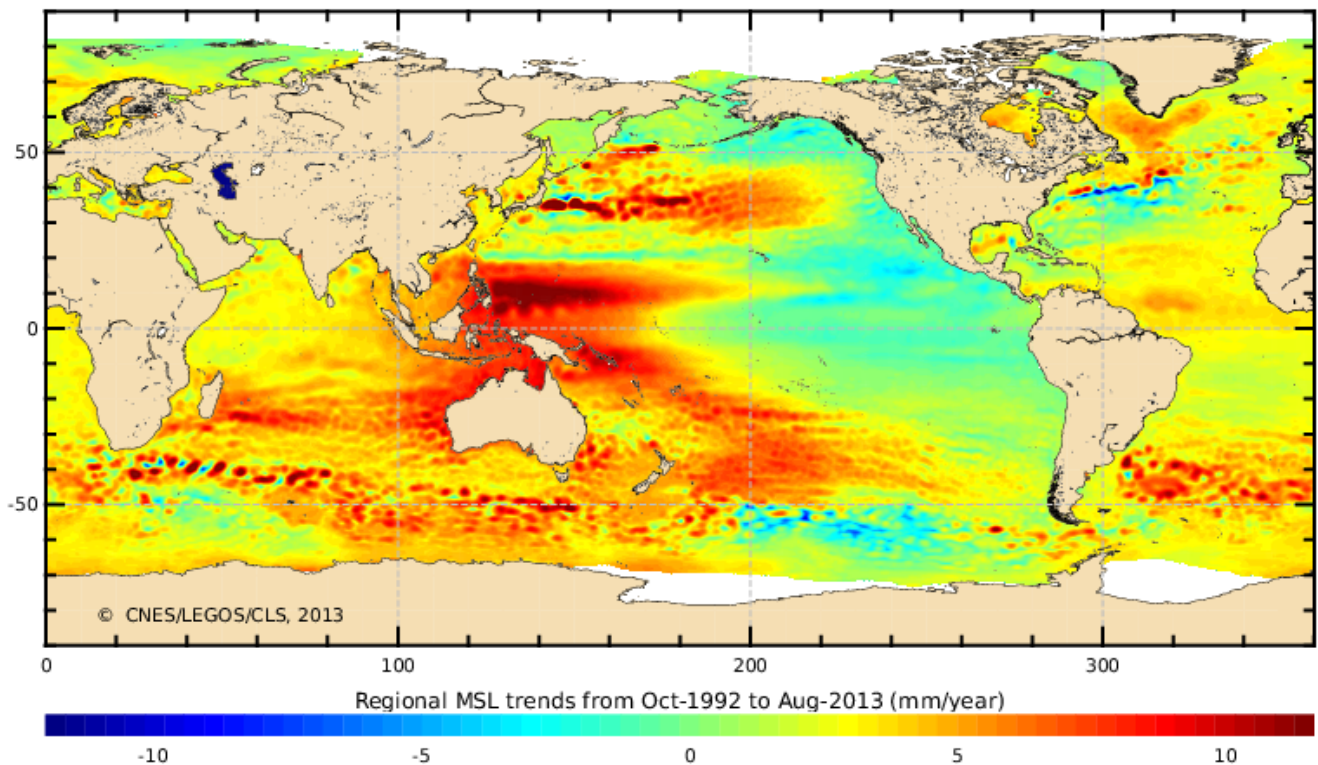


Figure D 4: Global distribution of the rate of absolute sea-level rise between October 1992 and April 2013 as measured by satellite altimeter data. Source: <http://www.aviso.oceanobs.com/en/applications/ocean/mean-sea-level-greenhouse-effect/regional-trends.html>.

The rate of rise of sea levels across the globe is far from uniform. In some places, notably the western Pacific, sea levels have been rising rapidly (> 10 mm a year in some places), in others it has fallen. Since 1993 these regional differences have been measured by satellite and are shown in Figure D 4. The higher rates of sea level rise in the western Pacific over the last ten years (significantly higher than global average rates) are not necessarily an indication of long term increased rates of sea-level rise. Rather it is largely thought to be due to tradewind and oceanographic influences predominantly attributable to inter-decadal variability and not necessarily primarily due to a long-term higher rate of sea-level rise.

Sea-levels are also measured at particular locations by sea-level gauges. In Kosrae a sea level gauge was installed in Lelu Harbour in November 2011. However, there needs to be at least around 25 years of sea-level records before some judgement of long-term relative sea-level rise rates can be made. Longer-records, albeit still less than 25 years, are available from the SEAFRAME tide gauge network for surrounding islands to Kosrae (Pohnpei, Marshall Islands, Nauru). Given the length of records, particularly at Pohnpei there will continue to be monthly and annual variations in the rate of sea-level rise over the foreseeable future.

Table D 1: Relative sea-level rise rates on surrounding islands to Kosrae from the SEAFRAME tide gauge network. Source: <http://www.bom.gov.au/ntc/IDO60101/IDO60101.201206.pdf>.

| Island | Period of record | Rate of sea level rise (mm/year) |
|------------------|-------------------|----------------------------------|
| Pohnpei | Dec 2001–Jun 2012 | +17.8 |
| Marshall Islands | May 1993–Jun 2012 | +5.7 |
| Nauru | Jul 1993–Jun 2012 | +4.0 |

Is storm surge increasing?

Storm surge (the short term increase in sea level due to low atmospheric pressure and influence of wind) is a very minor component (except if a typhoon were to occur) of the sea levels experienced in Kosrae. There is nothing obvious to suggest that storm surge has increased in magnitude or frequency or will do so.

Are king tides becoming more frequent?

King tide is a popular name referring to any high tide or sea level that is well above an average height. Over much of the last ten years or so the perception is that king tides have become more frequent. This is indeed likely and is due to a combination of an increased frequency of La Niña events (compared to the period prior to 2000) which has pushed sea levels up and is further exacerbated by the decadal elevation of sea level (e.g., Figure D 4) and sea-level rise.

Long-term sea-level rise will continue to push sea levels higher resulting in high tide levels increasingly exceeding what may be presently considered a king-tide level.

How much sea level rise will occur in the future?

Sea levels will continue to rise primarily because of thermal expansion within the oceans and loss of ice sheets and glaciers on land. How much sea-level rise occurs depends on how humans continue to live and emit greenhouse gases. However, even if greenhouse gas emissions were stabilised today, sea levels would continue to rise. Indeed sea levels to about 2050 are relatively insensitive to changes in emissions over this timeframe because of the long time it takes the oceans to respond to changes in carbon dioxide and atmospheric temperatures, but future changes and trends in emissions become increasingly important in determining the magnitude of sea level rise beyond 2050.

The basic range of projected global mean level rise estimated in the Intergovernmental Panel for Climate Change Fourth Assessment Report (AR4) is for a rise of 0.18 m to 0.59 m (relative to the 1980-1999 average) with potentially an additional 0.1 to 0.2 m in the upper estimates due to additional ice sheet discharge if contributions to sea-level rise were to grow linearly with global temperature change for each emission scenario (Figure D 5). It was also clearly stated that larger contributions from the Greenland and West Antarctic ice sheets over this century could not be ruled out. Subsequently, the increasing component of present-day

Appendix D

sea-level rise due to ice-sheet losses has led to a number of more recent estimates of sea-level rise over the 21st century.

These sea-level rise projections are similar in magnitude to the recently released Intergovernmental Panel for Climate Change (IPCC) Fifth Assessment Report . This concluded that the rate of global mean sea level rise during the 21st century will exceed the rate observed during 1971–2010 due to increased ocean warming and loss of mass from glaciers and ice sheets. For the period 2081–2100, compared to 1986–2005, global mean sea level is likely to be between 0.26–0.54 m for the lowest emission scenario considered (Representative Concentration Pathway scenario, RCP2.6) to between 0.45–0.81 m for the highest emission scenario (RCP8.5). The latter scenario corresponds to a rise by 2100 of between 0.53–0.97 m.

The IPCC Fifth Assessment Report also concluded that based on current understanding, only the collapse of marine-based sectors of the Antarctic Ice Sheet, if initiated, could cause global mean sea level to rise above the likely range during the 21st century. This potential additional contribution cannot be precisely quantified but there is medium confidence that it would not exceed several tenths of a meter of sea level rise during the 21st century.

How much sea level rise should we allow for when planning development and infrastructure?

As we don't know exactly how much greenhouse gases will be emitted in the future and what the response of the large ice sheets in Greenland and Antarctica will be to rising temperatures, it is difficult to provide a best or upper estimate of sea-level rise over this century.

Deciding on an appropriate sea-level rise amount to accommodate for a particular decision depends on a pragmatic decision based on a balance between the level of risk that is willing to be accommodated and the associated costs of addressing that level of risk. Essentially it comes down to a balanced consideration between:

- The possibility of a particular sea-level being reached within the planning timeframe or design life. For example over the next 100 years there is a faint possibility that mean sea levels could rise by 2 m but it is much less likely than sea levels rising by 1 m. However, we cannot say for certain for example whether a 0.7 m rise is more or less likely than a 1 m rise over this time period (however, bearing in mind that beyond 2100 sea levels will continue to rise).

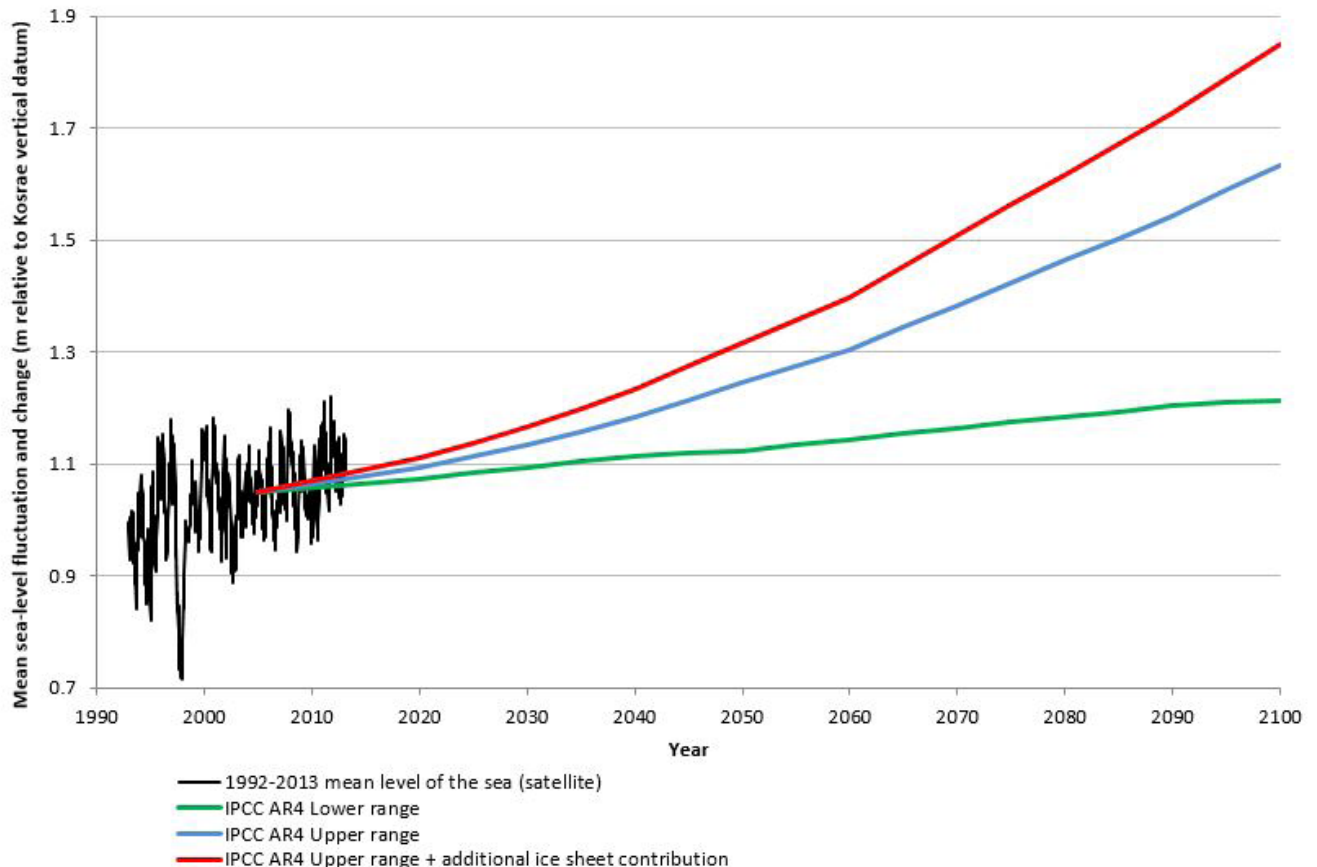


Figure D 5: Absolute mean level of the sea measured at Kosrae by satellite between 1992 and 2013 and the range in IPCC AR4 sea level projections out to 2100. All levels are relative to Kosrae vertical datum based on a comparison between mean level of the seas from satellite and the Kosrae tide gauge at Lelu between November 2011 to November 2012. The sea level projections have been adjusted to 2000-2009 average.

- The associated consequences and potential adaptation costs. For example the consequences of a 2 m rise in sea level are in most cases likely to be much greater than a 1 m rise in sea level, likewise the costs of accommodating a 2 m rise in mean sea level would be much greater than a 1 m rise.
- How any residual risks would be managed for any

consequences if sea-level rise occurs at a quicker rate than that accommodated.

As a pragmatic start, Table D 2 provides suggested sea-level rise amounts to be accommodated for coastal-related development, infrastructure and hazard planning activities for the remainder of this century.

Table D 2: Suggested relative sea-level rise allowances relative to the present day for development planning and infrastructure design. The present day is assumed to be the 2000–2009 average.

| Timeframe/Design life | Generational timeframe | Sea level rise (m) | Sea-level rise (feet) |
|-----------------------|------------------------|--------------------|-----------------------|
| 2030s | 1 generation | 0.15 | 0.5 |
| 2050s | 2 generations | 0.3 | 1 |
| 2070s | 3 generations | 0.6 | 2 |
| 2090s | 4 generations | 0.9 | 3 |

How much more frequently will present-day high tide levels occur in the future?

Using the sea-level rise allowances over the four different future timeframes in Table D 2, Figure D 6 shows how frequently the high tide levels are expected to be exceeded in Kosrae. A high tide level of 2 m (relative to vertical land datum on Kosrae) is presently a very high tide on Kosrae. A high tide of 2 m is currently only exceeded on average by 2.8% of all high tide levels. Put another way, approximately 97% of all high tides in Kosrae are less than 2m high. However, with sealevel rise these statistics will change, by the:

- 2030s, the high tide level of 2 m will be exceeded by 12% of all high tides.
- 2050s, the high tide level of 2 m will be exceeded by 27% of all high tides.
- 2070s, the high tide level of 2 m will be exceeded by 69% of all high tides.
- 2090s, the high tide level of 2 m will be exceeded by 95% of all high tides.

Essentially by the end of the century, assuming the sea-level rise rates indicated in Table D 2 eventuate, virtually every high tide which occurs on Kosrae will be above what is presently considered a very high (king) tide level. Figure D 7 shows the same exceedence plot as Figure D 6 but with the levels in feet relative to Kosrae’s vertical datum. Also shown is the level of the road at Tafuyat (solid black horizontal line) which, at a level of around 9 feet relative to the vertical land datum, and is one of the lowest sections of the coastal road. The exceedence plot shows that for high tide and mean sea-level fluctuations in the:

- 2070s, the road at Tafuyat will be inundated only on the very highest of tides.
- 2090s, the road at Tafuyat will be inundated on average by 14% of high tides.

Appendix D

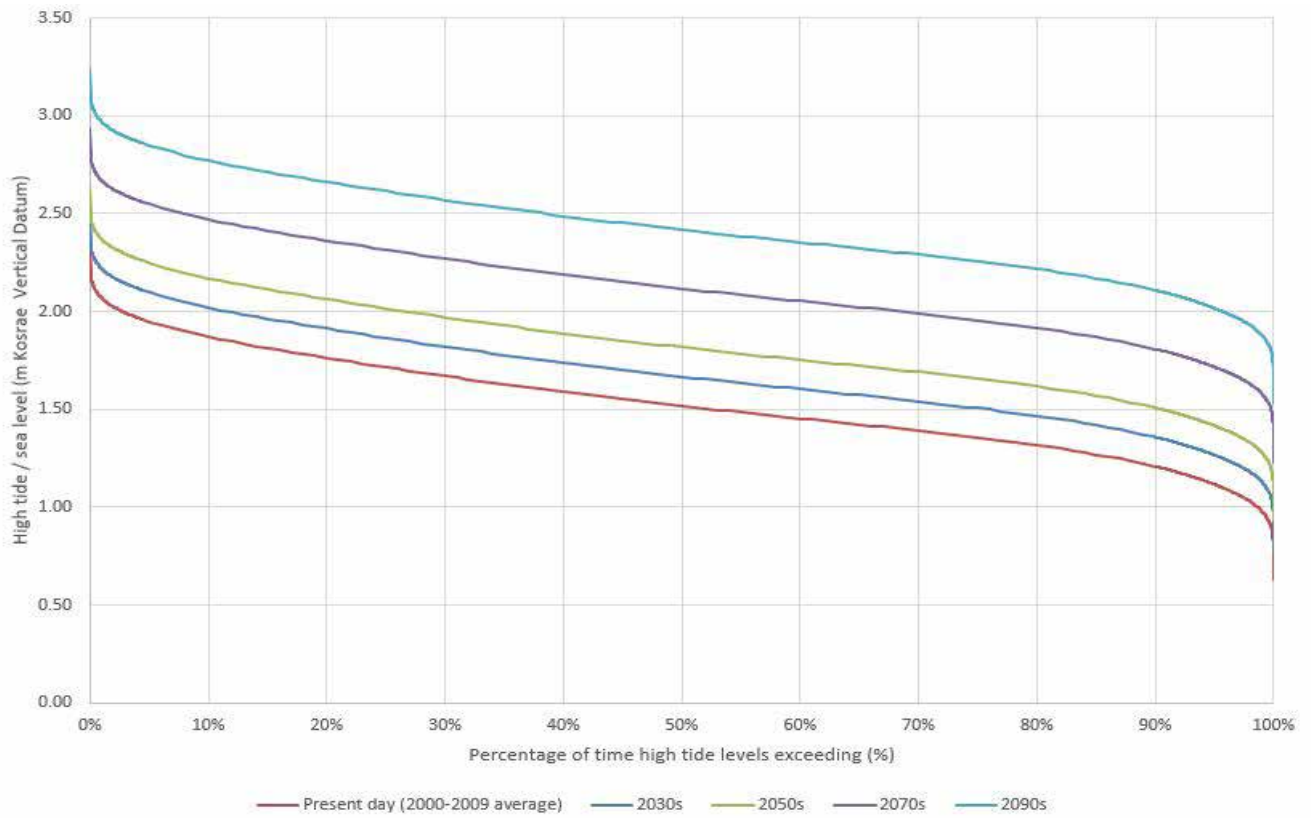


Figure D 6: High tide exceedence curves for the present day and for the 2030s, 2050s, 2070s and 2090s.

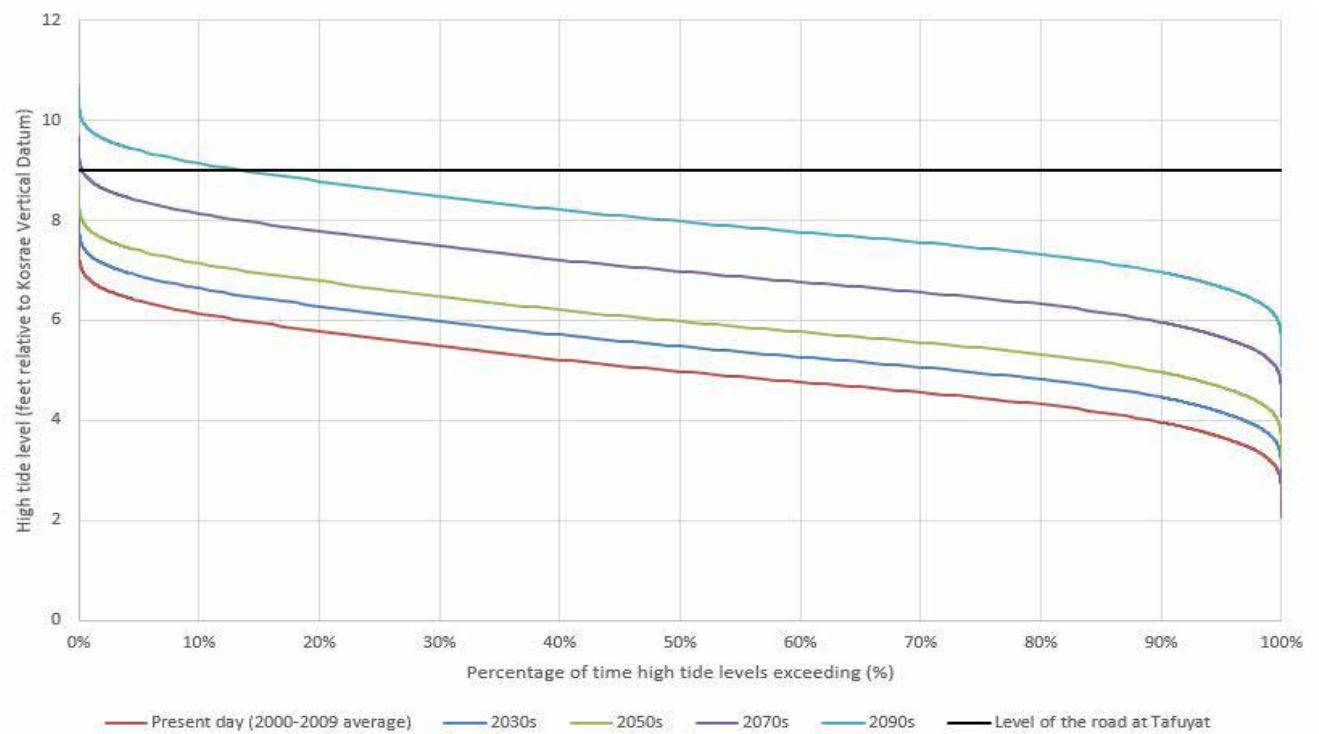


Figure D 7: High tide exceedence curves for the present day and for the 2030s, 2050s, 2070s and 2090s relative to the level of the road at Tafuyat.

What effects will climate change have on other factors influencing coastal hazards?

Much less is known about how climate change will affect other factors that influence coastal hazards (such as swell and wave conditions, storm frequency and intensity and influence of El Niño). However:

- Large swell events, such as occurred in December 2008, will occur occasionally in the future. Climate change is unlikely to have any noticeable change in the frequency of occurrence of such events (although sea-level rise may result in such events causing more significant or damaging inundation).
- A typhoon could potentially significantly impact Kosrae, most likely during an El Niño phase. At present there is little evidence to suggest that climate change will alter the potential for a typhoon to impact on Kosrae – indeed there is some indication that with climate change typhoons may track slightly further north. Whilst Kosrae has not directly experienced a typhoon for over a century there is still a small chance that a typhoon will impact Kosrae in the future.

How will sea-level rise affect overwashing of land and seawalls?

Increases in sea level, and hence increased water depths over the reef flats, will result in larger wave conditions reaching the shoreline on Kosrae. As both wave run-up and overwashing of the beach or coastal defences can be extremely sensitive to small changes in water levels and wave conditions reaching the shoreline, even very small changes in sea-level rise may have a significant impact on the frequency and volume of inundation of the immediate coastal margins of the ocean shorelines of Kosrae.

How will sea-level rise affect low-lying swamp or farm land areas between the coastal berm and the volcanic part of the island?

Increases in sea level (and rainfall) will also affect drainage of low-lying swamp and farm land areas behind the coastal berm leading to an increased frequency of waterlogging and flooding of land, reduced effectiveness of drainage, and potentially increased frequency of drainage and stream outlet blockage at the coast.



